



# WRAPAROUND

## WHO200 (4FT) SERIES (8' AVAILABLE)

HIGH IMPACT WRAPAROUND LUMINAIRE




DATE	
JOB	

WWW.LALIGHTING.COM  
626-454-8300

### APPLICATIONS

COMMERCIAL, CLASSROOM

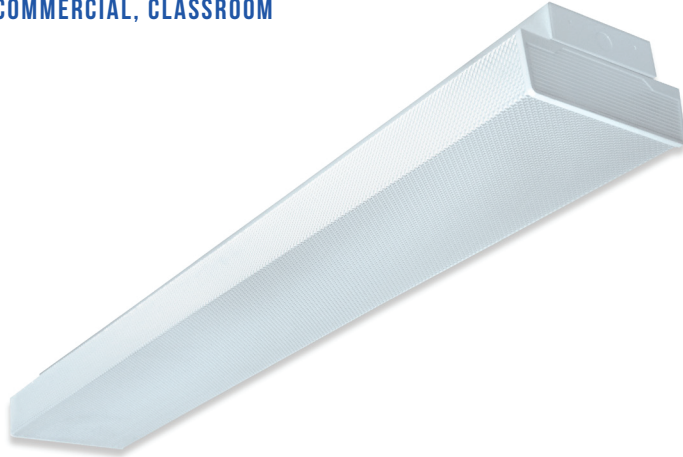

### SPECIFICATIONS

#### FEATURES

- Surface / suspension mounted LED luminaire
- 0-10V dimming driver standard (other dimming types available)
- Controls and sensors available
- Wireless control options (Lutron, EnOcean, ZigBee, etc.)
- Supports California Title 24 compliance
- Suitable for damp locations
- Additional lumen packages and color temperatures available
- Full customization available upon request

#### CONSTRUCTION

- 22 ga. cold rolled steel welded housing
- Canopy suspension system available

#### OPTICAL

- High impact clear prismatic acrylic lens (minimum 0.125 thickness)
- Lens secured by spring loaded barrel latches


#### ELECTRICAL

- High efficiency drivers coupled with long-life LEDs
- Service life tested at 50,000-306,000 hours (L70), 84,000 (L90)
- Universal voltage 120V through 277V (347V / 480V available)
- Emergency battery pack available


#### FINISH

- Baked white powder coated finish
- Painted after fabrication
- Minimum reflectance 90%

### DIMENSIONS

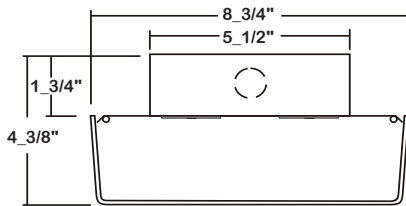

- ✦ 11/16" STEM MTG. K.O.
- ✦ 7/8" OFFSET K.O.
- ✦ 2" K.O.



### ORDERING INFORMATION

EXAMPLE: WHO200-6-4L-DRP3-BPL1.5-DRDM-UNV-2/840

SERIES	LED LUMEN PACKAGE	NOMINAL LENGTH	OPTICAL	ELECTRICAL	DRIVER	VOLTAGE	# OF LED ROW	CRI / CCT
<b>WHO200</b>		<b>4L</b>				<b>UNV</b>	<b>2</b>	
<b>WHO200</b> High Impact Wraparound LED Luminaire	<b>3</b> Nom. 3000 Lumens <b>4</b> Nom. 4000 Lumens <b>6</b> Nom. 6000 Lumens <b>8</b> Nom. 8000 Lumens <i>*Additional Lumen Packages Available</i>	<b>4L</b> 4'	<b>DRP3</b> High Impact Clear Prismatic Acrylic Min. 0.125 Thickness	<b>BPL1.5</b> Emergency Battery Pack  <b>MS</b> Motion Sensor  <b>SDxx</b> Step Dimming Control  *Leave Blank if Not Specified  <i>Additional Motion Sensor Options</i> <i>Additional Electrical Options</i>	<b>DRDM</b> 0-10V Dimming Driver  <i>Additional Driver Options</i>	<b>UNV</b> 120V-277V  <i>*Additional Voltages Available</i>	<b>2</b> Two LED Rows	<b>835</b> 80+CRI / 3500K Color Temp.  <b>840</b> 80+CRI / 4000K Color Temp.  <b>850</b> 80+CRI / 5000K Color Temp.  <i>*Additional Color Temp. Available</i>



Los Angeles Lighting Mfg. Co.  
Contact Us  
T: 626-454-8300  
F: 626-454-8399  
www.lalighting.com

10141 Olney Street  
El Monte, CA 91731  
Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2022 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 08/15/17



SYSTEM DATA

NOMINAL SIZE	LED LUMEN PACKAGE	OPTICAL OPTION	CRI / CCT	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	FLUORESCENT / HID EQUIVALENT	IES FILES
4'	3000 lm**	DRP3	840	3022 lm	22.2 W	136.3 lm/W	1-F32T8	*
	4000 lm*	DRP3		4058 lm	31.0 W	130.8 lm/W	2-F32T8, 1-F54T5HO	*
	6000 lm*	DRP3		5628 lm	45.9 W	122.6 lm/W	3-F32T8	*
	8000 lm	DRP3		7200 lm	67.4 W	106.8 lm/W	4-F32T8, 2-F54T5HO, 175 W (MH)	<a href="#">LA-T2442</a>


NOTE:

System data above is based on 120V input voltage.

Actual performance may differ as a result of end-user environment and application.

This fixture has been tested and listed in accordance with UL Standards. L.A. Lighting certifies that it will operate safely when installed properly, and within an ambient temperature range from -20°C to 40°C.

ACCESSORIES



433B

- Blank canopy with cable
- No power cord
- Cable length 48" and 96"
- Max. weight 196 lbs. per set


433B - 48 W

COLOR

- W White Standard
- B Black

CABLE LENGTH

48" and 96" Standard  
(other lengths as specified)



444F

- Feed-in canopy with straight cord
- Includes power cord
- Cable length 48" and 96"
- Max. weight 196 lbs. per set

444F-48SW-2C

# OF CIRCUIT

- 2C Two Circuits
- LV 0-10V Dimming
- Leave blank for one circuit

COLOR

- W White Standard
- B Black

CORD TYPE

- S Straight Cord

CABLE LENGTH

48" and 96" Standard  
(other lengths as specified)



Los Angeles Lighting Mfg. Co.  
Contact Us  
T: 626-454-8300 10141 Olney Street  
F: 626-454-8399 El Monte, CA 91731  
www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2022 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 08/15/17

