



# WRAPAROUND

## CIT100 SERIES



## Fully Gasketed Enclosure Luminaire



- Fiberglass Housing and Polycarbonate Latches
- Poured In Place Polyurethane Gasket
- Polycarbonate Lineal Ribbed Lens
- Suitable for Damp Locations
- IP65 Rated Enclosure
- Available with :
  - Fluorescent, LED and LED T8 (Internally Driven)
  - Variety of Lenses
  - Stainless Steel Mounting Brackets
  - Stainless Steel Chain Mount V-Hooks
  - Stainless Steel Latches
  - Tamper Proof Screws
  - 95% Enhanced Specular Aluminum Reflectors
  - NSF - Splash Zone / Non-Food Zone



Photometric Data and IES Files are Available on [www.lalighting.com](http://www.lalighting.com)



**LOS ANGELES LIGHTING MFG. CO.**

10141 OLNEY ST. / EL MONTE, CA 91731


TEL : 626-454-8300 FAX : 626-454-8399

[www.lalighting.com](http://www.lalighting.com)




# CIT100 SERIES

## CROSS SECTION

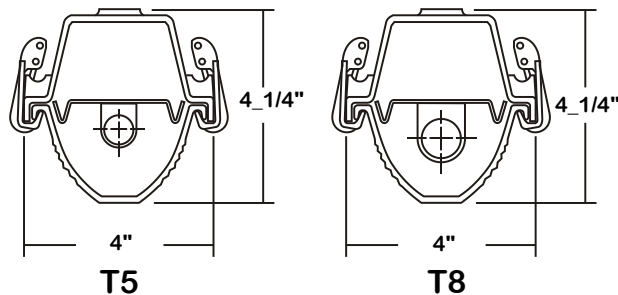

## BACK PLATE

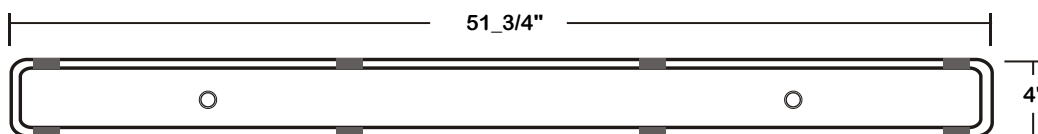

## CATALOG NUMBER

	NOMINAL LENGTH	TOTAL LAMPS
CIT100-1-4R <sub>1,2,3</sub>	4'	1
CIT100-1-4M-E5 <sub>1,2,3</sub>	4'	1
CIT100-1-4M-E5H <sub>1,2,3</sub>	4'	1

\*Certification Note: 1 - UL Damp Location 2 - UL Wet Location  
3 - NSF Splash Zone


## CIT1/SSMB- MOUNTING BRACKET

- Corrosion resistant stainless steel bracket, two brackets per set.
- Fixture snaps securely into place, mounting method does not require stud in fixture.




## ORDERING GUIDE

SPECIFIED



EXAMPLE



**NOTE: LAMP/WIRING\*** M= Miniature Bi-Pin T5 R = Medium Bi-Pin T8

## CIT/SSV- CHAIN MOUNT V-HOOK

- Corrosion resistant stainless steel V-hooks for chain mount applications, two hooks per set.
- Hooks work in conjunction with stainless steel mounting brackets (CIT1/SSMB), mounting brackets sold separately.



## OPTIONS AND ACCESSORIES

<ul style="list-style-type: none"> <li>● <b>REFLECTOR OPTIONS</b></li> <li>Specular Aluminum Reflector (95%)</li> </ul>	SUFFIX SR	<ul style="list-style-type: none"> <li>● <b>MECHANICAL OPTIONS</b></li> <li>Wet Location (Two Mtg. Brackets and One Watertight Hub Provided)</li> <li>Stainless Steel Latches</li> <li>Stainless Steel Tamper Proof Screws</li> <li>NSF - Splash Zone / Non - Food Zone</li> </ul>	SUFFIX WL SSL TP SZ	<ul style="list-style-type: none"> <li>● <b>BALLAST OPTIONS</b></li> <li>Electronic T5</li> <li>Electronic T5HO</li> <li>Electronic Step Dimming T5HO</li> <li>Electronic T8</li> <li>Electronic Step Dimming T8</li> </ul>	SUFFIX E5* E5H ESDM5H E8* ESDM8*
<ul style="list-style-type: none"> <li>● <b>OPTICAL OPTIONS</b></li> <li>Polycarbonate Ribbed Lens</li> <li>High Impact Ribbed Acrylic Lens</li> <li>High Impact Ribbed Acrylic Lens Frosted</li> </ul>	SUFFIX PCRL DRRL DRRLFR	<ul style="list-style-type: none"> <li>● <b>ELECTRICAL OPTIONS</b></li> <li>Emergency Battery Pack</li> <li>External Line Fusing (HLR/GLR)</li> </ul>	SUFFIX BP* ELF	<ul style="list-style-type: none"> <li>● <b>ACCESSORIES</b></li> <li>Stainless Steel Mounting Brackets</li> <li>Stainless Steel Chain Mount V-hooks</li> <li>- Work with SSMB</li> </ul>	CAT. NO. CIT1/SSMB CIT/SSV

\*See Appropriate Reference Page

## SPECIFICATIONS

- **TYPE**
- **CONSTRUCTION**
- **FINISH**
- **OPTICS**
- **WIRING**
- **LABELS**

Surface mounted, fully enclosed and gasketed luminaire for installation in damp or wet locations as specified. Fiberglass housing. 22 ga. cold rolled steel internal snap-on gear tray/cover with safety strap attached. Gear tray - Baked white polyester finish, minimum reflectance 86%. (Powder coated finish available.) Polycarbonate lens, lineal ribbed lens design. Lens secured to fiberglass housing by polycarbonate latches, stainless steel latches available. UNV (universal voltage 120v thru 277v.) ballasts as available, or as otherwise specified. U.L. Listed. Suitable for damp locations.

