

LED T8 - RECESSED

FHL320 SERIES

2X2/2X4 Premium Grade Trim Flange Luminaire



- 2x2 & 2x4, Premium Grade Trim Flange Luminaire For LED T8 Light Tube (by Others)
- One Piece Welded Trim Flange Painted After Fabrication
- 20 Gauge Steel or Extruded Aluminum Door Frame Screwed At Each Corner
- Door Frame Painted After Fabrication
- T-Hinge And Spring Loaded Latch

- Available with:
Heavy Duty Safety Switch
Extensive Variety of Lenses



LOS ANGELES LIGHTING MFG. CO.


10141 OLNEY ST. / EL MONTE, CA 91731

<http://www.lalighting.com>

TEL : 626-454-8300 FAX : 626-454-8399

FHL320-4-4L-PA-LED8

TEST NO.=LA-T1786-1
LAMP TYPE=LED T8, 4'
NO. OF LAMP=4
LUMENS PER LAMP=1300
WATTS PER LAMP=15
BALLAST FACTOR=1
PHOTOMETRY TYPE=C

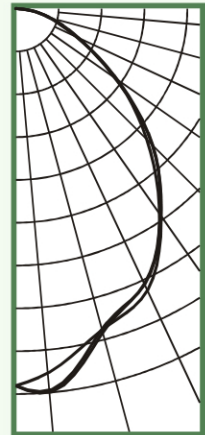

CANDLEPOWER

Angle	End	45	Cross
0	1774	1774	1774
5	1804	1722	1813
15	1562	1565	1578
25	1433	1463	1430
35	1186	1192	1178
45	908	911	869
55	569	580	580
65	324	318	314
75	170	165	162
85	47	49	52
90	4	3	3
95	0	0	0
105	0	0	0
115	0	0	0
125	0	0	0
135	0	0	0
145	0	0	0
155	0	0	0
165	0	0	0
175	0	0	0
180	0	0	0

ZONAL LUMEN SUMMARY

DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	1283	24.7	34.0
0-40	2028	39.0	53.7
0-60	3243	62.4	85.9
0-90	3776	72.6	100.0
90-120	1	0.0	0.0
90-150	1	0.0	0.0
90-180	1	0.0	0.0
0-180	3777	72.6	100.0

Luminaire Efficiency = 72.6%

SPACING CRITERION


ALONG	ACROSS
1.11	1.11

LED T8 - RECESSED



FHL320 SERIES - LED T8


CROSS SECTION

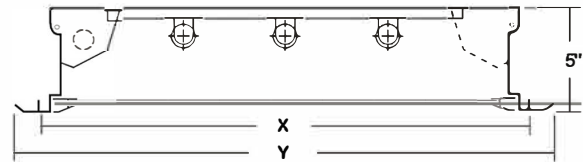

2X2-Ceiling Opening X - 24_1/2" x 24_1/2"
Overall Width By Length Y - 26" x 26"
2X4-Ceiling Opening X - 24_1/2" x 48_1/2"
Overall Width By Length Y - 26" x 50"


BACK PLATE

ACCESS PLATE 7/8" K.O. 3/8" K.O.

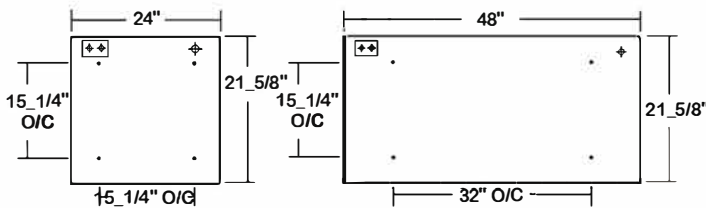

DOOR FRAME INFORMATION

CROSS SECTION



FS W

FINISHES

W - White Enamel
 B - Black Enamel
 N - Natural Anodized Aluminum

STYLES

FS - Flat Steel
 FA - Flat Extruded Aluminum
 RA - 5/8" Regressed Extruded Aluminum

CATALOG NUMBER

	NOMINAL WIDTH X LENGTH	TOTAL LAMPS
FHL320-1-2LI	2' X 2'	1
FHL320-1-2LR	2' X 2'	1
FHL320-1-2LO	2' X 2'	1
FHL320-2-2LI	2' X 2'	2
FHL320-2-2LR	2' X 2'	2
FHL320-2-2LO	2' X 2'	2
FHL320-3-2LI	2' X 2'	3
FHL320-3-2LR	2' X 2'	3
FHL320-3-2LO	2' X 2'	3
FHL320-4-2LI	2' X 2'	4
FHL320-4-2LR	2' X 2'	4
FHL320-4-2LO	2' X 2'	4
FHL320-2-4LI	2' X 4'	2
FHL320-2-4LR	2' X 4'	2
FHL320-2-4LO	2' X 4'	2
FHL320-3-4LI	2' X 4'	3
FHL320-3-4LR	2' X 4'	3
FHL320-3-4LO	2' X 4'	3
FHL320-4-4LI	2' X 4'	4
FHL320-4-4LR	2' X 4'	4
FHL320-4-4LO	2' X 4'	4
FHL320-5-4LI	2' X 4'	5
FHL320-5-4LR	2' X 4'	5
FHL320-5-4LO	2' X 4'	5
FHL320-6-4LI	2' X 4'	6
FHL320-6-4LR	2' X 4'	6
FHL320-6-4LO	2' X 4'	6

SAFETY SWITCH

TS2 - LED Luminaire On/Off Safety Switch

- Easily accessible on exterior of wire way.
- Allows individual fixture to be switched ON/OFF during re-lamping or Maintenance.
- Prevents damage to lamp and electrical shock during lamping and re-lamping.
- Allows safe entry to wire way channel where power connector can be disconnected for maintenance to fixture.




ORDERING GUIDE

SPECIFIED



EXAMPLE

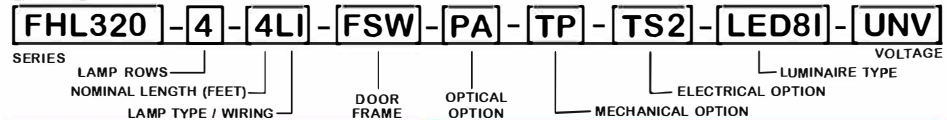

OPTIONS AND ACCESSORIES

OPTICAL OPTIONS

- Parabolic Plastic Louvers
- Polycarbonate Lenses
- High Impact Acrylic
- Flat White Matte Diffusers
- Clear Prismatic Acrylic
- Dropped Opal Pans

SUFFIX

- *
- *
- *
- FWA
- PA
- DP

MECHANICAL OPTIONS

- Tamper Proof Screws
- Gasketing

SUFFIX

- TP
- GSK

ELECTRICAL OPTIONS

- LED Luminaire ON/OFF Safety Switch

SUFFIX

- TS2

ACCESSORIES

- Hanger Yokes
- Swing Out Jack

CAT. NO.


- HS-24 1/2
- SOJ

*See Appropriate Reference Page

LAMP TYPE

LI = LED T8 internal driver light tube.

Both ends powered.
 Shunted sockets used.




LR = LED T8 internal driver light tube.

Single end powered.
 Non-shunted sockets used.



LO = LED T8 internal driver light tube.

Both ends powered, one wire connects lampholders together from each side.
 Non-shunted sockets used.



SPECIFICATIONS

- TYPE
- CONSTRUCTION
- FINISH
- DOOR FRAME
- OPTICS
- WIRING
- LABELS

A versatile recessed mounted flanged luminaire for LED T8 light tube (s)** with internal driver.
 22 ga. cold rolled steel housing. (20 ga. housing available as specified)
 Baked white polyester finish, minimum reflectance 86%. (Powder coated finish available.)
 20 gauge cold rolled steel or extruded aluminum in various finishes. T-hinge, positive spring loaded latch.
 Clear prismatic acrylic standard. Extensive variety of lenses, diffusers and louvers available.
 Operates T8 LED light tube(s)**.
 U.L Listed. Suitable for damp locations.

** Lamp(s) by others.

