




SPECIAL PURPOSE

GCR700 SERIES



Class 1000/10000 Clean Room

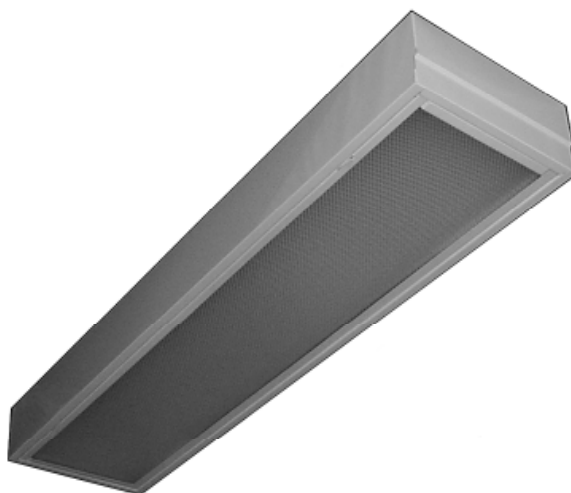

- Class 1000/10000 Clean Room Luminaire
- ISO Class 6 / ISO Class 7 Equivalent
- For 1" or 1_1/2" T-Bar Ceiling
- All Parts Are Fitted And Sealed
- Welded And Painted After Fabrication
- T-Hinge & Spring Loaded Latch
- Inverted Nominal .125 Clear Prismatic Acrylic Lens
- Suitable for Damp Locations
- Available with:
 - Fluorescent, LED and LED T8 (Internally Driven)
 - Variety of Lenses & Door Frame
 - Tamper Proof Screws
 - Emergency Battery Pack



Photometric Data and IES Files are Available on www.lalighting.com




LOS ANGELES LIGHTING MFG. CO.

10141 OLNEY ST. / EL MONTE, CA 91731


TEL : 626-454-8300 FAX : 626-454-8399

www.lalighting.com

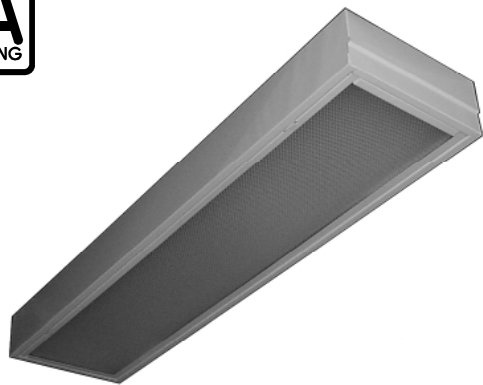


GCR700 SERIES

CROSS SECTION

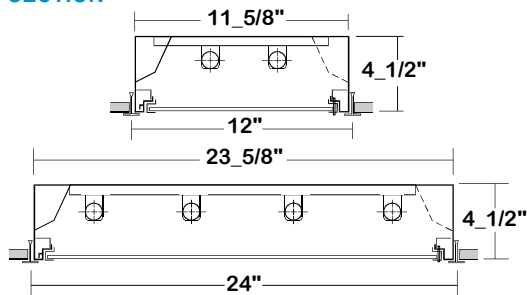


BACK PLATE

⌀ 7/8" K.O.

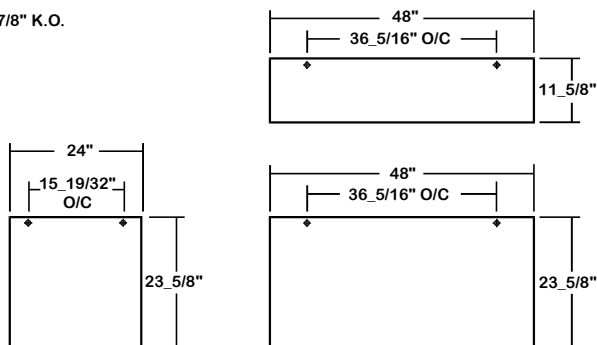

DOOR FRAME INFORMATION

CROSS SECTION



FINISHES

- W - White Enamel
- B - Black Enamel
- N - Natural Anodized Aluminum

STYLES

- FS - Flat Steel (W/ Internal Frame Rail. No gasket.)
- FA - Flat Extruded Aluminum
- RA - 5/8" Regressed Extruded Aluminum
- QFA - Flat Extruded Aluminum - Black Reveal
- QRA - 1/2" Regressed Extruded Aluminum - Black Reveal


EXPLANATION

1. Inverted Lens.
2. T-Hinge, Positive Spring Loaded Latch.
3. Sealed With Neoprene Gasket.
4. Light Stop Covers Installed.
5. Silicone Sealed Corners.
6. Internal Frame Rail.

CATALOG NUMBER

	NOMINAL WIDTH X LENGTH	TOTAL LAMPS		NOMINAL WIDTH X LENGTH	TOTAL LAMPS		NOMINAL WIDTH X LENGTH	TOTAL LAMPS
GCR710-2-4M	1' X 4'	2	GCR710-2-4R	1' X 4'	2	GCR720-4-2R	2' X 2'	4
GCR720-2-2M	2' X 2'	2	GCR720-2-2R	2' X 2'	2	GCR720-2-4R	2' X 4'	2
GCR720-2-4M	2' X 4'	2	GCR720-2-2RU1	2' X 2'	2	GCR720-3-4R	2' X 4'	3
GCR720-3-4M	2' X 4'	3	GCR720-2-2RU6	2' X 2'	2	GCR720-4-4R	2' X 4'	4
GCR720-4-4M	2' X 4'	4	GCR720-3-2R	2' X 2'	3			

ORDERING GUIDE

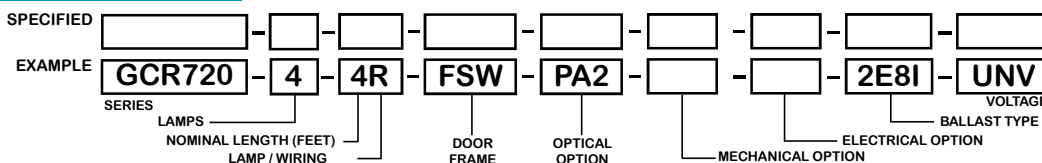

NOTE: LAMP/WIRING*
 M=Miniature Bi-Pin T5
 R=Medium Bi-Pin T8
 RU1= Medium Bi-Pin T8 U Shaped 1_5/8" Spacing
 RU6= Medium Bi-Pin T8 U Shaped 6" Spacing

OPTIONS AND ACCESSORIES

OPTICAL OPTIONS

- Polycarbonate Lenses
- High Impact Acrylic
- Clear Prismatic Acrylic Nom .125
- Flat White Matte Diffusers
- Dropped Opal Pans

SUFFIX
 *
 *
 PA2
 FWA
 DP

MECHANICAL OPTIONS

- Tamper Proof Screws (Hex Socket With Post)
- Emergency Battery Pack
- External Line Fusing (HLR/GLR)
- Radio Interference Filters
- Night Light

SUFFIX
 TP
 SUFFIX
 BP*
 ELF
 RIF
 NL*

BALLAST OPTIONS

- Electronic T5
- Electronic T5HO
- Electronic Step Dimming T5HO
- Electronic T8
- Electronic Step Dimming T8

SUFFIX
 E5*
 E5H
 ESDM5H
 E8*
 ESDM8*

*See appropriate reference page

SPECIFICATIONS

TYPE

Class 1000/10000 square sided clean room fixture, ISO Class 6/ ISO Class 7 equivalent. Applicable where a sealed ceiling situation exists. Compatible with inverted Tee-Bar Ceilings 1" or 1 1/2" width.

CONSTRUCTION

22 ga. cold rolled steel welded housing. All parts are fitted and sealed, no unused holes or KO's. Baked white powder coated finish, minimum reflectance 90%, painted after fabrication.

FINISH

20 gauge cold rolled steel. T-hinges and positive spring loaded latches. Door frame sealed with neoprene gasket.

DOOR FRAME

Inverted clear prismatic acrylic lens standard, nominal .125 overall thickness.

OPTICS

120v 60Hz., 277v 60Hz., UNV (universal voltage 120v thru 277v) or as otherwise specified.

WIRING

U.L. Listed. Suitable for damp locations. Compatible with UL Fire-Rated Ceiling Assemblies.



LABELS



PHOTOMETRIC DATA

GCR720-3-4R-FSW-PA-E8

TEST NO.=LA-T0491
 LAMP TYPE=FO32T8
 NO. OF LAMP=3
 LUMENS PER LAMP=2900
 WATTS PER LAMP=32
 BALLAST FACTOR=1
 PHOTOMETRY TYPE=C

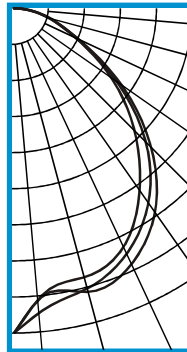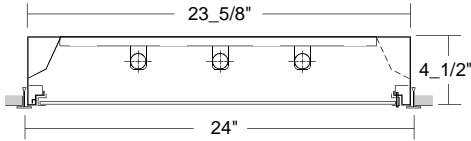

CANDLEPOWER

ANGLE	END	45	CROSS
0	2306	2306	2306
5	2067	2164	2070
15	1974	2054	2084
25	1858	1912	1993
35	1558	1669	1751
45	1206	1318	1371
55	830	878	918
65	469	488	486
75	247	247	262
85	68	77	73
90	7	5	8
95	0	0	0
105	0	0	0
115	0	0	0
125	0	0	0
135	0	0	0
145	0	0	0
155	0	0	0
165	0	0	0
175	0	0	0
180	0	0	0

ZONAL LUMEN SUMMARY

DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	1670	19.2	31.4
0-40	2714	31.2	51.0
0-60	4509	51.8	84.8
0-90	5316	61.1	100.0
90-120	2	0.0	0
90-150	2	0.0	0
90-180	2	0.0	0
0-180	5318	61.1	100.0

Lumen Output = 5318 lumens
 Luminaire Efficiency = 61.1%

SPACING CRITERION

ALONG	ACROSS
1.11	1.20

This space is intentionally left blank.

This space is intentionally left blank.

This space is intentionally left blank.

