



RECESSED

GIC110 SERIES



Direct / Indirect T-Bar Luminaire



- Center Basket Direct / Indirect Recessed Mounted T-Bar Luminaire
- Center Perforated Light Shields with Polyethylene Trims
- Easy Access to Electrical Components
- Removable Wiring Access Plate
- High Reflectance, Low Gloss Matte White Finish
- Suitable for Damp Locations
- Available with:
Fluorescent, LED and LED T8 (Internally Driven)

Photometric Data and IES Files are Available on www.lalighting.com




LOS ANGELES LIGHTING MFG. CO.
 10141 OLNEY ST. / EL MONTE, CA 91731
TEL : 626-454-8300 FAX : 626-454-8399
www.lalighting.com

RECESSED - LED T8 (Internally Driven)




**GIC110 SERIES - LED T8
Center Basket 1x4**

CROSS SECTION

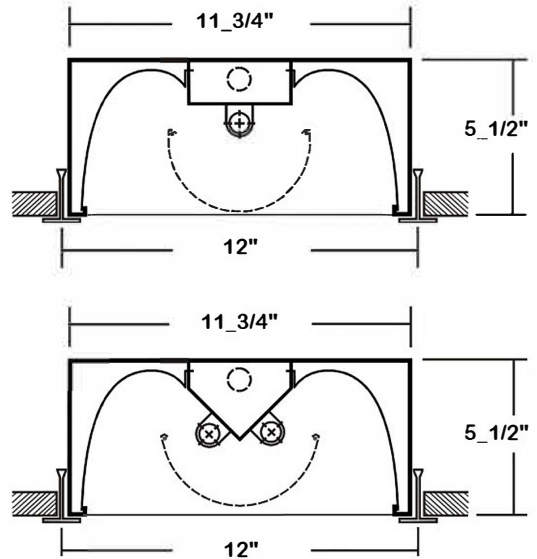

BACK PLATE

ACCESS PLATE 7/8" K.O.

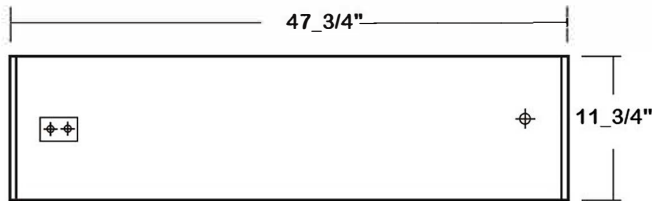

CATALOG NUMBER


	NOMINAL WIDTH X LENGTH	TOTAL MODULES
GIC110-1-4Lx	1' x 4'	1
GIC110-2-4Lx	1' x 4'	2

**TS2 - LED Luminaire
On/Off Safety Switch**



- Easily accessible on exterior of wire way.
- Allows individual fixture to be switched ON/OFF during re-lamping or Maintenance.
- Prevents damage to lamp and electrical shock during lamping and re-lamping.
- Allows safe entry to wire way channel where power connector can be disconnected for maintenance to fixture.

ORDERING GUIDE

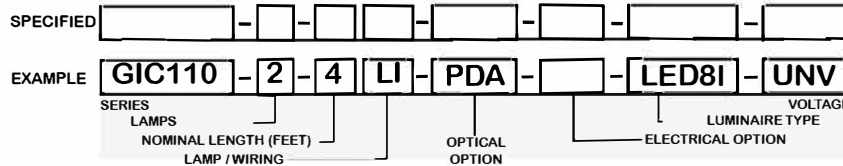

LAMP / WIRING

LI = LED T8 internal driver light tube.
Both ends powered.
Shunted sockets used.



LR = LED T8 internal driver light tube.
Single end powered.
Non-shunted sockets used.



OPTIONS AND ACCESSORIES

● **OPTICAL OPTIONS**
Perforated Shield / White Acrylic
SUFFIX PDA

● **ELECTRICAL OPTIONS**
LED Luminaire ON/OFF Safety Switch
SUFFIX TS2

SPECIFICATIONS

- **TYPE** Direct / indirect recessed mounted T-bar luminaires, for LED T8 internally driven light tube(s)**.
- **CONSTRUCTION** 22 ga. cold rolled steel housing. (20 ga. housing available as specified)
- **FINISH** Baked white polyester finish housing. (Powder coated finish available.)
- **OPTIC** Perforated center-mount metal light shield with polyethylene protecting trims, snap out for easy re-lamping and maintenance. White acrylic insert available.
- **WIRING** Operate LED T8 internally driven light tube(s)**.
- **LABELS** U.L. Listed. Suitable for damp locations.

** Lamp(s) by others.

