

# INDUSTRIAL

## **IND300 SERIES**



## 13½" Wide Reflector Industrial Luminaire





- 13½ " Wide Reflector Industrial Luminaire
- 22 Ga. Cold Rolled Steel Housing
- Baked White Polyester Finish
- Screw-On End Caps
- Reflector Secured by Quarter turn Fasteners
- Suitable for Damp Locations
- Available with:

Fluorescent, LED and LED T8 (Internally Driven)

**Up-Light** 

95% Enhanced Specular Aluminum Reflector

**Emergency Battery Pack** 

Switch

14 Ga. Wire Guard



Photometric Data and IES Files are Available on www.lalighting.com



## LOS ANGELES LIGHTING MFG. CO.

10141 OLNEY ST. / EL MONTE, CA 91731


TEL: 626-454-8300 FAX: 626-454-8399

www.lalighting.com

## INDUSTRIAL - LED T8 (Internally Driven)




## **IND300 SERIES - LED T8**

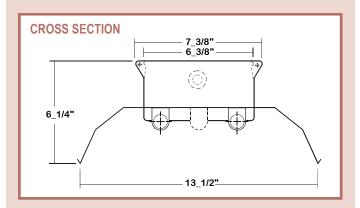

## **BACK PLATE**

- + 11/16" STEM MTG. K.O.
- ♦ 7/8" OFFSET K.O.
- 2" K.O.

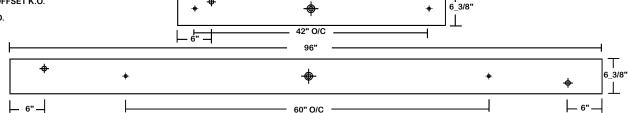

48'

## **CATALOG NUMBER**

IND300-2-4Lx	
IND300-2-8LxT	

IND300-3-4Lx

IND300-3-8LxT


#### NOMINAL TOTAL MODULES **LENGTH**

2

8' 4

4' 3 8' 6

## **ORDERING GUIDE**



## TS2 - LED Luminaire On/Off Safety Switch



- · Easily accessible on exterior of wire way.
- Allows individual fixture to be switched ON/OFF during re-lamping or Maintenance.
- Prevents damage to lamp and electrical shock during lamping and re-lamping.
- Allows safe entry to wire way channel where power connector can be disconnected for maintenance to fixture.

## LAMP / WIRING

LI = LED T8 internal driver light tube.

Both ends powered. Shunted sockets used.

### LR = LED T8 internal driver light tube.

Single end powered. Non-shunted sockets used.

### **OPTIONS AND ACCESSORIES**

MECHANICAL OPTIONS

Reflector End Enclosures

**SUFFIX** CE

• ELECTRICAL OPTIONS

LED Luminaire ON/OFF Safety Switch

SUFFIX TS2

 ACCESSORIES Wire Guard - 14 Ga.

12" Coupling For Row Mounting Channel Hangers 6" Leg Height V-Hook **Fixture Suspension System** 

CAT. NO. WG14-IND300 CMC-300 CH-300 V6

\*See appropriate reference page

## **SPECIFICATIONS**

CONSTRUCTION

• TYPE Industrial luminaire for surface or suspended mounting.

22 ga. cold rolled steel housing.(20 ga. housing available as specified.) End plates are fastened to housing by sheet metal screws to assure rigidity.

FINISH

Baked white polyester finish, minimum reflectance 86%.(Powder coated finish available.) 22 ga. cold rolled steel reflector standard.

REFLECTOR WIRING

Operate LED T8 internally driven light tube(s)\*\*.

LABELS Suitable for damp locations.



\*\* Lamp(s) by others.