



OPEN COMMERCIAL

STR400 SERIES 9" Wide Strip Luminaire



- 9" Wide Strip Luminaire
- 22 Ga. Cold Rolled Steel Housing
- Baked White Polyester Finish
- Screw-On End Caps
- Cover Secured by Two Quarter turn Fasteners
- Suitable for Damp Locations
- Available with:
 - Fluorescent, LED and LED T8 (Internally Driven)
 - Low Density
 - Emergency Battery Pack
 - Switch
 - 14 Ga. Wire Guard
 - 12" Coupling For Row Mounting



Photometric Data and IES Files are Available on www.lalighting.com



LOS ANGELES LIGHTING MFG. CO.

10141 OLNEY ST. / EL MONTE, CA 91731

TEL : 626-454-8300 FAX : 626-454-8399


www.lalighting.com

OPEN COMMERCIAL - LED T8 (Internally Driven)




STR400 SERIES - LED T8

CROSS SECTION

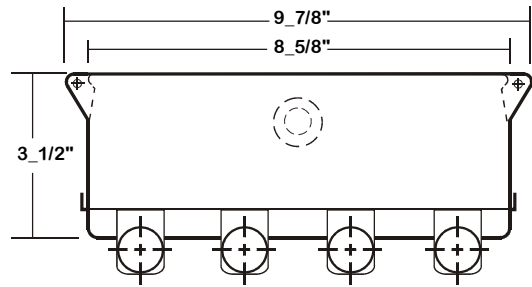

BACK PLATE


- ⊕ 11/16" STEM MTG. K.O.
- ⊕ 7/8" OFFSET K.O.
- ⊕ 2" K.O.

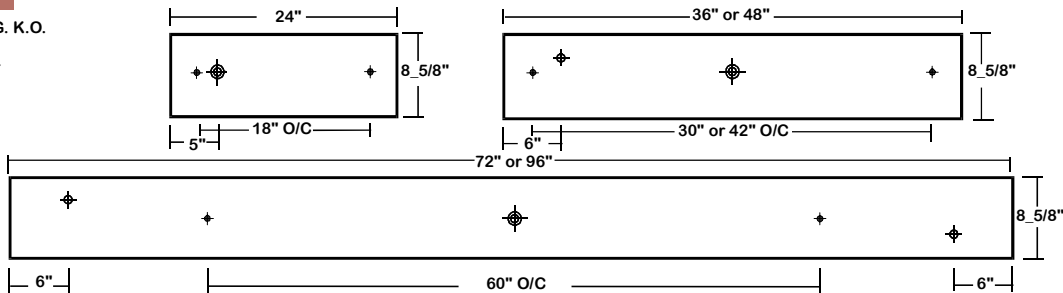

CATALOG NUMBER

	NOMINAL LENGTH	TOTAL MODULES		NOMINAL LENGTH	TOTAL MODULES
STR400-2-2Lx	2'	2	STR400-3-8LxT	8'	6
STR400-2-4Lx	4'	2	STR400-4-2Lx	2'	4
STR400-2-8LxT	8'	4	STR400-4-4Lx	4'	4
STR400-3-2Lx	2'	3	STR400-4-8LxT	8'	8
STR400-3-4Lx	4'	3			

ORDERING GUIDE

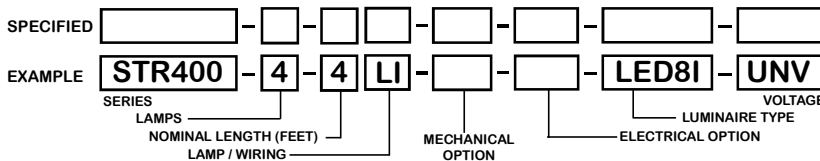

LAMP / WIRING

LI = LED T8 internal driver light tube.
Both ends powered.
Shunted sockets used.



LR = LED T8 internal driver light tube.
Single end powered.
Non-shunted sockets used.



OPTIONS AND ACCESSORIES

● ELECTRICAL OPTIONS

LED Luminaire ON/OFF Safety Switch

SUFFIX

TS2
*

● ACCESSORIES

Wire Guard - 14 Ga.
12" Coupling For Row Mounting
Channel Hangers
Fixture Suspension System

CAT. NO.

WG14-STR400
CMC-STR400
CH-400
*

*See appropriate reference page

SPECIFICATIONS

** Lamp(s) by others.

- TYPE
- CONSTRUCTION
- FINISH
- WIRE GUARD
- WIRING
- LABELS

Open commercial luminaire for installation in areas requiring a large concentration of light.
22 ga. cold rolled steel housing. (20 ga. housing available as specified.) End plates are fastened to housing by sheet metal screws to assure rigidity.
Baked white polyester finish, minimum reflectance 86%. (Powder coated finish available.)
14 ga. chrome epoxy powder coated.
Operate LED T8 internally driven light tube(s)**.
Suitable for damp locations.

