



WRAPAROUND

WPL200 SERIES



Fully Gasketed Enclosure Luminaire



- Fiberglass Housing and White Celcon Latches
- 22 Ga. Cold Rolled Steel Internal Housing
- Continuous Poured Gasket
- Clear Stippled Acrylic Deep Diffuser
- Suitable for Damp Locations
- IP Rating :
 - IP65 - Dust tight / Protected Against Water Jetting
 - IP67 - Dust tight / Temporary Submersion Under Water For 30 Minutes
- Available with :
 - Fluorescent, LED and LED T8 (Internally Driven)
 - Stainless Steel Mounting Brackets
 - Stainless Steel Latches
 - Tamper Proof Screws
 - Emergency Battery Pack
 - 14Ga. Wire Guard



Photometric Data and IES Files are Available on www.lalighting.com



LOS ANGELES LIGHTING MFG. CO.

10141 OLNEY ST. / EL MONTE, CA 91731



TEL : 626-454-8300 FAX : 626-454-8399

www.lalighting.com

PHOTOMETRIC DATA

WPL200-2-4R-CC-E8

TEST NO.=LA-T0427
 LAMP TYPE=F032T8
 NO. OF LAMP=2
 LUMENS PER LAMP=2900
 WATTS PER LAMP=32
 BALLAST FACTOR=1
 PHOTOMETRY TYPE=C

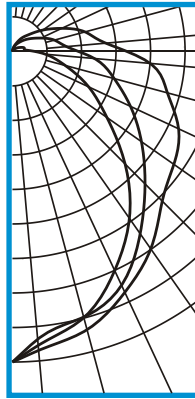

CANDLEPOWER

ANGLE	END	45	CROSS
0	1113	1113	1113
5	1057	1035	1075
15	988	986	1032
25	867	925	953
35	731	798	864
45	571	672	759
55	413	564	706
65	301	467	657
75	196	377	575
85	119	295	495
90	79	235	409
95	50	195	336
105	44	156	270
115	33	112	195
125	22	80	133
135	13	56	86
145	10	40	59
155	4	24	31
165	1	8	15
175	0	0	1
180	0	0	0

ZONAL LUMEN SUMMARY

DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	808	13.9	19.4
0-40	1309	22.6	31.4
0-60	2331	40.2	56.0
0-90	3515	60.6	84.4
90-120	501	8.6	12.0
90-150	635	11.0	15.3
90-180	647	11.2	15.6
0-180	4162	71.8	100.0

Lumen Output = 4162 lumens
 Luminaire Efficiency = 71.8%

SPACING CRITERION

ALONG	ACROSS
1.07	1.21

This space is intentionally left blank.

This space is intentionally left blank.

This space is intentionally left blank.

