



WALL BRACKET LED

BSQ100 (2FT) SERIES (4' AVAILABLE)

SQUARE WALL BRACKET LUMINAIRE

DATE	
JOB	


WWW.LALIGHTING.COM
626-454-8300

APPLICATIONS

COMMERCIAL



DIMENSIONS

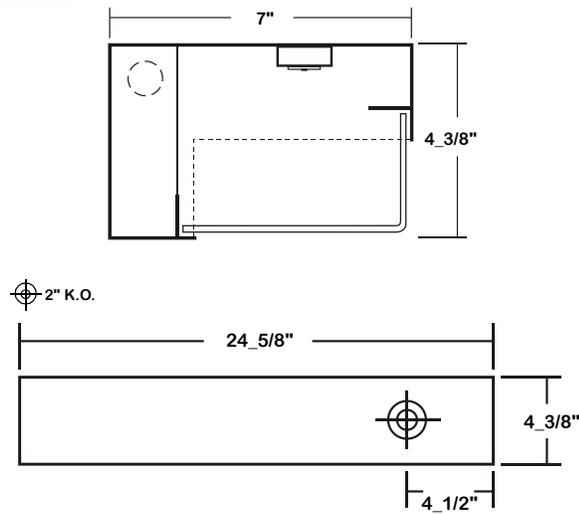

SPECIFICATIONS

FEATURES

- Wall mounted LED luminaire
- Provides front light and down light
- 0-10V dimming driver standard (other dimming types available)
- Controls and sensors available
- Wireless control options (Lutron, EnOcean, ZigBee, etc.)
- Supports California Title 24 compliance
- Suitable for damp locations
- Additional lumen packages and color temperatures available
- Full customization available upon request

CONSTRUCTION

- 22 ga. cold rolled steel welded housing
- 45-degree mounting bracket available
- Switch available

OPTICAL

- Clear prismatic acrylic lens
- Variety of lenses available

ELECTRICAL

- High efficiency drivers coupled with long-life LEDs
- Service life greater than 50,000 hours (L70)
- Universal voltage 120V through 277V (347V / 480V available)
- Emergency battery pack available

FINISH

- Baked white powder coated finish
- Minimum reflectance 90%
- Painted after fabrication
- Custom colors available

CUSTOM COLORS

BLK - Matte Black

CS - Camaro Silver

BZ - Statuary Bronze

Variety of RAL colors & Axalta/DuPont colors available upon request.

CERTIFICATIONS



ORDERING INFORMATION

EXAMPLE: BSQ100-2-2L-PA-BPL-1DRDM-UNV-1/840

SERIES	LED LUMEN PACKAGE	NOMINAL LENGTH	OPTICAL	ELECTRICAL	DRIVER	VOLTAGE	# OF LED ROW	CRI / CCT
BSQ100		2L				UNV	1	
BSQ100 Square Wall Bracket LED Luminaire	2 Nom. 2000 Lumens 3 Nom. 3000 Lumens 4 Nom. 4000 Lumens <i>*Additional Lumen Packages Available</i>	2L 2'	PA Clear Prismatic Acrylic FPA Frosted Prismatic Acrylic	BPL Emergency Battery Pack <i>*Leave Blank if Not Specified</i> <i>Additional Electrical Options</i>	1DRDM 0-10V One Dimming Driver <i>Additional Driver Options</i>	UNV 120V-277V <i>*Additional Voltages Available</i>	1 One LED Row	835 80+CRI / 3500K Color Temp. 840 80+CRI / 4000K Color Temp. 850 80+CRI / 5000K Color Temp. <i>*Additional Color Temp. Available</i>



Los Angeles Lighting Mfg. Co.

Headquarters
10141 Olney Street
El Monte, CA 91731
Made in the USA

Contact Us
T: 626-454-8300
F: 626-454-8399
www.lalighting.com

Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

Revised 08-15-17

SYSTEM DATA

NOMINAL SIZE	LED LUMEN PACKAGE	OPTICAL	CRI / CCT	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	FLUORESCENT EQUIVALENT	IES FILES
2'	2000 lm	PA	840	1642 lm	17.4 W	94.3 lm/W	2-F17T8, 1-F24T5HO	*
	3000 lm	PA		2454 lm	26.2 W	93.6 lm/W	3-F17T8	*
	4000 lm	PA		3288 lm	34.4 W	95.7 lm/W	4-F17T8, 2-F24T5HO	*

NOTE:

System data above is based on 120V input voltage.

Actual performance may differ as a result of end-user environment and application.

This fixture has been tested and listed in accordance with UL Standards. L.A. Lighting certifies that it will operate safely when installed properly, and within an ambient temperature range from -20°C to 40°C.


Additional lumen packages and color temperatures available.

ACCESSORIES

45MB

- 45-Degree Mounting Bracket
- Designed for mounting lighting fixtures at 45° angle
- Ideal for wall or ceiling mount applications
- 18 ga. electro galvanized steel
- Baked white powder coated finish

Note: Must drill own holes for 45-Degree Mounting Bracket.



CEILING MOUNT



WALL MOUNT



Los Angeles Lighting Mfg. Co.

Headquarters
10141 Olney Street
El Monte, CA 91731
Made in the USA

Contact Us
T: 626-454-8300
F: 626-454-8399
www.lalighting.com

Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.