



# WRAPAROUND

## WHO200 (8FT) SERIES (4' AVAILABLE)

HIGH IMPACT WRAPAROUND LUMINAIRE




DATE	
JOB	

WWW.LALIGHTING.COM  
626-454-8300

### APPLICATIONS

COMMERCIAL, CLASSROOM

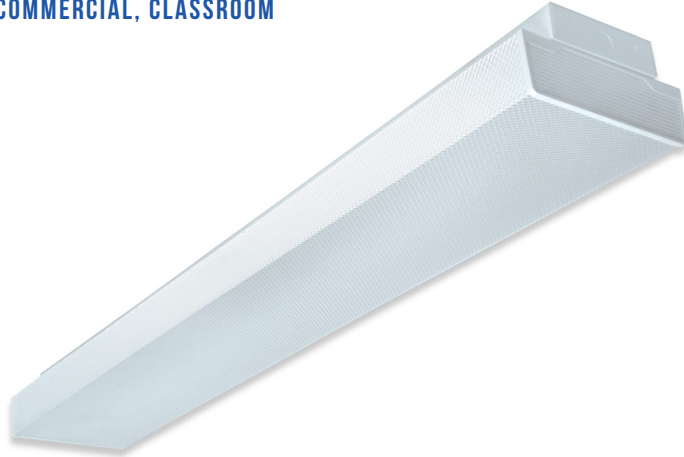

### SPECIFICATIONS

#### FEATURES

- Surface / suspension mounted LED luminaire
- 0-10V dimming driver standard (other dimming types available)
- Controls and sensors available
- Wireless control options (Lutron, EnOcean, ZigBee, etc.)
- Supports California Title 24 compliance
- Suitable for damp locations
- Additional lumen packages and color temperatures available
- Full customization available upon request

#### CONSTRUCTION

- 22 ga. cold rolled steel welded housing
- Canopy suspension system available

#### OPTICAL

- High impact clear prismatic acrylic lens (minimum 0.125 thickness)
- Lens secured by spring loaded barrel latches



#### ELECTRICAL

- High efficiency drivers coupled with long-life LEDs
- Service life tested at 148,000 hours (L70), 42,000 (L90)
- Universal voltage 120V through 277V (347V / 480V available)
- Emergency battery pack available

#### FINISH

- Baked white powder coated finish
- Painted after fabrication
- Minimum reflectance 90%

### DIMENSIONS

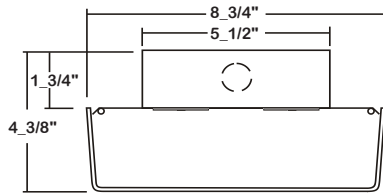

± 11/16" STEM MTG. K.O.  
± 7/8" OFFSET K.O.  
± 2" K.O.

### ORDERING INFORMATION

EXAMPLE: WHO200-6-8L-DRP3-BPL1.5-DRDM-UNV-2/840

SERIES	LED LUMEN PACKAGE	NOMINAL LENGTH	OPTICAL	ELECTRICAL	DRIVER	VOLTAGE	# OF LED ROW	CRI / CCT
<b>WHO200</b>		<b>8L</b>				<b>UNV</b>	<b>2</b>	
<b>WHO200</b> High Impact Wraparound LED Luminaire	<b>6</b> Nom. 6000 Lumens <b>8</b> Nom. 8000 Lumens <b>12</b> Nom. 12000 Lumens <b>16</b> Nom. 16000 Lumens <i>*Additional Lumen Packages Available</i>	<b>8L</b> 8'	<b>DRP3</b> High Impact Clear Prismatic Acrylic Min. 0.125 Thickness	<b>BPL1.5</b> Emergency Battery Pack  <b>MS</b> Motion Sensor  <b>SDxx</b> Step Dimming Control  *Leave Blank if Not Specified  <i>Additional Motion Sensor Options</i> <i>Additional Electrical Options</i>	<b>DRDM</b> 0-10V Dimming Driver  <i>Additional Driver Options</i>	<b>UNV</b> 120V-277V  <i>*Additional Voltages Available</i>	<b>2</b> Two LED Rows	<b>835</b> 80+CRI / 3500K Color Temp.  <b>840</b> 80+CRI / 4000K Color Temp.  <b>850</b> 80+CRI / 5000K Color Temp.  <i>*Additional Color Temp. Available</i>



**Los Angeles Lighting Mfg. Co.**  
Contact Us  
T: 626-454-8300  
F: 626-454-8399  
www.lalighting.com  
10141 Olney Street  
El Monte, CA 91731  
Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2022 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 08/15/17




SYSTEM DATA

NOMINAL SIZE	LED LUMEN PACKAGE	OPTICAL OPTION	CRI / CCT	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	FLUORESCENT EQUIVALENT	IES FILES
8'	6000 lm **	DRP3	840	6028 lm	42.7 W	141.3 lm/W	3-F32T8	*
	8000 lm **	DRP3		8185 lm	59.8 W	136.9 lm/W	4-F32T8, 2-F54T5HO	*
	12000 lm *	DRP3		11050 lm	88.8 W	124.4 lm/W	6-F32T8	*

PERFORMANCE DATA

[VIEW LIGHTING FACTS](#)

ACCESSORIES



**433B**

- Blank canopy with cable
- No power cord
- Cable length 48" and 96"
- Max. weight 196 lbs. per set


**433B - 48 W**

**COLOR**

- W** White Standard
- B** Black

**CABLE LENGTH**

48" and 96" Standard  
(other lengths as specified)



**444F**

- Feed-in canopy with straight cord
- Includes power cord
- Cable length 48" and 96"
- Max. weight 196 lbs. per set

**444F-48SW-2C**

**# OF CIRCUIT**

- 2C** Two Circuits
- LV** 0-10V Dimming
- Leave blank for one circuit*

**COLOR**

- W** White Standard
- B** Black

**CORD TYPE**

- S** Straight Cord

**CABLE LENGTH**

48" and 96" Standard  
(other lengths as specified)



**Los Angeles Lighting Mfg. Co.**  
 Contact Us  
 T: 626-454-8300 10141 Olney Street  
 F: 626-454-8399 El Monte, CA 91731  
 www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2022 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 08/15/17

