



# CLEAN ROOM LED

## GCR721 (2X4) SERIES (2X2 AVAILABLE)

CLASS 1000/10000 CLEAN ROOM GRID LUMINAIRE

DATE	
JOB	



WWW.LALIGHTING.COM  
626-454-8300

### CLASS 1000/10000 RECESSED MOUNTED LED LUMINAIRE FOR 1" OR 1\_1/2" WIDE INVERTED T-BAR CEILINGS

### DIMENSIONS

T-BAR SIZING

WIDTH	HEIGHT
15/16"	1_1/2"
1_1/2"	1_1/2"
1_1/2"	2"

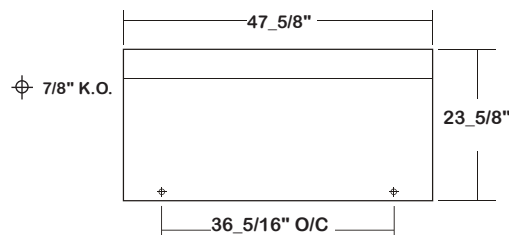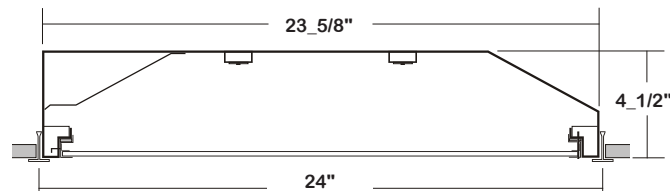

### APPLICATIONS

- Class 1000/10000 Clean Room, Sealed Ceiling Areas, Commercial

### FEATURES

- Class 1000/10000 / ISO Class 6 equivalent / ISO Class 7 equivalent
- 0-10V dimming driver standard (See *DRIVER OPTIONS* for other dimming types)
- Supports California Title 24 compliance

### OPTIONS

- Full customization available upon request
- Additional lumen packages and color temperatures available
- Controls and sensors available (See *SENSOR OPTIONS* for controls and sensors)
- Wireless control options available (See *SENSOR OPTIONS* for wireless controls)
- Variety of lenses available (See *OPTICAL OPTIONS* for lenses)
- Emergency battery pack available (See *BATTERY PACK OPTIONS* for battery pack options)
- Antimicrobial finished housing and door frame available
- Tamper proof screws available

### SPECIFICATIONS

#### CONSTRUCTION

- 22 ga. cold rolled steel welded housing
- All parts fitted and sealed
- 20 ga. cold rolled steel door frame secured by T-hinges and positive spring loaded latches
- Door frame sealed with neoprene gasket

#### FINISH

- Baked white powder coated finish / welded and painted after fabrication / minimum reflectance 90%

#### OPTICAL

- Inverted clear prismatic acrylic lens (nominal 0.125) standard

#### ELECTRICAL

- High efficiency drivers coupled with long-life LEDs
- Service life tested at 50,000-51,000 hours (L70)
- Universal voltage 120V through 277V (347V / 480V available)
- Power Factor (PF) ≥ 0.9
- Total Harmonic Distortion (THD) ≤ 20%

#### LISTING

- UL USA and Canada listed / suitable for damp locations

#### WARRANTY

- 5-year limited warranty



**Los Angeles Lighting Mfg. Co.**  
Headquarters  
10141 Olney Street  
El Monte, CA 91731  
Made in the USA

Contact Us  
T: 626-454-8300  
F: 626-454-8399  
www.lalighting.com



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

**MADE IN THE U.S.A.**

Revised 10-01-18

**ORDERING INFORMATION**

**EXAMPLE:** GCR721-4-4L-FSW-PA2-TP-BPL10-1DRDM-UNV-2/840

SERIES	LED LUMEN PACKAGE	EFFICACY	NOMINAL LENGTH	FINISH	DOOR FRAME	OPTICAL	MECHANICAL	ELECTRICAL	DRIVER	VOLTAGE	# OF LED ROW	CRI / CCT
<b>GCR721</b>			<b>4L</b>						<b>1DRDM</b>	<b>UNV</b>	<b>2</b>	
<b>GCR721</b> Class 1000 / 10000 Clean Room Grid LED Luminaire	2 Nom. 2000 Lumens 4 Nom. 4000 Lumens 6 Nom. 6000 Lumens 8 Nom. 8000 Lumens 12 Nom. 12000 Lumens  *Additional Lumen Packages Available	(Blank) Standard  HE High Efficacy	4L 2' x 4'	AMF Antimicrobial Finished Housing and Door Frame  *Leave Blank if Not Specified	FSW Flat Steel White Enamel Door Frame  See DOOR FRAME for Options	PA2 Clear Prismatic Acrylic 0.125 Nominal  FPA2 Frosted Prismatic Acrylic 0.125 Nominal  See OPTICAL OPTIONS for Options	TP Tamper Proof Screws (Hex Socket with Post)  *Leave Blank if Not Specified  Additional Mechanical Options	BPL10 Emergency Battery Pack, Constant 10W Nom. 1500 lm  See BATTERY PACK OPTIONS for Options  WLC(LED RU) EnOcean Wireless Control  See SENSOR OPTIONS for Options  *Leave Blank if Not Specified  Additional Electrical Options	1DRDM 0-10V One Dimming Driver  See DRIVER OPTIONS for Options	UNV 120V-277V  See DRIVER OPTIONS for Options	2 Two LED Rows	830 80+CRI / 3000K Color Temp.  835 80+CRI / 3500K Color Temp.  840 80+CRI / 4000K Color Temp.  850 80+CRI / 5000K Color Temp.  *Additional Color Temp. Available

**SYSTEM DATA**

**THESE ARE THE MOST POPULAR LUMEN PACKAGES. PLEASE CONSULT FACTORY FOR ADDITIONAL SYSTEM DATA.**

LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
2000 Lumens (Nominal)	GCR721-2-4L-FSW-PA2-1DRDM-UNV-2/840	1820 lm	15.2 W	119.8 lm/W	-20°C / 35°C	1-F32T8	*
4000 Lumens (Nominal)	GCR721-4-4L-FSW-PA2-1DRDM-UNV-2/840	3561 lm	31.4 W	113.2 lm/W	-20°C / 35°C	2-F32T8, 1-F54T5HO	*
6000 Lumens (Nominal)	GCR721-6-4L-FSW-PA2-1DRDM-UNV-2/840 *	5752 lm	47.5 W	121.09 lm/W	-20°C / 35°C	3-F32T8	<a href="#">LA-T3340-1</a>
8000 Lumens (Nominal)	GCR721-8-4L-FSW-PA2-1DRDM-UNV-2/840	6802 lm	64.8 W	105 lm/W	-20°C / 35°C	4-F32T8, 2-F54T5HO	<a href="#">LA-T3099-2</a>
12000 Lumens (Nominal)	GCR721-12-4L-FSW-PA2-1DRDM-UNV-2/840	9724 lm	104.6 W	92.9 lm/W	-20°C / 35°C	6-F32T8	*

LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE (HIGH EFFICACY) PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
2000 Lumens (Nominal)	GCR721-2HE-4L-FSW-PA2-1DRDM-UNV-2/840	1669 lm	12.6 W	132.9 lm/W	-20°C / 35°C	1-F32T8	*
4000 Lumens (Nominal)	GCR721-4HE-4L-FSW-PA2-1DRDM-UNV-2/840	3378 lm	25.4 W	133.0 lm/W	-20°C / 35°C	2-F32T8, 1-F54T5HO	*
6000 Lumens (Nominal)	GCR721-6HE-4L-FSW-PA2-1DRDM-UNV-2/840	5063 lm	38.5 W	131.5 lm/W	-20°C / 35°C	3-F32T8	*
8000 Lumens (Nominal)	GCR721-8HE-4L-FSW-PA2-1DRDM-UNV-2/840	6724 lm	51.8 W	127.9 lm/W	-20°C / 35°C	4-F32T8, 2-F54T5HO	*
12000 Lumens (Nominal)	GCR721-12HE-4L-FSW-PA2-1DRDM-UNV-2/840	9975 lm	79.3 W	125.8 lm/W	-20°C / 35°C	6-F32T8	*

**NOTE:**

System data is based on 120V input voltage. DLC system data\* based on DLC testing parameters. Actual performance may differ as a result of end-user environment and application.

This fixture has been tested and listed in accordance with UL Standards. L.A. Lighting certifies that it will operate safely when installed properly, and within an ambient temperature range noted in the system data table.



Additional lumen packages and color temperatures available. Due to constant updates on this product, please visit the [DLC QPL Website](#) for the most accurate system data and information.

**PERFORMANCE DATA**

[VIEW LIGHTING FACTS](#)

[VIEW PHOTOMETRICS](#)



**Los Angeles Lighting Mfg. Co.**  
Headquarters  
10141 Olney Street  
El Monte, CA 91731  
Made in the USA  
  
Contact Us  
T: 626-454-8300  
F: 626-454-8399  
www.lalighting.com



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

**MADE IN THE U.S.A.**

**SENSOR OPTIONS**



**CONTROLS AND SENSORS**

**WLC(LED RU) - EnOcean® LED Relay Zone Controller**

- Supports a single LED fixture or multiple daisy chained LED fixtures
- Module installed inside lighting fixture

**ESRPU-W-EO - EnOcean® Rocker Switch – Single – Surface Mount**

- Wireless single rocker switch with mounting plate
- No batteries needed

**EDRPU-W-EO - EnOcean® Rocker Switch – Double – Surface Mount**

- Wireless double rocker switch with mounting plate
- No batteries needed

**S3054-N300 - EnOcean® Navigan NWC 300U – Commissioning Tool**

- Navigan Wireless Commissioner is used to configure EnOcean controllers & sensors
- It can be used to define link tables, change parameters/settings, and to edit & store projects
- Configuration settings can be saved and cloned to enable quick configuration
- Connectivity is through the NWC 300U USB Stick

**EOSWU-W-EO - EnOcean® Occupancy Sensor – Wall Mount**

- Wireless wall mounted occupancy sensor
- Solar powered - no batteries needed (coin battery operated in low light conditions)
- PIR motion sensor with both wide angle (50') and long range (100') options
- Mounting height: 6-8 feet

**EOSCU-W-EO - EnOcean® Occupancy Sensor – Ceiling Mount**

- Wireless ceiling mounted occupancy sensor
- Solar powered - no batteries needed (coin battery operated in low light conditions)
- PIR motion sensor with 360 degree viewing angle lens (34' diameter)
- Mounting height: 7-10 feet

**ELLSU-W-EO - EnOcean® Light Level Sensor – Ceiling Mount**



- Light Level sensor that measures and reports the level of available natural light
- Solar powered - no batteries needed (coin battery operated in low light conditions)
- Enables implementation of daylight harvesting control systems
- Mounting position: At the ceiling, close to ambient light source

**DRIVER OPTIONS**

PLEASE CONSULT FACTORY TO SEE IF YOUR SELECTED DRIVER OPTION WORKS WITH THIS FIXTURE.

**BATTERY PACK OPTIONS**

PLEASE CONSULT FACTORY TO SEE IF YOUR SELECTED BATTERY PACK OPTION WORKS WITH THIS FIXTURE.

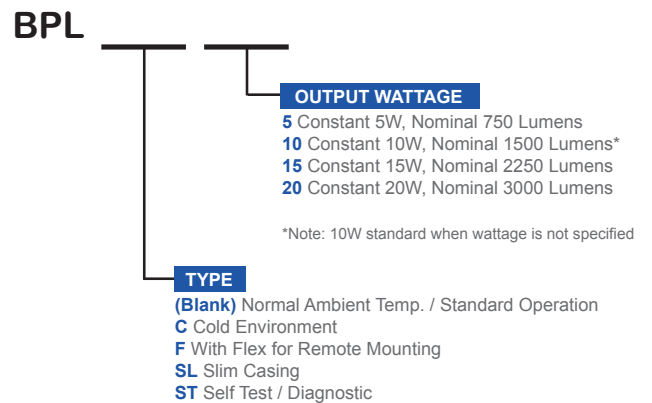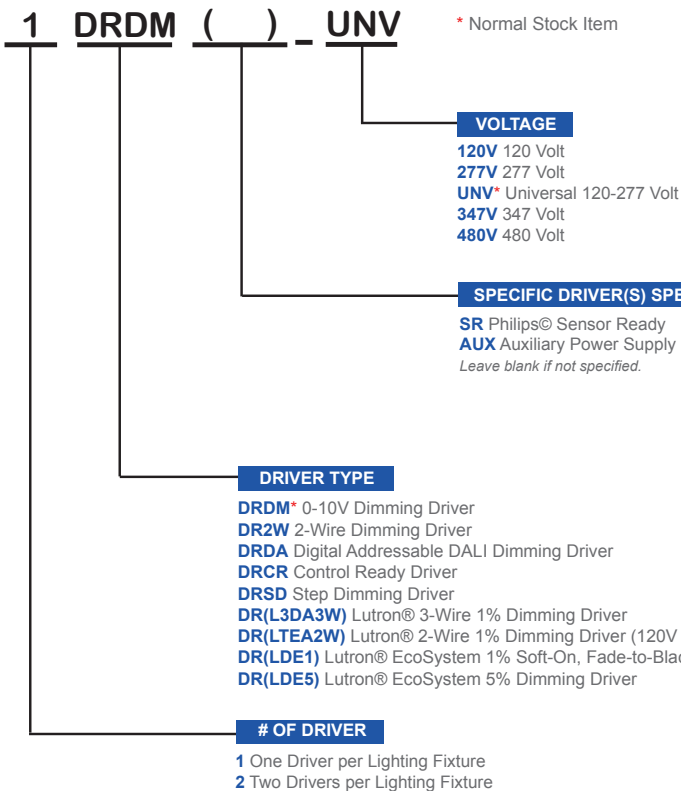

**Los Angeles Lighting Mfg. Co.**  
 Headquarters  
 10141 Olney Street  
 El Monte, CA 91731  
 Made in the USA

Contact Us  
 T: 626-454-8300  
 F: 626-454-8399  
 www.lalighting.com



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

**MADE IN THE U.S.A.**

**OPTICAL OPTIONS**


**STANDARD LENSES FOR GCR721**

<b>PA2</b>	Clear Prismatic Acrylic, Nom. 0.125 OA Thickness, Female Prisms 3/16 Square Base
<b>FPA2</b>	Frosted Prismatic Acrylic, Nom. 0.125 OA Thickness

[CLICK HERE FOR FULL OPTICAL OPTIONS LIST](#)

**DOOR FRAME**

**CROSS SECTION**

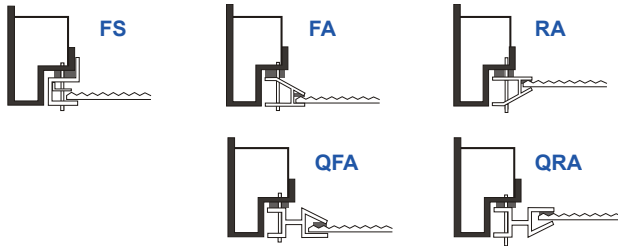

**FEATURES**

- Inverted Lens
- T-Hinges and Positive Spring Loaded Latches
- Neoprene Gasket Between Door Frame and Housing
- Light Stop Covers Installed
- Internal Frame Rail

**FS W**

**FINISHES**

- W** White Enamel
- B** Black Enamel
- N** Natural Anodized Aluminum  
(Only FA / RA / QFA / QRA styles)

**STYLES**

- FS** Flat Steel (with internal frame rail)
- FA** Flat Extruded Aluminum
- RA** 5/8" Regressed Extruded Aluminum
- QFA** Flat Extruded Aluminum-Black Reveal
- QRA** 1/2" Regressed Extruded Aluminum-Black Reveal



**Los Angeles Lighting Mfg. Co.**  
 Headquarters  
 10141 Olney Street  
 El Monte, CA 91731  
 Made in the USA

Contact Us  
 T: 626-454-8300  
 F: 626-454-8399  
 www.lalighting.com



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

**MADE IN THE U.S.A.**

## LED lighting facts

GCR721-6-4L-PA2-1DRDM-UNV-2/840

- 6000 Lumen System
- L70 performance at 51,000 hours



Los Angeles Lighting Mfg. Co.

**LED lighting facts**

Light Output (Lumens)	5752
Watts	47.5
Lumens per Watt (Efficacy)	121.09

Color Accuracy Color Rendering Index (CRI)	86
---	----

**Light Color**  
Correlated Color Temperature (CCT) **4080 (Bright White)**

Warm White	Bright White	Daylight
2700K	3000K	4500K
		6500K

Warranty**	Yes
------------	-----

All results, except LED Lumen Maintenance, are according to IESNA LM-79-2008:  
Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.

\*\* See [www.lightingfacts.com/products](http://www.lightingfacts.com/products) for details.

Registration Number: -POA2ZG (5/22/2018)  
Model Number: GCR721-6-4L-XXX-XXX-PA2-XX-XXXXX-1DRDM(XXX)-UNV-2/840  
Type: Luminaire - Troffer/Grid Ceiling





**LOS ANGELES LIGHTING MFG. CO.** 10141 OLNEY ST. / EL MONTE, CA 91731

TEL 626-454-8300 | FAX 626-454-8399 | [www.lalighting.com](http://www.lalighting.com)

**PHOTOMETRIC DATA - GCR721 SERIES**

**GCR721-8-4L-FSW-PA2-1DRDM-UNV-2/840**

TEST NO.= LA-T3099-2  
 LED TYPE=48 LED MODULE  
 NO. OF MODULE=4  
 SYSTEM WATT (W)=64.8  
 CRI ≥ 80  
 L70(Hrs.) ≥ 50,000  
 PHOTOMETRY TYPE=C

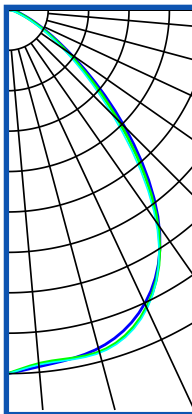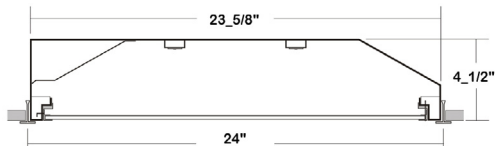

**CANDLEPOWER**

ANGLE	END	45	CROSS
0	3619	3619	3619
5	3563	3532	3545
15	3486	3522	3534
25	3225	3265	3280
35	2627	2605	2573
45	1645	1556	1471
55	763	711	666
65	307	274	244
75	126	101	73
85	73	45	11
90	30	14	2
95	18	10	2
105	23	10	1
115	23	10	2
125	20	10	2
135	16	8	2
145	10	7	1
155	6	7	0
165	7	4	0
175	1	0	0
180	0	0	0

**ZONAL LUMEN SUMMARY**

DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	2844	33.2	41.8
0-40	4479	52.3	65.8
0-60	6324	73.8	93
0-90	6743	78.7	99.1
90-120	35.5	0.4	0.5
90-150	55	0.7	0.8
90-180	59	0.7	0.9
0-180	6802	79.4	100

Luminaire Output= 6802 lm  
 Luminaire Efficacy = 105 lm/W

**SPACING CRITERION**

ALONG	ACROSS
1.19	1.19

This Space is intentionally left blank.

This Space is intentionally left blank.

This Space is intentionally left blank.



**LOS ANGELES LIGHTING MFG. CO.**

10141 OLNEY ST. / EL MONTE, CA 91731

TEL 626-454-8300 | FAX 626-454-8399

| [www.lalighting.com](http://www.lalighting.com)