



# WRAPAROUND DES210

® SOFT CONTOUR DECORATIVE LUMINAIRE



JOB


TYPE

DATE


## SURFACE / STEM / PENDANT MOUNTED



CROSS SECTION

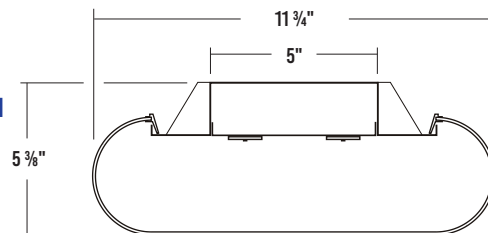

BACKPLATE

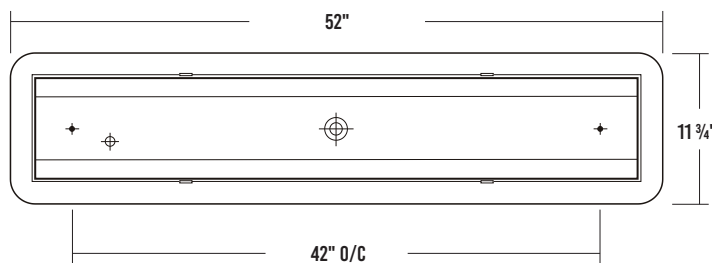

✦ 11/16" STEM MTG. K.O.    ⊕ 7/8" OFFSET K.O.    ⊕ 2" K.O.

## SPECIFICATIONS

### Construction

- 22 gauge cold-rolled steel housing (20 gauge also available)

### Finish

- Baked white polyester finish (powder coated finish available)
- Minimum reflectance 86%

### Optical

- Fully illuminated one-piece dropped white acrylic opal diffuser
- Diffuser clips to luminaire housing and can be removed from either side

### Electrical

- High-efficiency drivers coupled with long-life LEDs
- Service life greater than 50,000 hours (L70)
- Universal voltage 120V through 277V (347 / 480V available)
- Emergency battery pack available

### Listing

- UL USA and Canada listed / suitable for damp locations

### Warranty

- 5-Year limited warranty standard. 10-Year limited warranty also available

## APPLICATIONS

- Commercial, Retail, Office, Residential

## FEATURES

- Surface/stem/pendant mounted LED luminaire
- 0-10V dimming driver standard (other dimming types available)
- Controls and sensors available
- Supports California Title 24 compliance
- Suitable for damp locations
- Additional lumen packages and color temperatures available
- Full customization available upon request

## OPTIONS

- Tunable white (2700K – 6500K)
- Emergency battery pack
- 20 gauge housing
- Customization available upon request



Los Angeles Lighting Mfg. Co.

Contact Us

T: 626-454-8300

F: 626-454-8399

www.lalighting.com

10141 Olney Street

El Monte, CA 91731

Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2024 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.



MADE IN THE USA  
BAA Compliant

Revised: 05/07/24

**ORDERING INFORMATION:** Additional Options Available. Visit [www.lalighting.com/resources](http://www.lalighting.com/resources) for more information

**EXAMPLE: DES210-4-4L-CLO-BPL1.5-DRDM-UNV-2/840**

SERIES	NOMINAL LED LUMENS	NOMINAL LENGTH	OPTICAL	ELECTRICAL	DRIVER	VOLTAGE	# OF LED ROWS	CRI / CCT
<b>DES210</b>		<b>4L</b>	<b>CLO</b>		<b>DRDM</b>	<b>UNV</b>	<b>2</b>	
<b>DES210</b> • Soft Contour Decorative Luminaire	2 - 2000lm 4 - 4000lm 6 - 6000lm 8 - 8000lm	4L • 4'	<b>CLO</b> • Dropped white acrylic opal diffuser	<b>BPL1.5</b> • 1500 lm emergency battery pack  <b>MSH</b> • Microwave Motion Sensor - On/Off  <b>MSHSD</b> • Microwave Motion Sensor - High/Low  <b>WLC(LED RU)</b> • EnOcean® LED Relay Zone Controller  *Leave blank if not specified	<b>DRDM</b> • 0-10V Dimming Driver	<b>UNV</b> • 120V-277V  <b>120V</b> • 120 Volt  <b>277V</b> • 277 Volt	<b>2</b> • Two LED Rows	<b>827</b> • 80+CRI / 2700K  <b>830</b> • 80+CRI / 3500K  <b>835</b> • 80+CRI / 3500K  <b>840</b> • 80+CRI / 4000K  <b>850</b> • 80+CRI / 5000K  <b>865</b> • 80+CRI / 6500K  <b>8TW</b> • 80+CRI Tunable White 2700K-6500K  90CRI Also available
Standard options for DES210 shown above. For additional options, including lumen packages, controls, lenses, switches, finishes, and more, visit <a href="http://www.lalighting.com/resources">www.lalighting.com/resources</a> or contact customer service.								Contact customer service for additional CRI/CCT packages, including 90 CRI

## SENSORS AND CONTROLS

### HIGH FREQUENCY (MICROWAVE) MOTION SENSORS

Detects movement through low density materials, including polycarbonate, acrylic and glass diffusers.

#### MSH - Microwave Motion Sensor – On/Off

- Turns luminaire on/off in response to motion

#### MSHSD - Microwave Motion Sensor – High/Low

- Increases/decreases illumination in response to motion

## WIRELESS CONTROLS

#### WLC(LED RU) - EnOcean® LED Relay Zone Controller

- Pre-installed inside luminaire
- Can support a single luminaire or multiple daisy-chained luminaires

For additional sensor and wireless controls options, visit [www.lalighting.com/resources](http://www.lalighting.com/resources)



**Los Angeles Lighting Mfg. Co.**  
 Contact Us  
 T: 626-454-8300  
 F: 626-454-8399  
[www.lalighting.com](http://www.lalighting.com)  
 10141 Olney Street  
 El Monte, CA 91731  
 Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2023 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.



Revised: 05/07/24



## MOUNTING OPTIONS

## CANOPY / CABLE SUSPENSION SYSTEM

- Self-locking, one-step adjustable suspension device with canopies
- Provides full 360° rotation

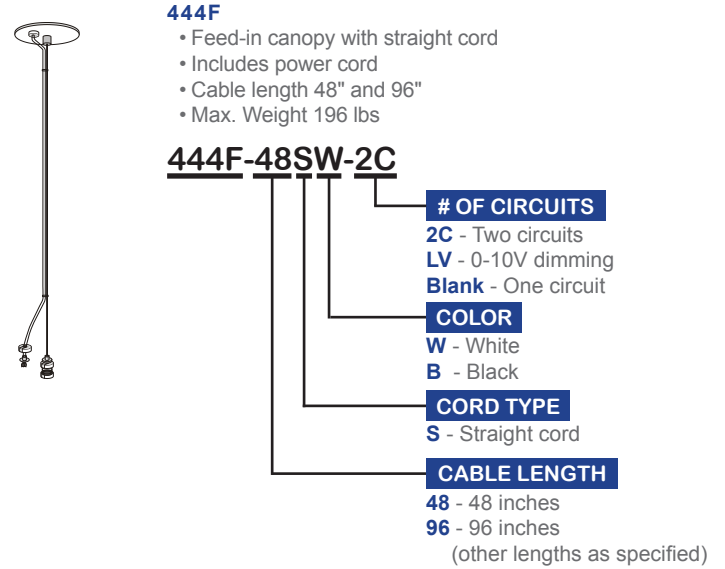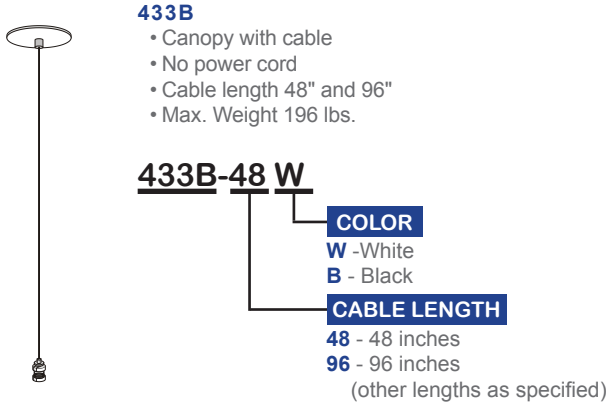

## SYSTEM DATA: Additional Lumen Packages Available. Contact Customer Service for More Information

Normal Ambient Temperature	4' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
	2000 Lumens (Nominal)	DES210-2-4L-DRDM-UNV-2/840	1980	17	116.5 lm/W	-20°C / 35°C (-4°F / 95°F)	1-F32T8	*
	4000 Lumens (Nominal)	DES210-4-4L-DRDM-UNV-2/840	3776	33.1	114.1 lm/W	-20°C / 35°C (-4°F / 95°F)	2-F32T8, 1-F54T5HO	*
	6000 Lumens (Nominal)	DES210-6-4L-DRDM-UNV-2/840	5314	52.3	101.6 lm/W	-20°C / 35°C (-4°F / 95°F)	3-F32T8	*
	8000 Lumens (Nominal)	DES210-8-4L-DRDM-UNV-2/840	7097	67.4	105.3 lm/W	-20°C / 35°C (-4°F / 95°F)	2-F54T5HO, 4-F32T8	*

**NOTE:**  
 System data as of 9/8/23.  
 Subject to change without notice.

System data is based on 120V input voltage. Actual performance may differ as a result of end-user environment and application. This fixture has been tested and listed in accordance with UL Standards. L.A. Lighting certifies that it will operate safely when installed properly, and within an ambient temperature range noted in the system data table.

Additional lumen packages and color temperatures available.



**Los Angeles Lighting Mfg. Co.**  
 Contact Us  
 T: 626-454-8300  
 F: 626-454-8399  
 www.lalighting.com  
 10141 Olney Street  
 El Monte, CA 91731  
 Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2023 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 05/07/24

