



SECURITY

FSE120 SERIES



2X4, Trim Flange Security Luminaire



- 2X4, Trim Flange Security Luminaire
- Welded and Painted After Fabrication
- Full Length Piano Hinge and Captive Tamper Proof Screws
- Nominal .187 High Impact Clear Prismatic Acrylic Lens
- One Way Polyurethane Gasketed
- Suitable for Damp Locations
- Available with:
 - Fluorescent, LED and LED T8 (Internally Driven)
 - Variety of Lens
 - Low Density
 - Emergency Battery Pack



Photometric Data and IES Files are Available on www.lalighting.com



LOS ANGELES LIGHTING MFG. CO.

10141 OLNEY ST. / EL MONTE, CA 91731


TEL : 626-454-8300 FAX : 626-454-8399

www.lalighting.com



FSE120 SERIES 2x4


CROSS SECTION

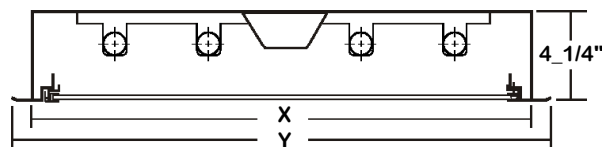

Ceiling Opening X - 24_1/2" x 48_1/4"
Overall Width By Length Y - 26" x 50"


BACK PLATE

- 3/8" K.O.
- 11/16" STEM MTG. K.O.
- 7/8" OFFSET K.O.
- 2" K.O.

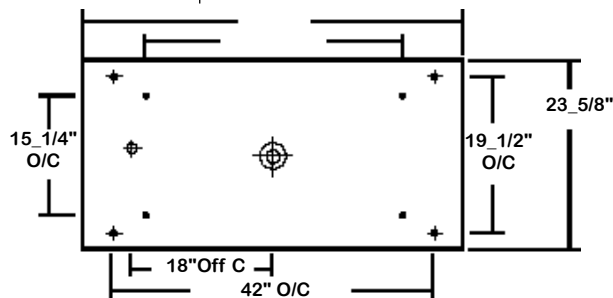


DOOR FRAME INFORMATION

CROSS SECTION

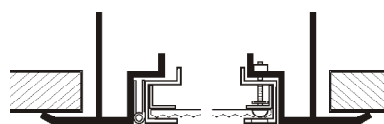

EXPLANATION

1. Continuous Piano Hinge.
2. Two Captive Tamper Proof Screws (Hex Socket With Post).
3. Inner Frame Lens Retainer Rail.




CATALOG NUMBER

	NOMINAL WIDTH X LENGTH	TOTAL LAMPS
FSE120-2-4M	2' X 4'	2
FSE120-3-4M	2' X 4'	3
FSE120-4-4M	2' X 4'	4

	NOMINAL WIDTH X LENGTH	TOTAL LAMPS
FSE120-2-4R	2' X 4'	2
FSE120-3-4R	2' X 4'	3
FSE120-4-4R	2' X 4'	4

ORDERING GUIDE

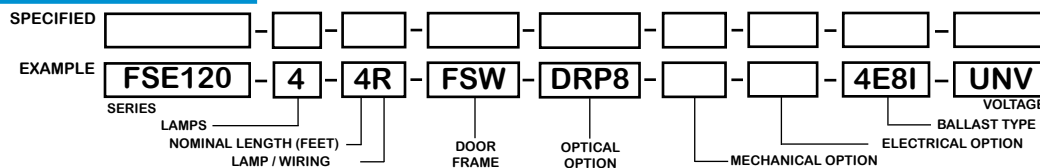

NOTE: LAMP/WIRING*
M = Miniature Bi-Pin T5
R = Medium Bi-Pin T8

OPTIONS AND ACCESSORIES

OPTICAL OPTIONS

- High Impact Clear Prismatic Acrylic .187
- High Impact Clear Prismatic Acrylic .125
- Clear Prismatic Polycarbonate .125

* Other Lens Available Upon Request

MECHANICAL OPTIONS

- Gasketing
- Low Density

SUFFIX

- DRP8
- DRP2
- PPC2

SUFFIX

- GSK*
- LD

ELECTRICAL OPTIONS

- Emergency Battery Pack
- External Line Fusing (HLR/GLR)
- Radio Interference Filters
- Night Light

SUFFIX

- BP*
- ELF
- RIF
- NL*

BALLAST OPTIONS

- Electronic T5
- Electronic T5HO
- Electronic Step Dimming T5HO
- Electronic T8
- Electronic Step Dimming T8

ACCESSORIES

- Hanger Yokes

SUFFIX

- E5*
- E5H
- ESDM5H
- E8*
- ESDM8*

CAT. NO.
HS-24_1/2

*See appropriate reference page

SPECIFICATIONS

- TYPE
- CONSTRUCTION
- FINISH
- DOOR FRAME
- GASKET
- OPTICS
- WIRING
- LABELS


Recessed trim flanged 24" wide security luminaire. Design for use in public areas where vandalism may be a problem.
20 gauge cold rolled steel welded housing.
Baked white powder coated finish, minimum reflectance 90%, painted after fabrication.
20 gauge cold rolled steel. Full length piano hinge and 2 captive tamper proof screws (hex socket with post).
Inner frame lens retainer rail.
One way polyurethane gasketed standard. More options available.
.187 high impact clear prismatic acrylic standard.
120v 60Hz., 277v 60Hz., UNV (universal voltage 120v thru 277v.) or as otherwise specified.
U.L. Listed. Suitable for damp locations. Compatible with UL Fire-Rated Ceiling Assemblies.




PHOTOMETRIC DATA

FSE120-4-4R-FSW-DRP8-E8

TEST NO.=LA-T0457-2
 LAMP TYPE=FO32T8
 NO. OF LAMP=4
 LUMENS PER LAMP=2900
 WATTS PER LAMP=32
 BALLAST FACTOR=1
 PHOTOMETRY TYPE=C



Ceiling Opening X - 24_1/2" x 48_1/4"
 Overall Width By Length Y - 26" x 50"

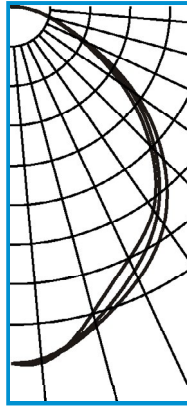

CANDLEPOWER

ANGLE	END	45	CROSS
0	2937	2937	2937
5	2940	2907	2917
15	2597	2675	2710
25	2286	2394	2470
35	2028	2085	2179
45	1607	1664	1756
55	1094	1179	1233
65	612	652	664
75	312	323	321
85	95	99	100
90	9	8	12
95	0	0	0
105	0	0	0
115	0	0	0
125	0	0	0
135	0	0	0
145	0	0	0
155	0	0	0
165	0	0	0
175	0	0	0
180	0	0	0

ZONAL LUMEN SUMMARY

DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	2138	18.4	31.2
0-40	3454	29.8	50.3
0-60	5800	50.0	84.5
0-90	6861	59.1	100.0
90-120	2	0.0	0
90-150	2	0.0	0
90-180	2	0.0	0
0-180	6863	59.2	100.0

Lumen Output = 6863 lumens
 Luminaire Efficiency = 59.2%

SPACING CRITERION

ALONG	ACROSS
1.10	1.18

This space is intentionally left blank.

This space is intentionally left blank.

This space is intentionally left blank.

