



RECESSED

GHL315 SERIES



5" Depth / Premium Grade T-Bar



- 20" x 2', 5" Depth / Premium Grade T-Bar Luminaire
- 22 Gauge Cold Rolled Steel Housing
- 20 Gauge Steel or Extruded Aluminum Door Frame Screwed at Each Corner
- Door Frame Painted After Fabrication
- One Way Polyurethane Gasketed
- T-Hinge And Spring Loaded Latch
- Screwed-On End Caps
- Suitable for Damp Locations
- Available with:

Fluorescent, LED and LED T8 (Internally Driven)

Variety of Lens Options

Emergency Battery Pack



Photometric Data and IES Files are Available on www.lalighting.com



LOS ANGELES LIGHTING MFG. CO.

10141 OLNEY ST. / EL MONTE, CA 91731

TEL : 626-454-8300 FAX : 626-454-8399

www.lalighting.com


RECESSED - Fluorescent

LED Equivalent Products Available on www.lalighting.com




GHL315 SERIES
2' Fixture, Nominal 20" Width

CROSS SECTION

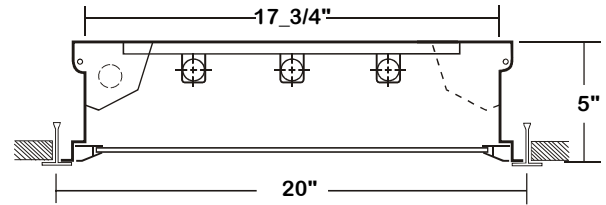


BACK PLATE

ACCESS PLATE \varnothing 7/8" K.O.

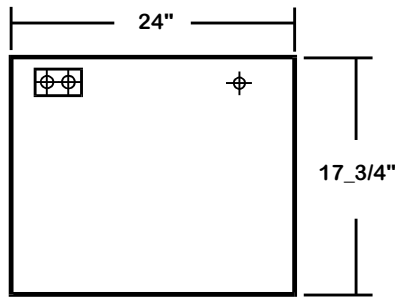

DOOR FRAME INFORMATION

● **CROSS SECTION**



FS W

FINISHES

- W - White Enamel
- B - Black Enamel
- N - Natural Anodized Aluminum


STYLES

- FS - Flat Steel
- FA - Flat Extruded Aluminum
- RA - 5/8" Regressed Extruded Aluminum

CATALOG NUMBER

	NOMINAL LENGTH	TOTAL LAMPS		NOMINAL LENGTH	TOTAL LAMPS
GHL315-2-2M	2'	2		GHL315-2-2R	2
GHL315-3-2M	2'	3		GHL315-3-2R	3
GHL315-4-2M	2'	4		GHL315-4-2R	4

ORDERING GUIDE

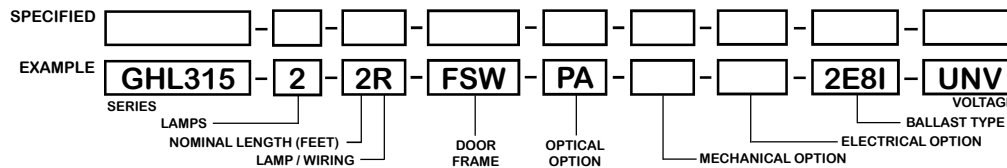

NOTE: LAMP/WIRING*

- M= Miniature Bi-Pin T5
- R = Medium Bi-Pin T8

OPTIONS AND ACCESSORIES

● **OPTICAL OPTIONS**

- Clear Acrylic
- Clear Prismatic Acrylic
- Flat Frosted White Acrylic
- Polycarbonate Lenses
- High Impact Acrylic
- Note: Other lens available upon request

SUFFIX

- CA
- PA
- FFWA
- *
- *

● **MECHANICAL OPTIONS**

- Gasketing
- ELECTRICAL OPTIONS**
- Emergency Battery Pack
- External Line Fusing (HLR/GLR)
- Radio Interference Filters
- Night Light

SUFFIX

- GSK*
- BP*
- ELF
- RIF
- NL*

● **BALLAST OPTIONS**

- Electronic T5
- Electronic T5HO
- Electronic Step Dimming T5HO
- Electronic T8
- Electronic Step Dimming T8

SUFFIX

- E5*
- E5H
- ESDM5H
- E8*
- ESDM8*

*See appropriate reference page

SPECIFICATIONS

- **TYPE**
- **CONSTRUCTION**
- **FINISH**
- **DOOR FRAME**
- **GASKET**
- **OPTICS**
- **WIRING**
- **LABELS**



A versatile recessed luminaire, for mounting in inverted Tee-Bar installations 20" x 24" on center.
 22 ga. cold rolled steel housing. (20 ga. housing available as specified)
 Baked white polyester finish, minimum reflectance 86%. (Powder coated finish available.)
 20 gauge cold rolled steel or extruded aluminum in various finishes. T-hinge, positive spring loaded latch.
 One way polyurethane gasketed standard. More options available.
 Clear prismatic acrylic standard. Extensive variety of lenses, diffusers and louvers available.
 120v 60Hz., 277v 60Hz., UNV (universal voltage 120v thru 277v.) or as otherwise specified.
 U.L. Listed. Suitable for damp locations. Compatible with UL Fire-Rated Ceiling Assemblies.



PHOTOMETRIC DATA

GHL315-2-2R-PA-E8

TEST NO.=LA-T0569
 LAMP TYPE=FO17T8
 NO. OF LAMP=2
 LUMENS PER LAMP=1350
 WATTS PER LAMP=17
 BALLAST FACTOR=1
 PHOTOMETRY TYPE=C

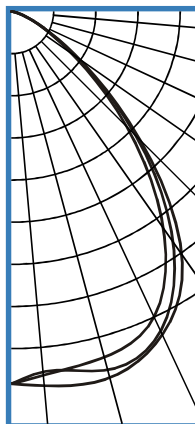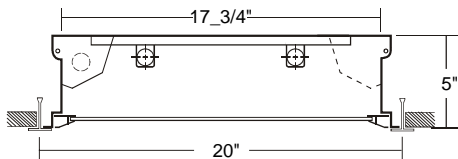

CANDLEPOWER

ANGLE	END	45	CROSS
0	879	879	879
5	862	854	887
15	845	876	895
25	796	833	842
35	624	664	700
45	384	415	430
55	175	186	195
65	68	67	70
75	17	19	21
85	3	3	3
90	0	0	0
95	0	0	0
105	0	0	0
115	0	0	0
125	0	0	0
135	0	0	0
145	0	0	0
155	0	0	0
165	0	0	0
175	0	0	0
180	0	0	0

ZONAL LUMEN SUMMARY

DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	712	26.4	41.8
0-40	1129	41.8	66.3
0-60	1614	59.8	94.7
0-90	1704	63.1	100.0
90-120	0	0.0	0
90-150	0	0.0	0
90-180	0	0.0	0
0-180	1704	63.1	100.0

Lumen Output = 1704 lumens
 Luminaire Efficiency = 63.1%

SPACING CRITERION

ALONG	ACROSS
1.19	1.27

This space is intentionally left blank.

This space is intentionally left blank.

This space is intentionally left blank.

