



# STRIP LIGHT

## STW200 (4FT) SERIES (8' AVAILABLE)

LED

STRIP WRAPAROUND LUMINAIRE

DATE	
JOB	


WWW.LALIGHTING.COM  
626-454-8300

### APPLICATIONS


COMMERCIAL, INDUSTRIAL, OFFICE,  
CORRIDOR, STAIRWELL,  
PARKING STRUCTURE



### DIMENSIONS

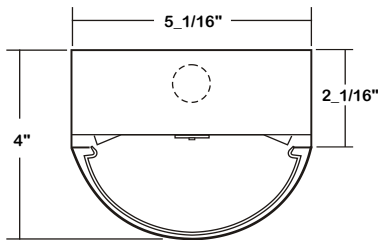

• 3/16" MTG. HOLE    ✦ 11/16" STEM MTG. K.O.    ⊕ 7/8" K.O.    ⊕ 2" K.O.    ● V-HOOK

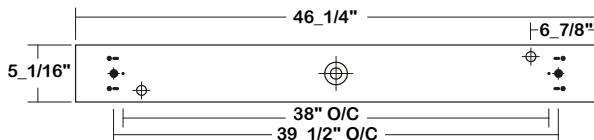

### SPECIFICATIONS

#### FEATURES

- Surface / suspension mounted LED luminaire with diffuser
- 0-10V dimming driver standard (other dimming types available)
- Controls and sensors available
- Wireless control options (Lutron, EnOcean, ZigBee, etc.)
- Supports California Title 24 compliance
- Suitable for damp locations
- Additional lumen packages and color temperatures available
- Full customization available upon request

#### CONSTRUCTION

- 22 ga. cold rolled steel housing
- End plates fastened to housing by rivets to assure rigidity
- Chain mount coupling available
- 45-degree mounting bracket available
- Canopy suspension system available

#### OPTICAL

- Frosted white acrylic lens

#### ELECTRICAL

- High efficiency drivers coupled with long-life LEDs
- Service life greater than 50,000 hours (L70)
- Universal voltage 120V through 277V (347V / 480V available)
- Emergency battery pack available

#### FINISH

- Baked white polyester finish
- Minimum reflectance 86%
- End plates - baked white powder coated finish / painted after fabrication
- Custom colors available

### CUSTOM COLORS

BLK - Matte Black

CS - Camaro Silver

BZ - Statuary Bronze

Variety of RAL colors & Axalta/DuPont colors available upon request.

### CERTIFICATIONS



### ORDERING INFORMATION

EXAMPLE: STW200-4-4L-BPL-1DRDM-UNV-1/840

SERIES	LED LUMEN PACKAGE	NOMINAL LENGTH	ELECTRICAL	DRIVER	VOLTAGE	# OF LED ROW	CRI / CCT
<b>STW200</b>		<b>4L</b>			<b>UNV</b>	<b>1</b>	
<b>STW200</b> Strip Wraparound LED Luminaire	<b>2</b> Nom. 2000 Lumens <b>4</b> Nom. 4000 Lumens <b>6</b> Nom. 6000 Lumens <b>8</b> Nom. 8000 Lumens <i>*Additional Lumen Packages Available</i>	<b>4L</b> 4'	<b>BPL</b> Emergency Battery Pack  <b>MS</b> Motion Sensor  <b>SDxx</b> Step Dimming Control  *Leave Blank if Not Specified  <i>Additional Motion Sensor Options</i>  <i>Additional Electrical Options</i>	<b>1DRDM</b> 0-10V One Dimming Driver  <i>Additional Driver Options</i>	<b>UNV</b> 120V-277V  <i>*Additional Voltages Available</i>	<b>1</b> One LED Row	<b>835</b> 80+CRI / 3500K Color Temp.  <b>840</b> 80+CRI / 4000K Color Temp.  <b>850</b> 80+CRI / 5000K Color Temp.  <i>*Additional Color Temp. Available</i>



Los Angeles Lighting Mfg. Co.

Headquarters  
10141 Olney Street  
El Monte, CA 91731  
Made in the USA

Contact Us  
T: 626-454-8300  
F: 626-454-8399  
www.lalighting.com

Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

Revised 08-01-17

SYSTEM DATA

NOMINAL SIZE	LED LUMEN PACKAGE	CRI / CCT	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	FLUORESCENT EQUIVALENT	IES FILES
4'	2000 lm	840	1646 lm	16.6 W	99.2 lm/W	1-F32T8	*
	4000 lm	840	3116 lm	34.7 W	89.8 lm/W	2-F32T8, 1-F54T5HO	*
	6000 lm	930	4592 lm	67.1 W	68.4 lm/W	3-F32T8	*
	8000 lm	840	6241 lm	68.6 W	90.1 lm/W	4-F32T8, 2-F54T5HO	*

**NOTE:**  
 System data above is based on 120V input voltage.  
 Actual performance may differ as a result of end-user environment and application.  
 This fixture has been tested and listed in accordance with UL Standards. L.A. Lighting certifies that it will operate safely when installed properly, and within an ambient temperature range from -20°C to 40°C.

Additional lumen packages and color temperatures available.

ACCESSORIES

V4


- 4" Leg Height V-Hook
- Two (2) per fixture



CMC-XXW200


- Chain mount coupling with Lift-Up tabs for installation of V-Hooks when chain mounted
- Baked white enamel finish

\*CMC is not suitable for 4' fixture with Battery Pack




YTCS10

- Y-Toggle-End / Cable Suspension System

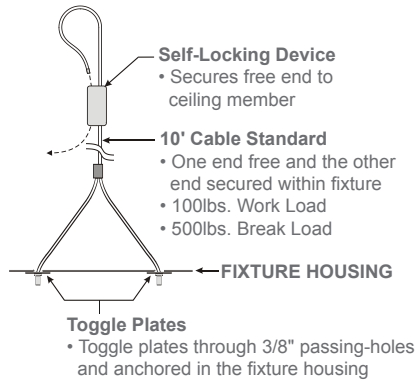

V4CS10


- V-Hook / Cable Suspension System
- Cable set with V4 hooks

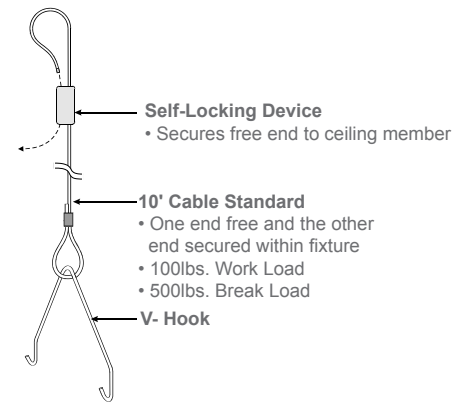

45MB

- 45-Degree Mounting Bracket
- Designed for mounting lighting fixtures at 45° angle
- Ideal for wall or ceiling mount applications
- 18 ga. electro galvanized steel
- Baked white powder coated finish

Note: Must drill own holes for 45-Degree Mounting Bracket.



433B

- Blank Canopy with Cable
- No Power Cord
- Cable Length 48" and 96"
- Max. Weight 196 lbs. Per Set



433B-48 W

- COLOR**  
 W White Standard  
 B Black
- CABLE LENGTH**  
 48" and 96" Standard  
 (Other Lengths As Specified)

444F

- Feed-In Canopy with Straight Cord
- Includes Power Cord
- Cable Length 48" and 96"
- Max. Weight 196 lbs. Per Set



444F-48SW-2C

- # OF CIRCUIT**  
 2C Two Circuits  
 LV 0-10V Dimming  
 Leave blank for one circuit
- COLOR**  
 W White Standard  
 B Black
- CORD TYPE**  
 S Straight Cord
- CABLE LENGTH**  
 48" and 96" Standard  
 (Other Lengths As Specified)



Los Angeles Lighting Mfg. Co.

Headquarters  
 10141 Olney Street  
 El Monte, CA 91731  
 Made in the USA

Contact Us  
 T: 626-454-8300  
 F: 626-454-8399  
 www.lalighting.com

Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.