



WRAPAROUND LED

WAN113 (4FT) SERIES (8' AVAILABLE)

13" SHALLOW WIDTH WRAPAROUND LUMINAIRE

DATE	
JOB	


WWW.LALIGHTING.COM
626-454-8300

APPLICATIONS


COMMERCIAL, CORRIDOR,
SERVICE ROOM



DIMENSIONS



- V-HOOK
- + 11/16" STEM MTG. K.O.
- ⊕ 7/8" OFFSET K.O.
- ⊕ 2" K.O.

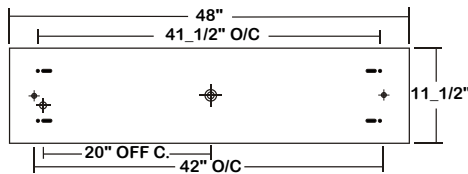

SPECIFICATIONS

FEATURES

- Surface / suspension mounted LED luminaire
- Row mountable
- 0-10V dimming driver standard (other dimming types available)
- Controls and sensors available
- Wireless control options (Lutron, EnOcean, ZigBee, etc.)
- Supports California Title 24 compliance
- Suitable for damp locations
- Additional lumen packages and color temperatures available
- Full customization available upon request

CONSTRUCTION

- 22 ga. cold rolled steel housing (20 ga. housing available as specified)
- Screwed-on end plates
- 45-degree mounting bracket available

OPTICAL

- Frosted prismatic acrylic lens with linear side prisms (two 4' lenses per 8' fixture)
- Extruded lens with hinges from either side

ELECTRICAL

- High efficiency drivers coupled with long-life LEDs
- Service life greater than 50,000 hours (L70)
- Universal voltage 120V through 277V (347V / 480V available)
- Cord and plug available
- Emergency battery pack available

FINISH

- Baked white polyester finish
- Minimum reflectance 86%
- End plates - powder coated finish / painted after fabrication

CERTIFICATIONS



ORDERING INFORMATION

EXAMPLE: WAN113-4-4L-FPA-BPL-1DRDM-UNV-2/840

SERIES	LED LUMEN PACKAGE	NOMINAL LENGTH	OPTICAL	ELECTRICAL	DRIVER	VOLTAGE	# OF LED ROW	CRI / CCT
WAN113		4L	FPA			UNV	2	
WAN113 13" Shallow Width Wraparound LED Luminaire	2 Nom. 2000 Lumens 4 Nom. 4000 Lumens 6 Nom. 6000 Lumens 8 Nom. 8000 Lumens <i>*Additional Lumen Packages Available</i>	4L 4'	FPA Frosted Prismatic Acrylic	BPL Emergency Battery Pack MS Motion Sensor <small>*Leave Blank if Not Specified</small> <i>Additional Motion Sensor Options</i> <i>Additional Electrical Options</i>	1DRDM 0-10V One Dimming Driver <i>Additional Driver Options</i>	UNV 120V-277V <small>*Additional Voltages Available</small>	2 Two LED Rows	835 80+CRI / 3500K Color Temp. 840 80+CRI / 4000K Color Temp. 850 80+CRI / 5000K Color Temp. <small>*Additional Color Temp. Available</small>



Los Angeles Lighting Mfg. Co.

Headquarters
10141 Olney Street
El Monte, CA 91731
Made in the USA

Contact Us
T: 626-454-8300
F: 626-454-8399
www.lalighting.com

Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

SYSTEM DATA

NOMINAL SIZE	LED LUMEN PACKAGE	OPTICAL OPTION	CRI / CCT	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	FLUORESCENT / HID EQUIVALENT	IES FILES
4'	2000 lm	FPA	840	1763.6 lm	15.53 W	113.56 lm/W	1-F32T8	*
			835	3371 lm	33 W	102.2 lm/W	2-F32T8, 1-F54T5HO	*
	4000 lm	FPA	840	3359 lm	33.06 W	101.6 lm/W		*
			850	3556 lm	33.53 W	106.1 lm/W		*
	6000 lm	FPA	835	5449 lm	52.30 W	104.2 lm/W	3-F32T8	*
			840	5868.9 lm	47.5 W	123.6 lm/W	*	
	8000 lm	FPA	835	5993 lm	66.49 W	90.13 lm/W	4-F32T8, 2-F54T5HO, 175 W (MH)	*
			840	6293 lm	66.14 W	95.15 lm/W		*
			850	6650 lm	67.32 W	98.78 lm/W		*

NOTE:
 System data above is based on 120V input voltage.
 Actual performance may differ as a result of end-user environment and application.
 This fixture has been tested and listed in accordance with UL Standards. L.A. Lighting certifies that it will operate safely when installed properly, and within an ambient temperature range from -20°C to 35°C.


Additional lumen packages and color temperatures available.

ACCESSORIES

45MB

- 45-Degree Mounting Bracket
- Designed for mounting lighting fixtures at 45° angle
- Ideal for wall or ceiling mount applications
- 18 ga. electro galvanized steel
- Baked white powder coated finish

Note: Must drill own holes for 45-Degree Mounting Bracket.



CEILING MOUNT




WALL MOUNT




V6

- 6" Leg Height V-Hook
- Two (2) per fixture




YTCS10

- Y-Toggle-End / Cable Suspension System

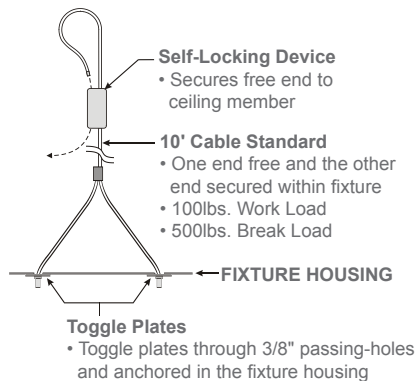

V4CS10

- V-Hook / Cable Suspension System
- Cable set with V4 hooks

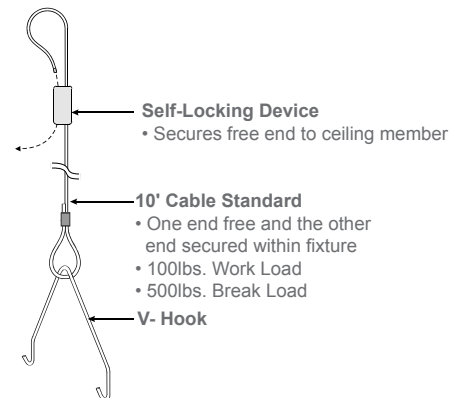

Los Angeles Lighting Mfg. Co.

Headquarters
 10141 Olney Street
 El Monte, CA 91731
 Made in the USA

Contact Us
 T: 626-454-8300
 F: 626-454-8399
 www.lalighting.com

Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.