



RECESSED LED

FWW206 (2FT)

TRIM FLANGED WALL WASH LUMINAIRE

SERIES (4' AVAILABLE)




DATE	
JOB	

WWW.LALIGHTING.COM
626-454-8300


RECESSED MOUNTED LED LUMINAIRE

DIMENSIONS

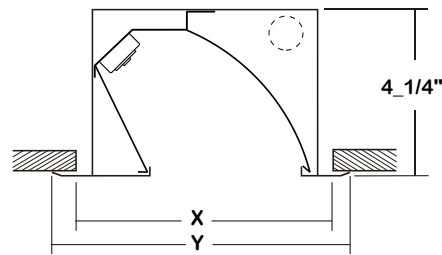

2' Fixture Ceiling Opening
 $X = 6 \frac{1}{2}'' \times 24 \frac{1}{2}''$
 2' Fixture Overall Width By Length
 $Y = 7 \frac{5}{8}'' \times 27''$

ACCESS PLATE 7/8" K.O.

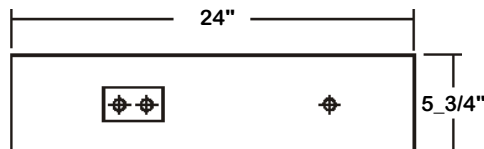

APPLICATIONS

- Commercial, Architectural, Retail

FEATURES

- 0-10V dimming driver standard
- Supports California Title 24 compliance

OPTIONS

- Continuous row mounting available upon request
- Full customization available upon request
- Additional lumen packages and color temperatures available
- Wireless control options available
- Emergency battery pack available
- 20 ga. cold rolled steel housing available
- Hanger yokes available

SPECIFICATIONS

CONSTRUCTION

- 22 ga. cold rolled steel housing
- 18 ga. one piece welded trim flange
- High reflectance low gloss white reflector

FINISH

- Baked white powder coated finish / minimum reflectance 90% / painted after fabrication
- Trim flange: baked white powder coated finish

ELECTRICAL

- High efficiency drivers coupled with long-life LEDs
- Service life greater than 50,000 hours (L70)
- Universal voltage 120V through 277V (347V / 480V available)
- Power Factor (PF) ≥ 0.9
- Total Harmonic Distortion (THD) $\leq 20\%$

LISTING

- UL USA and Canada listed / suitable for damp locations

WARRANTY

- 5-Year limited warranty standard. 10-Year limited warranty also available



Los Angeles Lighting Mfg. Co.
 Contact Us
 T: 626-454-8300 10141 Olney Street
 F: 626-454-8399 El Monte, CA 91731
 www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2022 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 08/13/25



MADE IN THE USA
BABA/BAA Compliant

ORDERING INFORMATION*

EXAMPLE: FWW206-4-2L-BPL1.5-DRDM-UNV-1/840

SERIES	LED LUMEN PACKAGE	EFFICACY	NOMINAL LENGTH	MECHANICAL	ELECTRICAL	DRIVER	VOLTAGE	# OF LED ROW	CRI / CCT
FWW206			2L					1	
FWW206 Trim Flanged Wall Wash LED Luminaire	2 Nom. 2000 Lumens 4 Nom. 4000 Lumens *Additional Lumen Packages Available	(Blank) Standard HE High Efficacy	2L 2'	20G 20 ga. Cold Rolled Steel Housing *Leave Blank if Not Specified	BPL1.5 1500lm Emergency Battery Pack WLC(LED RU) EnOcean Wireless Control *Leave Blank if Not Specified <u>Additional Electrical Options</u>	DRDM 0-10V Dimming Driver	UNV 120V-277V	1 One LED Row	830 80+CRI / 3000K Color Temp. 835 80+CRI / 3500K Color Temp. 840 80+CRI / 4000K Color Temp. 850 80+CRI / 5000K Color Temp. *Additional Color Temp. Available

SYSTEM DATA

THESE ARE THE MOST POPULAR LUMEN PACKAGES. PLEASE CONSULT FACTORY FOR ADDITIONAL SYSTEM DATA.

LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
2000 Lumens (Nominal)	FWW206-2-2L-DRDM-UNV-1/840	1169	12.4	94.5 lm/W	-20°C / 35°C	2-F17T8, 1-F24T5HO	*
4000 Lumens (Nominal)	FWW206-4-2L-DRDM-UNV-1/840	2266	25.8	87.9 lm/W	-20°C / 35°C	4-F17T8, 2-F24T5HO	*

LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE (HIGH EFFICACY) PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
2000 Lumens (Nominal)	FWW206-2HE-2L-DRDM-UNV-1/840	1191	12.1	98.6 lm/W	-20°C / 35°C	2-F17T8, 1-F24T5HO	*
4000 Lumens (Nominal)	FWW206-4HE-2L-DRDM-UNV-1/840	2338	24.8	94.3 lm/W	-20°C / 35°C	4-F17T8, 2-F24T5HO	*

NOTE:

System data as of 8/13/25 (K-Boards when applicable).

Luminaire efficiency: 55.9%

Subject to change without notice.

System data is based on 120V input voltage. Actual performance may differ as a result of end-user environment and application. This fixture has been tested and listed in accordance with UL Standards. L.A. Lighting certifies that it will operate safely when installed proper, and within an ambient temperature range noted in the system data table.

Additional lumen packages and color temperatures available.



Los Angeles Lighting Mfg. Co.

Contact Us
T: 626-454-8300 10141 Olney Street
F: 626-454-8399 El Monte, CA 91731
www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2022 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 08/13/25



MADE IN THE USA
BABA/BAA Compliant