



# WRAPAROUND

## CIT100 SERIES



### Fully Gasketed Enclosure Luminaire



- Fiberglass Housing and Polycarbonate Latches
- Poured In Place Polyurethane Gasket
- Polycarbonate Lineal Ribbed Lens
- Suitable for Damp Locations
- IP65 Rated Enclosure
- Available with :
  - Fluorescent, LED and LED T8 (Internally Driven)
  - Variety of Lenses
  - Stainless Steel Mounting Brackets
  - Stainless Steel Chain Mount V-Hooks
  - Stainless Steel Latches
  - Tamper Proof Screws
  - 95% Enhanced Specular Aluminum Reflectors
  - NSF - Splash Zone / Non-Food Zone



Photometric Data and IES Files are Available on [www.lalighting.com](http://www.lalighting.com)



**LOS ANGELES LIGHTING MFG. CO.**

10141 OLNEY ST. / EL MONTE, CA 91731


TEL : 626-454-8300 FAX : 626-454-8399

[www.lalighting.com](http://www.lalighting.com)




# CIT100 SERIES

## CROSS SECTION

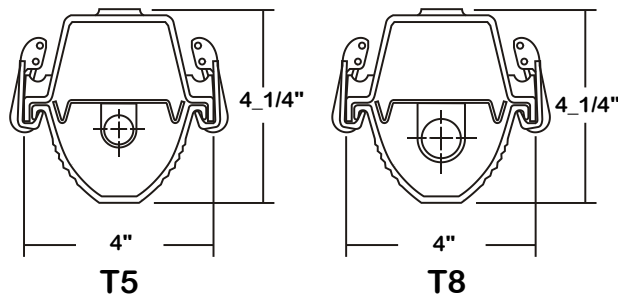

## BACK PLATE

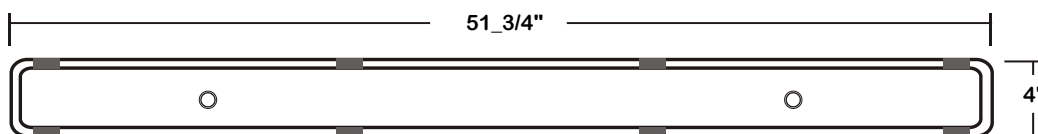

## CATALOG NUMBER

CATALOG NUMBER	NOMINAL LENGTH	TOTAL LAMPS
CIT100-1-4R <sub>1,2,3</sub>	4'	1
CIT100-1-4M-E5 <sub>1,2,3</sub>	4'	1
CIT100-1-4M-E5H <sub>1,2,3</sub>	4'	1


\*Certification Note: 1 - UL Damp Location 2 - UL Wet Location  
3 - NSF Splash Zone

## CIT1/SSMB- MOUNTING BRACKET

- Corrosion resistant stainless steel bracket, two brackets per set.
- Fixture snaps securely into place, mounting method does not require stud in fixture.



## ORDERING GUIDE

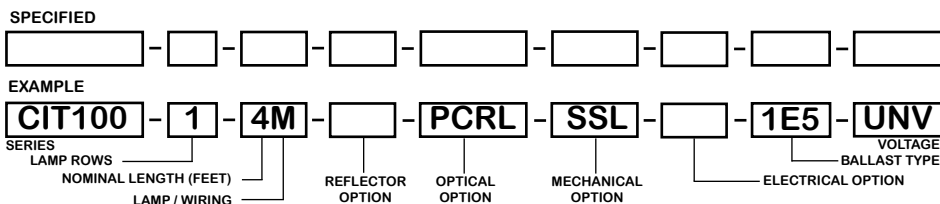

NOTE: LAMP/WIRING\* M= Miniature Bi-Pin T5 R = Medium Bi-Pin T8

## CIT/VH- CHAIN MOUNT V-HOOK

- Corrosion resistant stainless steel V-hooks for chain mount applications, two hooks per set.
- Hooks work in conjunction with stainless steel mounting brackets (CIT1/SSMB), mounting brackets sold separately.



## OPTIONS AND ACCESSORIES

<ul style="list-style-type: none"> <li><b>REFLECTOR OPTIONS</b></li> <li>Specular Aluminum Reflector (95%) SUFFIX SR</li> <li><b>OPTICAL OPTIONS</b></li> <li>Polycarbonate Ribbed Lens SUFFIX PCRL</li> <li>High Impact Ribbed Acrylic Lens DRRL</li> <li>High Impact Ribbed Acrylic Lens Frosted DRRLFR</li> </ul>	<ul style="list-style-type: none"> <li><b>MECHANICAL OPTIONS</b></li> <li>Wet Location (Two Mtg. Brackets and One Watertight Hub Provided) SUFFIX WL</li> <li>Stainless Steel Latches SSL</li> <li>Stainless Steel Tamper Proof Screws TP</li> <li>NSF - Splash Zone / Non - Food Zone SZ</li> <li><b>ELECTRICAL OPTIONS</b></li> <li>Emergency Battery Pack SUFFIX BP*</li> <li>External Line Fusing (HLR/GLR) ELF</li> </ul>	<ul style="list-style-type: none"> <li><b>BALLAST OPTIONS</b></li> <li>Electronic T5 SUFFIX E5*</li> <li>Electronic T5HO E5H</li> <li>Electronic Step Dimming T5HO E5DM5H</li> <li>Electronic T8 E8*</li> <li>Electronic Step Dimming T8 E8DM8*</li> <li><b>ACCESSORIES</b></li> <li>Stainless Steel Mounting Brackets CAT. NO. CIT1/SSMB</li> <li>Stainless Steel Chain Mount V-hooks CIT/VH</li> <li>- Work with SSMB</li> </ul>
--	--	--

\*See Appropriate Reference Page

## SPECIFICATIONS

- TYPE** Surface mounted, fully enclosed and gasketed luminaire for installation in damp or wet locations as specified.
- CONSTRUCTION** Fiberglass housing. 22 ga. cold rolled steel internal snap-on gear tray/cover with safety strap attached.
- FINISH** Gear tray - Baked white polyester finish, minimum reflectance 86%. (Powder coated finish available.)
- OPTICS** Polycarbonate lens, linear ribbed lens design. Lens secured to fiberglass housing by polycarbonate latches, stainless steel latches available.
- WIRING** UNV (universal voltage 120v thru 277v.) ballasts as available, or as otherwise specified.
- LABELS** U.L. Listed. Suitable for damp locations.

