



VAPOR TIGHT CIT400

® 14 1/2" WIDE FULLY GASKETED VAPOR TIGHT LUMINAIRE

JOB


TYPE

DATE


SURFACE/SUSPENSION MOUNTED LED LUMINAIRE



CROSS SECTION

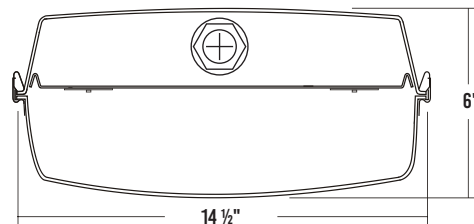


2' BACKPLATE

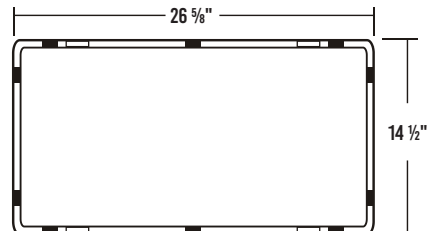

□ Mounting Tab Locations

■ Latch Locations

4' BACKPLATE

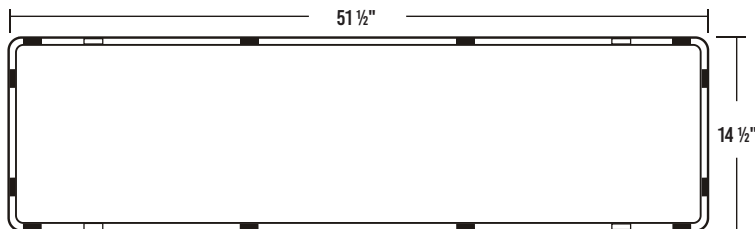

*Creating any hole in housing will invalidate wet location rating

SPECIFICATIONS

CONSTRUCTION

- IP65 / IP66 / IP67 / NEMA 4x rated enclosure
- Fiberglass housing with poured-in-place polyurethane gasket
- Stainless steel latches and mounting tabs
- 22 gauge cold-rolled steel internal snap-on gear tray/cover

FINISH

- Gear tray - baked white polyester finish / minimum reflectance 86%

OPTICAL

- Impact-resistant smooth acrylic frosted lens

ELECTRICAL

- High efficiency drivers coupled with long-life LEDs
- Service life tested at 50,000 hours (L70)
- Universal voltage 120V~277V (347V/480V available)
- Power Factor (PF) ≥ 0.9
- Total Harmonic Distortion (THD) $\leq 20\%$

LISTING

- UL USA and Canada listed
- Suitable for damp locations

WARRANTY

- 5-year limited warranty, 10-year limited warranty available

APPLICATIONS

- Commercial, Refrigeration, Dusty Areas, Freezer, Food Processing

FEATURES

- Rated for wet locations and washdown applications
- 0-10V Dimming driver standard
- Supports California Title 24 compliance

OPTIONS CONTACT CUSTOMER SERVICE FOR ADDITIONAL OPTIONS

- Range of lumen packages
- High ambient temperature (HT) modules
- Range of lenses
- Sensors and controls
- Second pre-installed watertight hub
- Stainless steel ceiling mount hangers
- Stainless steel tamper-proof screws
- NSF Splash Zone Certification
- Cord & plug
- Emergency battery pack
- 10 kV surge protector
- Tunable white (2700K - 6500K)
- Customization available upon request



Los Angeles Lighting Mfg. Co.

Contact Us

T: 626-454-8300
F: 626-454-8399
www.lalighting.com

10141 Olney Street
El Monte, CA 91731
Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2026 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised 6/16/26



ORDERING INFORMATION

EXAMPLE: CIT400-8-4L-DRFA-WL-BPL1.5-DRDM-UNV-2/840HT

SERIES	NOMINAL LED LUMENS	NOMINAL LENGTH	OPTICAL	RATING	MECHANICAL	CONTROLS / ELECTRICAL	DRIVER	VOLTAGE	# OF LED ROWS	CRI / CCT	AMBIENT TEMP
CIT400				WL					2		
CIT400 • 14 1/2" Wide Fully Gasketed Vapor Tight Luminaire	1 - 1000lm 2 - 2000lm 3 - 43000lm 4 - 4000lm 6 - 6000lm 8 - 8000lm 12 - 12000lm 16 - 16000lm High Efficacy 1HE - 1000lm 2HE - 2000lm 3HE - 3000lm 4HE - 4000lm 6HE - 6000lm 8HE - 8000lm 12HE - 12000lm	2L • 2'	DRFA • High Impact Smooth Acrylic Frosted Lens FPC • Impact Resistant Frosted Polycarbonate	WL • Wet Location Hardware (Includes 1 Pre-Installed Watertight Hub)	SZ • Splash Zone Certification WTHUB • Second Pre-Installed Watertight Hub TP • Stainless Steel Tamper Proof Screws LT • Lens Tethers *Leave blank if not specified	MSEW(xx) • End-Mounted Sensor • Wet Location • PIR Motion Sensor WLC(LED RU) • Wireless Control BPL1.5 • 1500lm Emergency Battery Pack SP10 • 10 kV Surge Protector *Leave blank if not specified	DRDM • 0-10V Dimming Driver DRDM2C • 2-Channel 0-10V Dimming Driver (for Color Tunable White) DRSD • Step Dimming Driver DR2W • 120V 2-Wire Phase Dimming Driver (Must Specify 120V in Voltage Column)	UNV • 120V - 277V UCV • 120V-347V 120V 120 Volt (For DR2W Driver Type) 347V • 347 Volt 480V • 480 Volt	2 • 2 LED Rows	827 • 80+CRI / 2700K 830 • 80+CRI / 3000K 835 • 80+CRI / 3500K 840 • 80+CRI / 4000K 850 • 80+CRI / 5000K 865 • 80+CRI / 6500K 8TW • 80+CRI Tunable White 2700K-6500K Requires DRDM2C driver 90CRI Also available Contact customer service for additional CRI/CCT packages.	HT • High Ambient Temp. CT • Cold Ambient Temp. ECT • Extra Cold Ambient Temp.
	2 - 2000lm 4 - 84000lm 6 - 6000lm 8 - 8000lm 12 - 12000lm 16 - 16000lm 24 - 24000lm 32 - 32000lm High Efficacy 2 - 2000lm 4 - 4000lm 6 - 6000lm 8 - 8000lm 12 - 12000lm 16 - 16000lm 24 - 24000lm	4L • 4'									

Most common options for CIT400 shown above. For additional options, including lumen packages, controls, lenses, colors/finishes, cord & plug, switches, and more visit www.lalighting.com/resources or contact customer service.

OPTICAL OPTIONS

ADDITIONAL LENSES AVAILABLE. VISIT WWW.LALIGHTING.COM/RESOURCES FOR MORE INFORMATION

STANDARD LENSES FOR CIT400

DRFA	Impact-Resistant Smooth Acrylic Frosted
FPC	*Impact-Resistant Polycarbonate Smooth Frosted

ADDITIONAL LENSES FOR CIT400

CPC	*Impact-Resistant Clear Polycarbonate
DRCA	Impact-Resistant Smooth Clear Acrylic

Note:

*When ordering for a Ambient Temperature Range between -20°C to -40°C a Polycarbonate Lens is required.

For more information on Extra Cold Temperature (ECT) see Ambient Temperature Option link below.

[Click Here for Ambient Temperature Document](#)



Los Angeles Lighting Mfg. Co.
 Contact Us
 T: 626-454-8300
 F: 626-454-8399
www.lalighting.com
 10141 Olney Street
 El Monte, CA 91731
 Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2026 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised 6/16/26




MECHANICAL OPTIONS

Pre-installed mechanical options are ordered by adding the suffix to the luminaire description:
CIT400-4-4L-DRFA-WL-WTHUB-DRDM-UNV-2/840

**WATERTIGHT HUB
WTHUB**

- Zinc die cast hub with rubber gasket seal
- Threaded to fit 1/2" pipe
- One pre-installed hub included on all luminaires
- Second pre-installed hub included when specifying WTHUB


**TAMPER PROOF SCREWS
TP**

- Hex Pin Stainless Steel Tamper Proof Screws


**LENS TETHERS
LT**


- Secure lens to enclosure
- Includes two tethers per luminaire
- When ordering separately to install on an existing luminaire, use **CIT4/LT**

MOUNTING ACCESSORIES

Mounting accessories are ordered separately from luminaire

Note:


All CIT400 series products come with four stainless steel mounting tabs, two on each side of fixture housing. Tabs can be used with V-hooks, ceiling mount hangers, cable, or chain.

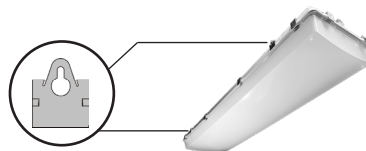

Stainless Steel Mounting Tabs (included with fixture)

**STAINLESS STEEL V-HOOK
CIT4/VH**


- Corrosion-resistant stainless steel V-Hook for suspension mounting
- Hooks work in conjunction with cable suspension systems (CS10) or chain by others
- Two (2) required per fixture


**CEILING MOUNT HANGER
CIT4/CM**


- Corrosion resistant stainless steel for ceiling mount applications
- Two (2) required per fixture


**CABLE SUSPENSION SYSTEMS
CIT4/CS10**

- Cable system kit with V-hooks
- Includes 2x CS10 cable systems and 2x stainless steel V-hooks (CIT4/VH)

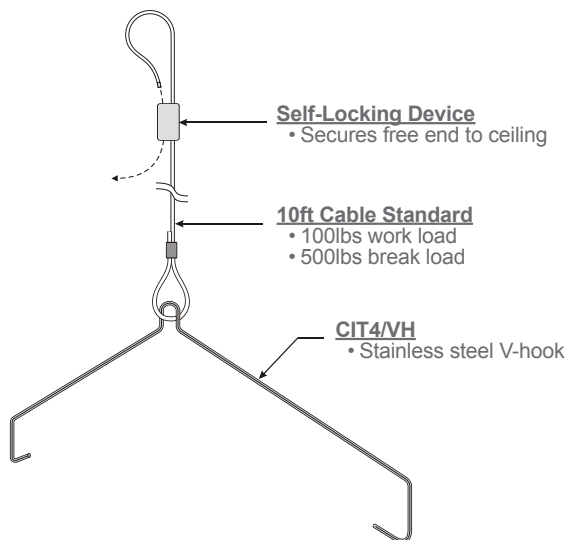
**CABLE SUSPENSION SYSTEM
CS10**

- Two (2) required per fixture

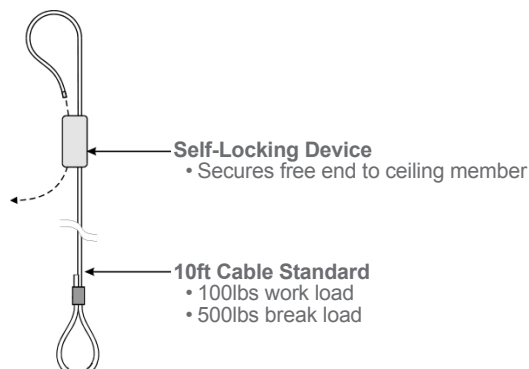

Los Angeles Lighting Mfg. Co.
 Contact Us
 T: 626-454-8300
 F: 626-454-8399
 www.lalighting.com
 10141 Olney Street
 El Monte, CA 91731
 Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2026 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised 6/16/26



SYSTEM DATA

ADDITIONAL LUMEN PACKAGES AVAILABLE. CONTACT CUSTOMER SERVICE FOR MORE INFORMATION

2' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
1000 Lumens (Nominal)	CIT400-1-2L-DRFA-DRDM-UNV-2/840	1211	7.2	168.1 lm/W	-20°C / 35°C (-4°F / 95°F)	1x F17T8	*
2000 Lumens (Nominal)	CIT400-2-2L-DRFA-DRDM-UNV-2/840	1995	12.1	165 lm/W	-20°C / 35°C (-4°F / 95°F)	1x F24T5HO 2x F17T8	*
3000 Lumens (Nominal)	CIT400-3-2L-DRFA-DRDM-UNV-2/840	3154	19.7	160.4 lm/W	-20°C / 35°C (-4°F / 95°F)	3x F17T8	*
4000 Lumens (Nominal)	CIT400-4-2L-DRFA-DRDM-UNV-2/840	3915	24.7	158.2 lm/W	-20°C / 35°C (-4°F / 95°F)	2x F24T5HO 4x F17T8	*
6000 Lumens (Nominal)	CIT400-6-2L-DRFA-DRDM-UNV-2/840	5780	37.9	152.6 lm/W	-20°C / 35°C (-4°F / 95°F)	3x F24T5HO 6x F17T8	*
8000 Lumens (Nominal)	CIT400-8-2L-DRFA-DRDM-UNV-2/840	7590	51.5	147.2 lm/W	-20°C / 35°C (-4°F / 95°F)	2x F54T5HO 4x F24T5HO	*
12000 Lumens (Nominal)	CIT400-12-2L-DRFA-DRDM-UNV-2/840	11559	75.8	152.6 lm/W	-20°C / 35°C (-4°F / 95°F)	3x F54T5HO 6x F24T5HO	*
16000 Lumens (Nominal)	CIT400-16-2L-DRFA-DRDM-UNV-2/840	15233	96.2	158.3 lm/W	-20°C / 35°C (-4°F / 95°F)	4x F54T5HO 8x F24T5HO	*
2' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE (HIGH EFFICACY) PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
1000 Lumens (Nominal)	CIT400-1HE-2L-DRFA-DRDM-UNV-2/840	1234	7.1	174.2 lm/W	-20°C / 35°C (-4°F / 95°F)	1x F17T8	*
2000 Lumens (Nominal)	CIT400-2HE-2L-DRFA-DRDM-UNV-2/840	2027	11.9	169.8 lm/W	-20°C / 35°C (-4°F / 95°F)	1x F24T5HO 2x F17T8	*
3000 Lumens (Nominal)	CIT400-3HE-2L-DRFA-DRDM-UNV-2/840	2815	16.8	167.6 lm/W	-20°C / 35°C (-4°F / 95°F)	3x F17T8	*
4000 Lumens (Nominal)	CIT400-4HE-2L-DRFA-DRDM-UNV-2/840	3989	24.2	165 lm/W	-20°C / 35°C (-4°F / 95°F)	2x F24T5HO 4x F17T8	*
6000 Lumens (Nominal)	CIT400-6HE-2L-DRFA-DRDM-UNV-2/840	5923	36.7	161.5 lm/W	-20°C / 35°C (-4°F / 95°F)	3x F24T5HO 6x F17T8	*
8000 Lumens (Nominal)	CIT400-8HE-2L-DRFA-DRDM-UNV-2/840	7830	49.5	158.2 lm/W	-20°C / 35°C (-4°F / 95°F)	2x F54T5HO 4x F24T5HO	*
2' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE (HIGH EFFICACY) PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
2000 Lumens (Nominal)	CIT400-2-2L-DRFA-DRDM-UNV-2/840HT	2048	11.9	172.3 lm/W	-30°C / 50°C (-22°F / 122°F)	1x F24T5HO 2x F17T8	*
4000 Lumens (Nominal)	CIT400-4-2L-DRFA-DRDM-UNV-2/840HT	4084	24.5	167 lm/W	-30°C / 50°C (-22°F / 122°F)	2x F24T5HO 4x F17T8	*
6000 Lumens (Nominal)	CIT400-6-2L-DRFA-DRDM-UNV-2/840HT	5676	34.9	162.8 lm/W	-30°C / 50°C (-22°F / 122°F)	3x F24T5HO 6x F17T8	*
8000 Lumens (Nominal)	CIT400-8-2L-DRFA-DRDM-UNV-2/840HT	7617	48.1	158.3 lm/W	-30°C / 50°C (-22°F / 122°F)	2x F54T5HO 4x F24T5HO	*
12000 Lumens (Nominal)	CIT400-12-2L-DRFA-DRDM-UNV-2/840HT	11341	76.1	149 lm/W	-30°C / 40°C (-22°F / 104°F)	3x F54T5HO 6x F24T5HO	*
16000 Lumens (Nominal)	CIT400-16-2L-DRFA-DRDM-UNV-2/840HT	15233	96.2	158.3 lm/W	-30°C / 40°C (-22°F / 104°F)	4x F54T5HO 8x F24T5HO	*



Los Angeles Lighting Mfg. Co.

Contact Us

T: 626-454-8300

F: 626-454-8399

www.lalighting.com

10141 Olney Street

El Monte, CA 91731

Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice.
Please visit our website to view the most current information.

© 2026 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised 6/16/26

MADE IN THE USA
BAA/BABA Compliant

SYSTEM DATA

ADDITIONAL LUMEN PACKAGES AVAILABLE. CONTACT CUSTOMER SERVICE FOR MORE INFORMATION

4' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
2000 Lumens (Nominal)	CIT400-2-4L-DRFA-DRDM-UNV-2/840	2022	11.9	169.3 lm/W	-20°C / 35°C (-4°F / 95°F)	1x F32T8	*
4000 Lumens (Nominal)	CIT400-4-4L-DRFA-DRDM-UNV-2/840	3978	24.2	164.6 lm/W	-20°C / 35°C (-4°F / 95°F)	1x F54T5HO 2x F32T8	*
6000 Lumens (Nominal)	CIT400-6-4L-DRFA-DRDM-UNV-2/840	5907	36.7	161 lm/W	-20°C / 35°C (-4°F / 95°F)	3x F32T8	*
8000 Lumens (Nominal)	CIT400-8-4L-DRFA-DRDM-UNV-2/840	7808	49.5	157.8 lm/W	-20°C / 35°C (-4°F / 95°F)	2x F54T5HO 4x F32T8	*
12000 Lumens (Nominal)	CIT400-12-4L-DRFA-DRDM-UNV-2/840	11528	75.8	152.1 lm/W	-20°C / 35°C (-4°F / 95°F)	3x F54T5HO 6x F32T8	*
16000 Lumens (Nominal)	CIT400-16-4L-DRFA-DRDM-UNV-2/840	15137	103.1	146.8 lm/W	-20°C / 35°C (-4°F / 95°F)	4x F54T5HO	*
24000 Lumens (Nominal)	CIT400-24-4L-DRFA-DRDM-UNV-2/840	22688	149.0	152.2 lm/W	-20°C / 35°C (-4°F / 95°F)	6x F54T5HO	*
32000 Lumens (Nominal)	CIT400-32-4L-DRFA-DRDM-UNV-2/840	30000	189.9	158 lm/W	-20°C / 35°C (-4°F / 95°F)	8x F54T5HO	*
4' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE (HIGH EFFICACY) PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
2000 Lumens (Nominal)	CIT400-2HE-4L-DRFA-DRDM-UNV-2/840	2066	11.9	174.2 lm/W	-20°C / 35°C (-4°F / 95°F)	1x F32T8	*
4000 Lumens (Nominal)	CIT400-4HE-4L-DRFA-DRDM-UNV-2/840	4043	23.9	169.3 lm/W	-20°C / 35°C (-4°F / 95°F)	1x F54T5HO 2x F32T8	*
6000 Lumens (Nominal)	CIT400-6HE-4L-DRFA-DRDM-UNV-2/840	5615	33.6	167.1 lm/W	-20°C / 35°C (-4°F / 95°F)	3x F32T8	*
8000 Lumens (Nominal)	CIT400-8HE-4L-DRFA-DRDM-UNV-2/840	7567	45.8	165.1 lm/W	-20°C / 35°C (-4°F / 95°F)	2x F54T5HO 4x F32T8	*
12000 Lumens (Nominal)	CIT400-12HE-4L-DRFA-DRDM-UNV-2/840	11430	70.8	161.5 lm/W	-20°C / 35°C (-4°F / 95°F)	3x F54T5HO 6x F32T8	*
16000 Lumens (Nominal)	CIT400-16HE-4L-DRFA-DRDM-UNV-2/840	15238	96.3	158.3 lm/W	-20°C / 35°C (-4°F / 95°F)	4x F54T5HO	*
24000 Lumens (Nominal)	CIT400-24HE-4L-DRFA-DRDM-UNV-2/840	22643	139.2	162.7 lm/W	-20°C / 35°C (-4°F / 95°F)	6x F54T5HO	*
4' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE (HIGH EFFICACY) PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
4000 Lumens (Nominal)	CIT400-4-4L-DRFA-DRDM-UNV-2/840HT	3978	24.2	164.6 lm/W	-30°C / 50°C (-22°F / 122°F)	1x F54T5HO 2x F32T8	*
8000 Lumens (Nominal)	CIT400-8-4L-DRFA-DRDM-UNV-2/840HT	7808	49.5	157.8 lm/W	-30°C / 50°C (-22°F / 122°F)	2x F54T5HO 4x F32T8	*
12000 Lumens (Nominal)	CIT400-12-4L-DRFA-DRDM-UNV-2/840HT	11528	75.8	152.1 lm/W	-30°C / 50°C (-22°F / 122°F)	3x F54T5HO 6x F32T8	*
16000 Lumens (Nominal)	CIT400-16-4L-DRFA-DRDM-UNV-2/840HT	15137	103.1	146.8 lm/W	-30°C / 50°C (-22°F / 122°F)	4x F54T5HO	*
20000 Lumens (Nominal)	CIT400-20-4L-DRFA-DRDM-UNV-2/840HT	18990	122.4	155.2 lm/W	-30°C / 50°C (-22°F / 122°F)	5x F54T5HO	*
24000 Lumens (Nominal)	CIT400-24-4L-DRFA-DRDM-UNV-2/840HT	22688	149.0	152.2 lm/W	-30°C / 40°C (-22°F / 104°F)	6x F54T5HO	*
32000 Lumens (Nominal)	CIT400-32-4L-DRFA-DRDM-UNV-2/840HT	30000	189.9	158 lm/W	-30°C / 40°C (-22°F / 104°F)	8x F54T5HO	*

NOTE:

System data as of 6/16/26 (K-Boards when applicable).
 Luminaire efficiency: 2ft 93.6%, 4ft 93.3%
 Subject to change without notice.

System data is based on 120V input voltage. Actual performance may differ as a result of end-user environment and application. This fixture has been tested and listed in accordance with UL Standards. L.A. Lighting certifies that it will operate safely when installed properly, and within an ambient temperature range noted in the system data table.

Additional lumen packages and color temperatures available.



Los Angeles Lighting Mfg. Co.

Contact Us

T: 626-454-8300

F: 626-454-8399

www.lalighting.com

10141 Olney Street

El Monte, CA 91731

Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2026 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised 6/16/26

