





**DRIVER OPTIONS**

PLEASE CONSULT FACTORY TO SEE IF YOUR SELECTED DRIVER OPTION WORKS WITH THIS FIXTURE.

**DRDM (TY) UNV**

**VOLTAGE**

- 120V** 120 Volt
- 277V** 277 Volt
- UNV** Universal 120-277 Volt \*
- 347V** 347 Volt
- 480V** 480 Volt

**TY**

**TY** 10-Years Limited Warranty

**DRIVER TYPE**

- DRDM** 0-10V Dimming Driver \*
- DRDM1** 0-10V Dimming Driver, 1% Dimming
- DRDM2C** 2-Channel 0-10V Dimming Driver (for Color Tunable White)
- DR2W** 2-Wire Phase Dimming Driver
- DRDA** Digital Addressable DALI Dimming Driver
- DRDA2C** Digit Digital Addressable DALI Type8 2-Channel Driver (for Color Tunable White)
- DRDA2.0** Digital Addressable DALI 2.0 Dimming Driver
- DRDA2.02C** Digital Addressable DALI 2.0 Type8 2-Channel Driver (for Color Tunable White)
- DRSD** Step Dimming Driver
- DR(LTEA2W)** Lutron® 2-Wire 1% Dimming Driver (120V Forward Phase only)
- DR(LDE1)** Lutron® EcoSystem 1% Soft-On, Fade-to-Black™ Dimming Driver
- DR(LDE5)** Lutron® EcoSystem 5% Dimming Driver
- DR(PEQ0E)** Lutron® EcoSystem 0.1% Soft-On, Fade-to-Black Dimming Driver
- DR(PSQ020)** Lutron® T-Series Digital 1% Dimming 2-Channel Driver (for Color Tunable White)
- DRCR** Control Ready Driver
- DRCR(DXL)** Osram Dexal Driver
- DRCR(SR)** Philips Sensor Ready Driver

**BATTERY PACK OPTIONS**

PLEASE CONSULT FACTORY TO SEE IF YOUR SELECTED BATTERY PACK OPTION WORKS WITH THIS FIXTURE.

LED EMERGENCY BATTERY PACKS  
(Operate for 90 minutes unless otherwise specified)

**BPL SL 1.5 (2H)**

**NOTE**

**2H** 2 hours

**LUMEN PACKAGE**

- 0.7** Nominal 750 Lumens
  - 1.5** Nominal 1500 Lumens \*
  - 3.0** Nominal 3000 Lumens
- \*Additional lumen packages available*

**TYPE**

- (Blank)** Normal Ambient Temp. / Standard Operation
- C** Cold Environment (-20°C)
- F** With Flex for Remote Mounting
- SL** Slim Casing
- ST** Self Test / Diagnostic

\* Normal Stock Item



**Los Angeles Lighting Mfg. Co.**  
 Headquarters  
 10141 Olney Street  
 El Monte, CA 91731  
 Made in the USA

Contact Us  
 T: 626-454-8300  
 F: 626-454-8399  
 www.lalighting.com



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

©2021 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised 07/13/20









# PHOTOMETRIC DATA - GCR720 SERIES

## GCR720-4-4L-FSW-PA2-DRDM-UNV-2/840

TEST NO. = LA-T3174-2  
 LED TYPE = 48 LED MODULE  
 NO. OF MODULE = 4  
 SYSTEM WATT (W) = 31.3  
 CRI ≥ 80  
 L70(Hrs.) ≥ 50,000  
 PHOTOMETRY TYPE = C

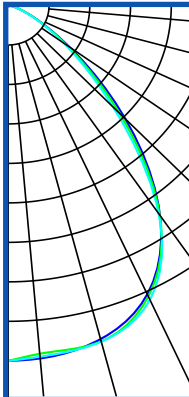

### CANDLEPOWER

ANGLE	END	45	CROSS
0	1872	1872	1872
5	1867	1841	1857
15	1820	1832	1833
25	1679	1691	1710
35	1350	1349	1339
45	845	804	757
55	380	363	346
65	134	131	126
75	37	36	36
85	5	5	5
90	0	0	0
95	0	0	0
115	0	0	0
125	0	0	0
135	0	0	0
145	0	0	0
155	0	0	0
165	0	0	0
175	0	0	0
180	0	0	0

### ZONAL LUMEN SUMMARY

DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	1479	32.9	42.9
0-40	2325	51.8	67.4
0-60	3273	73.0	94.9
0-90	3447	76.8	100.0
90-120	.04	0.0	0.0
90-150	.04	0.0	0.0
90-180	.04	0.0	0.0
0-180	3447	76.8	100.00



Luminaire Output= 3447 lumens  
 Luminaire Efficacy = 110.1 lm/W

### SPACING CRITERION

ALONG	ACROSS
1.19	1.20

## GCR720-6-4L-FSW-PA2-DRDM-UNV-2/840

TEST NO. = LA-T3395-2  
 LED TYPE = 48 LED MODULE  
 NO. OF MODULE = 4  
 SYSTEM WATT (W) = 45.5  
 CRI ≥ 80  
 L70(Hrs.) ≥ 50,000  
 PHOTOMETRY TYPE=C

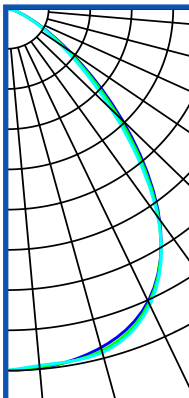

### CANDLEPOWER

ANGLE	END	45	CROSS
0	2707	2707	2707
5	2698	2689	2679
15	2625	2650	2664
25	2416	2430	2447
35	1924	1914	1906
45	1178	1133	1071
55	533	505	478
65	190	183	176
75	52	52	50
85	7	7	6
90	0	0	0
95	0	0	0
115	0	0	0
125	0	0	0
135	0	0	0
145	0	0	0
155	0	0	0
165	0	0	0
175	0	0	0
180	0	0	0

### ZONAL LUMEN SUMMARY

DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	2132	34	43
0-40	3335	53	68
0-60	4662	75	95
0-90	4904	79	100
90-120	0	0	0
90-150	0	0	0
90-180	0	0	0
0-180	4904	79	100

Luminaire Output= 4903.7 lumens  
 Luminaire Efficacy = 107.8 lm/W

### SPACING CRITERION

ALONG	ACROSS
1.19	1.19



**Los Angeles Lighting Mfg. Co.**  
 Headquarters  
 10141 Olney Street  
 El Monte, CA 91731  
 Made in the USA  
 Contact Us  
 T: 626-454-8300  
 F: 626-454-8399  
 www.lalighting.com



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

©2021 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised 07/13/20

