



INDUSTRIAL

IND220

SERIES 4FT, 8FT
11" WIDE INDUSTRIAL LUMINAIRE




JOB	
TYPE	
DATE	


SUSPENSION/SURFACE MOUNTED LED LUMINAIRE




CROSS SECTION

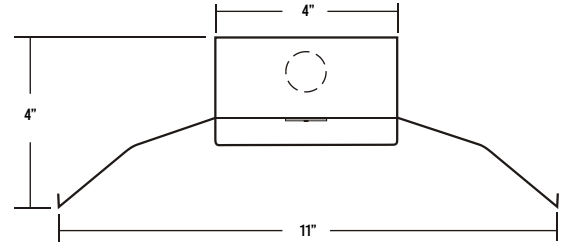

4' BACKPLATE



8' BACKPLATE



SPECIFICATIONS

CONSTRUCTION

- 20 gauge cold-rolled steel housing
- 24 gauge cold-rolled steel reflector secured by quarter turn fasteners
- End plates fastened to housing by sheet metal screws to assure rigidity

FINISH

- Baked white polyester finish
- Minimum reflectance 86%

ELECTRICAL

- High efficiency drivers coupled with long-life LEDs
- Service life tested at 50,000 hours (L70)
- Universal voltage 120V through 277V (347V / 480V available)
- Power Factor (PF) ≥ 0.9
- Total Harmonic Distortion (THD) $\leq 20\%$

LISTING

- UL USA and Canada listed / suitable for damp locations

WARRANTY

5-Year limited warranty standard. 10-Year limited warranty also available

APPLICATIONS

- Warehouse, Industrial, Commercial

FEATURES

- 0-10V Dimming driver standard
- End plates may be used as channel couplings for continuous row mounting (surface mounted applications only)
- For hanging use Chain Mount Coupler (see mounting accessories)
- Supports California Title 24 compliance
- Suitable for damp location

OPTIONS CONTACT CUSTOMER SERVICE FOR ADDITIONAL OPTIONS

- Controls
- 14 gauge wire guard
- Emergency battery pack
- 10 kV surge protector
- Tunable white (2700K-6500K)
- Wireless Controls and sensors
- Customization available upon request



Los Angeles Lighting Mfg. Co.
Contact Us
T: 626-454-8300
F: 626-454-8399
www.lalighting.com

10141 Olney Street
El Monte, CA 91731
Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2026 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 05/14/26



ORDERING INFORMATION

EXAMPLE: IND220-4-4L-BPL1.5-DRDM-UNV-1/840

SERIES	NOMINAL LED LUMENS	NOMINAL LENGTH	CONTROLS	ELECTRICAL	DRIVER	VOLTAGE	# OF LED ROWS	CRI / CCT
IND220							1	
IND220 • 11" Wide Industrial	2 - 2000lm 4 - 4000lm 6 - 6000lm 8 - 8000lm	4 • 4L	MS(xx) • Motion Sensor • Lens Option WLC(LED RU) • Wireless Control	BPL1.5 • Emergency Battery Pack 1500 lm SP10 • 10 kV Surge Protector	DRDM • 0-10V Dimming Driver DRDM2C • 2-Channel 0-10V Dimming Driver (for Color Tunable White) DRSD • Step Dimming Driver DR2W • 120V 2-Wire Phase Dimming Driver (Must Specify 120V in Voltage Column)	UNV • 120V-277V UCV • 120V-347V 120V • 120 Volt (For DR2W Driver Type) 347V • 277 Volt 480V • 480 Volt	1 • 1 LED Row	827 • 80+CRI / 2700K 830 • 80+CRI / 3000K 835 • 80+CRI / 3500K 840 • 80+CRI / 4000K 850 • 80+CRI / 5000K 865 • 80+CRI / 6500K 8TW • 80+CRI Tunable White 2700K-6500K Requires DRDM2C driver 90CRI Also available Contact customer service for additional CRI/CCT packages.
	4 - 4000lm 8 - 8000lm 12 - 12000lm 16 - 16000lm	8 • 8L	*Leave blank if not specified	*Leave blank if not specified				

Standard options for IND220 shown above. For additional options, including lumen packages, controls, lenses, switches, finishes, and more, visit www.lalighting.com/resources or contact customer service.

SYSTEM DATA

ADDITIONAL LUMEN PACKAGES AVAILABLE. CONTACT CUSTOMER SERVICE FOR MORE INFORMATION

4' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
2000 Lumens (Nominal)	IND220-2-4L-DRDM-UNV-1/840	2131	12.1	176.3 lm/W	-20°C / 35°C (-4°F / 95°F)	1-F32T8	*
4000 Lumens (Nominal)	IND220-4-4L-DRDM-UNV-1/840	4182	24.7	169 lm/W	-20°C / 35°C (-4°F / 95°F)	2-F32T8, 1-F54T5HO	*
6000 Lumens (Nominal)	IND220-6-4L-DRDM-UNV-1/840	6174	37.9	163 lm/W	-20°C / 35°C (-4°F / 95°F)	3-F32T8	*
8000 Lumens (Nominal)	IND220-8-4L-DRDM-UNV-1/840	8107	51.5	157.3 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F32T8, 2-F54T5HO	*

8' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
4000 Lumens (Nominal)	IND220-4-4L-DRDM-UNV-1/840	4261	24.2	176.3 lm/W	-20°C / 35°C (-4°F / 95°F)	2-F32T8	*
8000 Lumens (Nominal)	IND220-8-4L-DRDM-UNV-1/840	8364	49.5	169 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F32T8, 2-F54T5HO	*
12000 Lumens (Nominal)	IND220-12-4L-DRDM-UNV-1/840	12349	75.8	163 lm/W	-20°C / 35°C (-4°F / 95°F)	6-F32T8	*
16000 Lumens (Nominal)	IND220-16-4L-DRDM-UNV-1/840	16214	103.1	157.3 lm/W	-20°C / 35°C (-4°F / 95°F)	8-F32T8, 4-F54T5HO	*

NOTE:
System data as of 5/14/26 (K-Boards when applicable).
Luminaire efficiency: 4ft - 99.9%, 8ft - 99.9%
Subject to change without notice.

System data is based on 120V input voltage. Actual performance may differ as a result of end-user environment and application. This fixture has been tested and listed in accordance with UL Standards. L.A. Lighting certifies that it will operate safely when installed properly, and within an ambient temperature range noted in the system data table.

Additional lumen packages and color temperatures available.



Los Angeles Lighting Mfg. Co.
Contact Us
T: 626-454-8300
F: 626-454-8399
www.lalighting.com
10141 Olney Street
El Monte, CA 91731
Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2026 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.


Revised: 05/14/26




MADE IN THE USA
BABA/BAA Compliant

MOUNTING ACCESSORIES


Y-TOGGLE-END / CABLE SUSPENSION SYSTEM

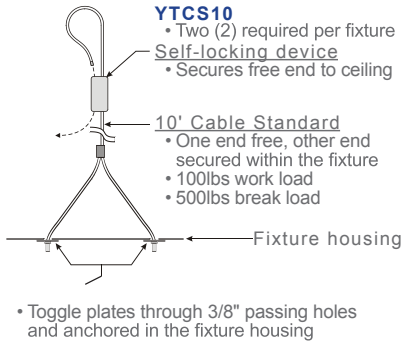

CABLE SUSPENSION SYSTEM

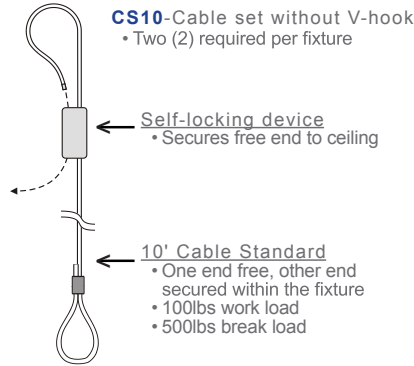


V-HOOK / CABLE SUSPENSION SYSTEM

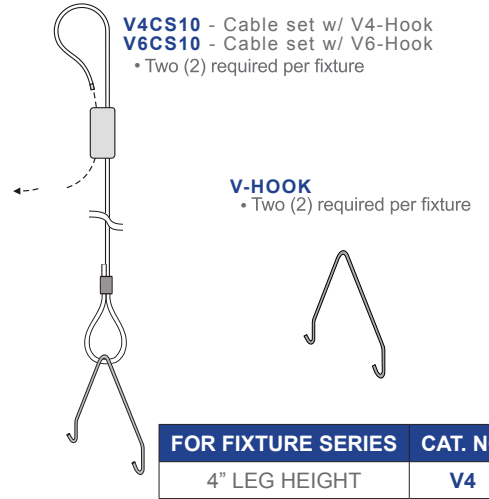

CHAIN MOUNT COUPLING

- Chain mount coupling with lift-up tabs for installation of V-Hooks when chain mounted
- Baked white enamel finish



CMC-245

LUMINAIRE MODEL	CAT. NO.
IND220	CMC-245

ACCESSORIES

WGN14-IND220-4

- 14 gauge Wire Guard
- Chrome epoxy powder coated finish
- Two wire guards required for 8' luminaire



Los Angeles Lighting Mfg. Co.

Contact Us
 T: 626-454-8300 10141 Olney Street
 F: 626-454-8399 El Monte, CA 91731
 www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2026 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 05/14/26



MADE IN THE USA
 BABA/BAA Compliant