



WRAPAROUND LED

WSE201

SERIES 2FT, 3FT, 4FT, 8FT
LED WRAPAROUND SECURITY HIGH IMPACT RADIAL SENSOR CONTROLLED

JOB	
TYPE	
DATE	

WWW.LALIGHTING.COM






TEL: 626-454-8300

SURFACE/STEM/SUSPENSION MOUNTED LED LUMINAIRE



*Sensor mounted in center for 8' fixtures

- ◆ 1 1/16" STEM MOUNTING K.O.
- ⊕ 2" K.O.
- ⊕ 7/8" K.O.

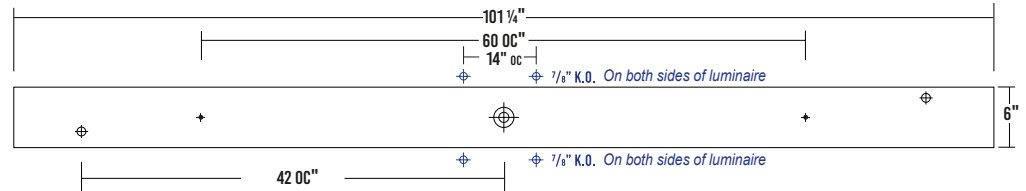

SPECIFICATIONS

CONSTRUCTION

- 22 gauge die formed cold-rolled steel housing with 18 gauge end plates
- Spot welded seams and corners
- Full neoprene gasket

FINISH

- Baked white powder coated finish
- Minimum reflectance 90%
- Welded and painted after fabrication

OPTICAL

- 25% "DR" high impact linear pattern frosted acrylic lens
- Lens secured by steel lens-retainers and two stainless steel knurled head thumb screws

ELECTRICAL

- High efficiency drivers coupled with long-life LEDs
- Service life tested at 50,000 hours (L70)
- Universal voltage 120V through 277V (347V / 480V available)
- Power Factor (PF) ≥ 0.9
- Total Harmonic Distortion (THD) ≤ 20%

LISTING

- UL USA and Canada listed
- Suitable for damp locations

WARRANTY

- 5-year limited warranty
- 10-year limited warranty available

APPLICATIONS

- Stairwells, Parking Structure, Passageways, Workrooms, Restrooms

FEATURES

- 0-10V Dimming driver standard
- Supports California Title 24 compliance

OPTIONS CONTACT CUSTOMER SERVICE FOR ADDITIONAL OPTIONS

- Wet location
- Controls
- Custom housing colors
- Phillips head screws / tamper proof screws
- Emergency battery pack
- Color Tunable white (2700K - 6500K)
- Customization available upon request
- 0.10" Frosted smooth polycarbonate lens for security applications

CUSTOM COLORS

BLK - Matte Black

CS - Camaro Silver

BZ - Statuary Bronze



Variety of RAL colors available upon request.



Los Angeles Lighting Mfg. Co.
Contact Us
T: 626-454-8300 10141 Olney Street
F: 626-454-8399 El Monte, CA 91731
www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2023 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 6/19/2024



MADE IN THE USA
BAA Compliant


ORDERING INFORMATION

ADDITIONAL OPTIONS AVAILABLE. VISIT WWW.LALIGHTING.COM/RESOURCES FOR MORE INFORMATION

EXAMPLE: WSE201-4-4L-TP-MS(LW)-BPL1.5-DRDM-UNV-1/840

SERIES	NOMINAL LED LUMENS	NOMINAL LENGTH	OPTICAL	COLOR	MECHANICAL	CONTROLS	ELECTRICAL	DRIVER	VOLTAGE	# OF LED ROW	CRI / CCT	
WSE201												
WSE201 • Wraparound Security High Impact Sensor Controlled	1 - 1000lm 2 - 2000lm 3 - 3000lm 4 - 4000lm 5 - 5000lm 6 - 6000lm High Efficacy 1HE - 1000lm 2HE - 2000lm 3HE - 3000lm	2L • 2ft	DRRLFR ¹ • Frosted Ribbed Acrylic FPC • Frosted Smooth Polycarbonate	(Blank) • Standard White BLK • Matte Black BZ • Statuary Bronze CS • Camaro Silver	(Blank) • Knurled Head Thumb Screw TP • Tamper Proof Screws • Hex Socket w/Post PH • Phillips Head Screws WL • Wet Location • Electro-Galvanized Steel Housing *Leave blank if not specified	MSPCD(W)(xx) • Motion Sensor & Photocell Dimming • Wet Location • Lens Option MSPC(W)(xx) • Motion Sensor & Photocell • Wet Location • Lens Option MSSD(W)(xx) • Motion Sensor Step Dimming (Bi-Level) • Wet Location • Lens Option MS(W)(xx) • Motion Sensor • Wet Location • Lens Option WLC(xx) • Wireless Control <i>Note: For no sensor, refer to WSE200.</i>	BPL1.5 • Emergency Battery Pack • 1500 lm C(xx) • Cord 18 ga. 3-wire • Plug Options • NEMA Plug Type • Length of Cord • Location on the fixture *Leave blank if not specified	DRDM • 0-10V Dimming Driver DRSD • Step Dimming Driver DR2W • 2-Wire Phase Dimming Driver • Requires Specific Voltage Callout	UNV • 120V-277V 120V • 120 Volt 277V • 277 Volt 347V • 347 Volt 480V • 480 Volt	1 • 1 LED Row	830 • 80+CRI / 3000K 835 • 80+CRI / 3500K 840 • 80+CRI / 4000K 850 • 80+CRI / 5000K 8TW • Tunable White 827 to 865	
	1 - 1000lm 2 - 2000lm 3 - 3000lm 4 - 4000lm 5 - 5000lm 6 - 6000lm	3L • 3ft										
	2 - 2000lm 3 - 3000lm 4 - 4000lm 6 - 6000lm 8 - 8000lm 10 - 10000lm 12 - 12000lm 16 - 16000lm High Efficacy 2HE - 2000lm 3HE - 3000lm 4HE - 4000lm 6HE - 6000lm	4L • 4ft										
	4 - 4000lm 6 - 6000lm 8 - 8000lm 12 - 12000lm 16 - 16000lm 20 - 20000lm 24 - 24000lm High Efficacy 4HE - 4000lm 6HE - 6000lm 8HE - 8000lm 12HE - 12000lm	8L • 8ft										
Standard options for WSE201 shown above. For additional options, including lumen packages, controls, lenses, switches, finishes, and more, visit www.lalighting.com/resources or contact customer service.												
¹ Blank lens callout in existing specification indicates DRRLFR												

PHOTOMETRIC DATA

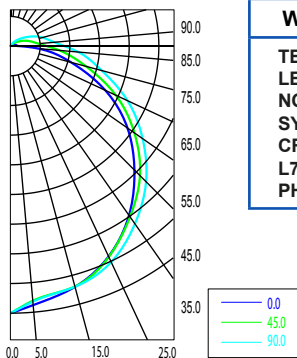

WSE201-4-4L-MS-DRDM-UNV-1/840
TEST NO. = LA-T3621
LED TYPE = 56 LED MODULE
NO. OF MODULE = 2
SYSTEM WATT (W) = 26.7
CRI ≥ 80
L70(Hrs.) ≥ 50,000
PHOTOMETRY TYPE = C

ZONAL LUMEN SUMMARY			
DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	905	22.2	24.4
0-40	1477	36.2	39.8
0-60	2717	64.1	70.6
0-90	3534	86.5	95.3
90-120	154	3.8	4.2
90-150	174	4.3	4.7
90-180	174	4.3	4.7
0-180	3708	90.8	100.0

SPACING CRITERION	
ALONG	ACROSS
1.23	1.26

Luminaire Output = 3708.52 lumens
 Luminaire Efficacy = 138.90 lm/W
 Luminaire Efficiency = 90.76%



Los Angeles Lighting Mfg. Co.
 Contact Us
 T: 626-454-8300
 F: 626-454-8399
www.lalighting.com
 10141 Olney Street
 El Monte, CA 91731
 Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2023 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 6/19/2024



SYSTEM DATA

ADDITIONAL LUMEN PACKAGES AVAILABLE. CONTACT CUSTOMER SERVICE FOR MORE INFORMATION

2' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	LUMINAIRE EFFICIENCY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
1000 Lumens (Nominal)	WSE201-1-2L-MS(xx)-DRDM-UNV-1/840	949	7.6	124.19 lm/W	91.13%	-20°C / 35°C (-4°F / 95°F)	1-F17T8	*
2000 Lumens (Nominal)	WSE201-2-2L-MS(xx)-DRDM-UNV-1/840	1862	14.1	131.81 lm/W	91.13%	-20°C / 35°C (-4°F / 95°F)	2-F17T8 1-F24T5HO	LA-T3618
3000 Lumens (Nominal)	WSE201-3-2L-MS(xx)-DRDM-UNV-1/840	2851	22.1	128.88 lm/W	91.13%	-20°C / 35°C (-4°F / 95°F)	3-F17T8	*
4000 Lumens (Nominal)	WSE201-4-2L-MS(xx)-DRDM-UNV-1/840	3774	27.3	138.37 lm/W	91.13%	-20°C / 35°C (-4°F / 95°F)	4-F17T8 2-F24T5HO	*
5000 Lumens (Nominal)	WSE201-5-2L-MS(xx)-DRDM-UNV-1/840	4617	32.7	141.40 lm/W	91.13%	-20°C / 35°C (-4°F / 95°F)	5-F17T8	*
6000 Lumens (Nominal)	WSE201-6-2L-MS(xx)-DRDM-UNV-1/840	5282	34.4	139.13 lm/W	91.13%	-20°C / 35°C (-4°F / 95°F)	6-F17T8 3-F24T5HO	*
8000 Lumens (Nominal)	WSE201-8-2L-MS(xx)-DRDM-UNV-1/840	7402	52.4	141.38 lm/W	90.76%	-20°C / 35°C (-4°F / 95°F)	4-F32T8 2-F54T5HO	*
2' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE (HIGH EFFICACY) PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	LUMINAIRE EFFICIENCY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
1000 Lumens (Nominal)	WSE201-1HE-2L-MS(xx)-DRDM-UNV-1/840	1025	7.5	136.70 lm/W	91.13%	-20°C / 35°C (-4°F / 95°F)	1-F17T8	*
2000 Lumens (Nominal)	WSE201-2HE-2L-MS(xx)-DRDM-UNV-1/840	1823	12.4	147.28 lm/W	91.13%	-20°C / 35°C (-4°F / 95°F)	2-F17T8 1-F24T5HO	*
3000 Lumens (Nominal)	WSE201-3HE-2L-MS(xx)-DRDM-UNV-1/840	2753	18.7	147.36 lm/W	91.13%	-20°C / 35°C (-4°F / 95°F)	3-F17T8	*
3' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	LUMINAIRE EFFICIENCY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
1000 Lumens (Nominal)	WSE201-1-3L-MS(xx)-DRDM-UNV-1/840	912	5.8	157.11 lm/W	90.92%	-20°C / 35°C (-4°F / 95°F)	-	*
2000 Lumens (Nominal)	WSE201-2-3L-MS(xx)-DRDM-UNV-1/840	1839	11.8	155.44 lm/W	90.92%	-20°C / 35°C (-4°F / 95°F)	1-F25T8	*
3000 Lumens (Nominal)	WSE201-3-3L-MS(xx)-DRDM-UNV-1/840	2727	17.8	152.92 lm/W	90.92%	-20°C / 35°C (-4°F / 95°F)	-	LA-T3619
4000 Lumens (Nominal)	WSE201-4-3L-MS(xx)-DRDM-UNV-1/840	3850	25.6	150.12 lm/W	90.92%	-20°C / 35°C (-4°F / 95°F)	2-F25T8	LA-T3624
5000 Lumens (Nominal)	WSE201-5-3L-MS(xx)-DRDM-UNV-1/840	4645	31.4	147.96 lm/W	90.92%	-20°C / 35°C (-4°F / 95°F)	-	*
6000 Lumens (Nominal)	WSE201-6-3L-MS(xx)-DRDM-UNV-1/840	5646	39.1	144.49 lm/W	90.92%	-20°C / 35°C (-4°F / 95°F)	3-F25T8	*
4' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	LUMINAIRE EFFICIENCY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
2000 Lumens (Nominal)	WSE201-2-4L-MS(xx)-DRDM-UNV-1/840	1889	13.4	140.78 lm/W	90.76%	-20°C / 35°C (-4°F / 95°F)	1-F32T8	*
3000 Lumens (Nominal)	WSE201-3-4L-MS(xx)-DRDM-UNV-1/840	2991	22.1	135.35 lm/W	90.76%	-20°C / 35°C (-4°F / 95°F)	-	*
4000 Lumens (Nominal)	WSE201-4-4L-MS(xx)-DRDM-UNV-1/840	3708	26.7	138.85 lm/W	90.76%	-20°C / 35°C (-4°F / 95°F)	2-F32T8 1-F54T5HO	LA-T3621
6000 Lumens (Nominal)	WSE201-6-4L-MS(xx)-DRDM-UNV-1/840	5774	43.7	132.22 lm/W	90.76%	-20°C / 35°C (-4°F / 95°F)	3-F32T8	*
8000 Lumens (Nominal)	WSE201-8-4L-MS(xx)-DRDM-UNV-1/840	7516	51.1	146.98 lm/W	90.76%	-20°C / 35°C (-4°F / 95°F)	4-F32T8 2-F54T5HO	*
10000 Lumens (Nominal)	WSE201-10-4L-MS(xx)-DRDM-UNV-1/840	9195	61.4	149.8 lm/W	90.76%	-20°C / 35°C (-4°F / 95°F)	5-F32T8	*
12000 Lumens (Nominal)	WSE201-12-4L-MS(xx)-DRDM-UNV-1/840	10919	74.9	145.75 lm/W	90.76%	-20°C / 35°C (-4°F / 95°F)	6-F32T8 3-F54T5HO	*
16000 Lumens (Nominal)	WSE201-16-4L-MS(xx)-DRDM-UNV-1/840	14741	97.9	150.55 lm/W	90.76%	-20°C / 35°C (-4°F / 95°F)	8-F32T8 4-F54T5HO	*

NOTE:
 System data is based on 120V input voltage. Actual performance may differ as a result of end-user environment and application.
 This fixture has been tested and listed in accordance with UL Standards. L.A. Lighting certifies that it will operate safely when installed properly, and within an ambient temperature range noted in the system data table.
 Additional lumen packages and color temperatures available.



Los Angeles Lighting Mfg. Co.
 Contact Us
 T: 626-454-8300 10141 Olney Street
 F: 626-454-8399 El Monte, CA 91731
 www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2023 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 6/19/2024



MADE IN THE USA
 BAA Compliant

SYSTEM DATA

ADDITIONAL LUMEN PACKAGES AVAILABLE. CONTACT CUSTOMER SERVICE FOR MORE INFORMATION

4" - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE (HIGH EFFICACY) PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	LUMINAIRE EFFICIENCY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
2000 Lumens (Nominal)	WSE201-2HE-4L-MS(xx)-DRDM-UNV-1/840	2042	13.5	150.76 lm/W	90.76%	-20°C / 35°C (-4°F / 95°F)	1-F32T8	*
3000 Lumens (Nominal)	WSE201-3HE-4L-MS(xx)-DRDM-UNV-1/840	2848	18.3	155.50 lm/W	90.76%	-20°C / 35°C (-4°F / 95°F)	-	*
4000 Lumens (Nominal)	WSE201-4HE-4L-MS(xx)-DRDM-UNV-1/840	3630	23.5	154.78 lm/W	90.76%	-20°C / 35°C (-4°F / 95°F)	2-F32T8 1-F54T5HO	*
6000 Lumens (Nominal)	WSE201-6HE-4L-MS(xx)-DRDM-UNV-1/840	5484	36.4	150.68 lm/W	90.76%	-20°C / 35°C (-4°F / 95°F)	3-F32T8	*
8" - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE (HIGH EFFICACY) PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	LUMINAIRE EFFICIENCY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
4000 Lumens (Nominal)	WSE201-4-8L-MS(xx)-DRDM-UNV-1/840	3673	25.8	142.54 lm/W	88.25%	-20°C / 35°C (-4°F / 95°F)	3-F32T8	*
6000 Lumens (Nominal)	WSE201-6-8L-MS(xx)-DRDM-UNV-1/840	5464	39.0	140.27 lm/W	88.25%	-20°C / 35°C (-4°F / 95°F)	3-F32T8	*
8000 Lumens (Nominal)	WSE201-8-8L-MS(xx)-DRDM-UNV-1/840	7212	52.7	136.91 lm/W	88.25%	-20°C / 35°C (-4°F / 95°F)	4-F32T8 2-F54T5HO	LA-T3622
12000 Lumens (Nominal)	WSE201-12-8L-MS(xx)-DRDM-UNV-1/840	10905	81.9	133.11 lm/W	88.25%	-20°C / 35°C (-4°F / 95°F)	6-F32T8 3-F54T5HO	*
16000 Lumens (Nominal)	WSE201-16-8L-MS(xx)-DRDM-UNV-1/840	14303	99.2	144.21 lm/W	88.25%	-20°C / 35°C (-4°F / 95°F)	8-F32T8 4-F54T5HO	*
20000 Lumens (Nominal)	WSE201-20-8L-MS(xx)-DRDM-UNV-1/840	17881	123.0	145.4 lm/W	88.25%	-20°C / 35°C (-4°F / 95°F)	-	*
24000 Lumens (Nominal)	WSE201-24-8L-MS(xx)-DRDM-UNV-1/840	21234	142.2	142.3 lm/W	88.25%	-20°C / 35°C (-4°F / 95°F)	6-F54T5HO 400W MH	*
8" - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE (HIGH EFFICACY) PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	LUMINAIRE EFFICIENCY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
4000 Lumens (Nominal)	WSE201-4HE-8L-MS(xx)-DRDM-UNV-1/840	3753	22.7	157.13 lm/W	88.25%	-20°C / 35°C (-4°F / 95°F)	2-F32T8	*
6000 Lumens (Nominal)	WSE201-6HE-8L-MS(xx)-DRDM-UNV-1/840	5538	35.4	156.27 lm/W	88.25%	-20°C / 35°C (-4°F / 95°F)	3-F32T8	*
8000 Lumens (Nominal)	WSE201-8HE-8L-MS(xx)-DRDM-UNV-1/840	7059	45.3	155.88 lm/W	88.25%	-20°C / 35°C (-4°F / 95°F)	4-F32T8 2-F54T5HO	*
12000 Lumens (Nominal)	WSE201-12HE-8L-MS(xx)-DRDM-UNV-1/840	10664	71.1	149.91 lm/W	88.25%	-20°C / 35°C (-4°F / 95°F)	6-F32T8 3-F54T5HO	*


NOTE:
System data is based on 120V input voltage. Actual performance may differ as a result of end-user environment and application.
This fixture has been tested and listed in accordance with UL Standards. L.A. Lighting certifies that it will operate safely when installed properly, and within an ambient temperature range noted in the system data table.
Additional lumen packages and color temperatures available.

MOUNTING ACCESSORIES

45° MOUNTING BRACKET


45MB

- 45° mounting bracket designed for mounting lighting fixtures at 45° angle
- Ideal for wall or ceiling mount applications
- 18 ga. electro-galvanized steel
- Baked white powder coated finish
- Two mounting brackets required for each 2' 4", pr 8' luminaire

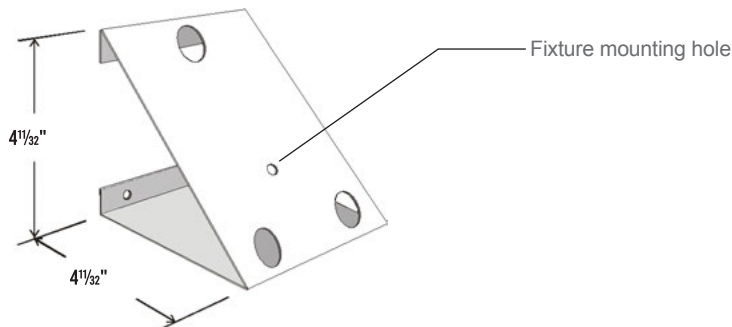

Note: Must drill own holes for 45° mounting bracket

Ceiling Mount

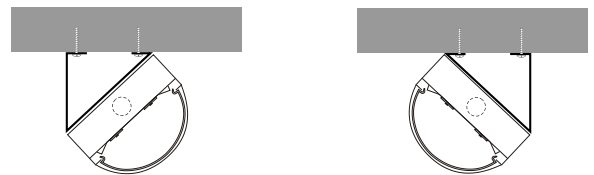

Wall Mount



Los Angeles Lighting Mfg. Co.

Contact Us
T: 626-454-8300 10141 Olney Street
F: 626-454-8399 El Monte, CA 91731
www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2023 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 6/19/2024




MOUNTING ACCESSORIES


STEM (Length)

- 3/8" IPS, nominal OD 5/8"
- Threaded 1" each end
- 2 lock nuts provided per stem
- Standard lengths: 6", 12", 18", 24", 30", 36", 48"

Note: other lengths & finishes are available as specified

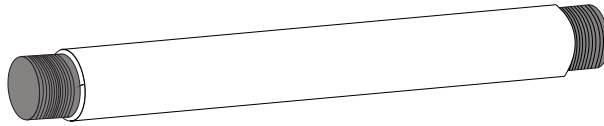


Stem Length Calculation

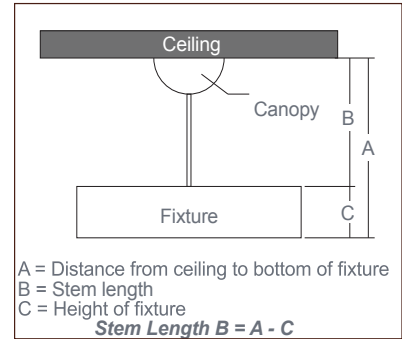

CANOPY / CABLE SUSPENSION SYSTEM

- Self-locking, one-step adjustable suspension device with canopies
- Provides full 360° rotation



433B

- Canopy with cable
- No power cord
- Cable length 48" and 96"
- Max. weight 196 lbs.


443B-48 W

COLOR

- W - White
- B - Black

CABLE LENGTH

- 48 - 48 inches
- 96 - 96 inches
- (Other lengths as specified)



444F

- Feed-in canopy with straight cord
- Includes power cord
- Cable length 48" and 96"
- Max. weight 196 lbs

444F-48SW-2C

OF CIRCUITS

- 2C - Two circuits
- LV - 0-10V dimming
- Blank - One circuit

COLOR

- W - White
- B - Black

CORD TYPE

- S - Straight cord

CABLE LENGTH

- 48 - 48 inches
- 96 - 96 inches
- (Other lengths as specified)

MECHANICAL OPTIONS

KNURLED HEAD THUMB SCREWS

Standard

- Stainless steel knurled head thumb screws



TAMPER PROOF SCREWS

TP

- Hex Pin Stainless Steel Tamper Proof Screws



Los Angeles Lighting Mfg. Co.

Contact Us

T: 626-454-8300

F: 626-454-8399

www.lalighting.com

10141 Olney Street

El Monte, CA 91731

Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2023 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 6/19/2024



MADE IN THE USA
BAA Compliant