



WRAPAROUND

COR 100

SERIES 2FT, 4FT, 8FT
LED SQUARE CORRIDOR WRAPAROUND LUMINAIRE

JOB	
TYPE	
DATE	

LALIGHTING.COM 626-454-8300

SUSPENSION / SURFACE MOUNTED LED LUMINAIRE



APPLICATIONS

- Commercial, Corridor, Wall

FEATURES

- 0-10V Dimming driver standard
- Suitable for damp locations
- Supports California Title 24 compliance

OPTIONS

- Controls
- Plug-In branch wiring connector system
- Cord & plug
- Emergency battery pack
- Customization available upon request

SPECIFICATIONS

CONSTRUCTION

- 22 ga. cold rolled steel welded housing

FINISH

- Baked white powder coated finish / minimum reflectance 90%
- Painted after fabrication

OPTICAL

- Clear prismatic acrylic lens
- 15% impact resistant "DR" formulation
- Injection molded ends of lens / diffuser, lens secured to housing by torsion springs

ELECTRICAL

- High efficiency drivers coupled with long-life LEDs
- Service life tested at 50,000 hours (L70)
- Universal voltage 120V through 277V (347V / 480V available)
- Power Factor (PF) ≥ 0.9
- Total Harmonic Distortion (THD) $\leq 20\%$

LISTING

- UL USA and Canada listed / suitable for damp locations

WARRANTY

- 5-year limited warranty
- 10-year limited warranty available



Los Angeles Lighting Mfg. Co.
Contact Us
T: 626-454-8300 10141 Olney Street
F: 626-454-8399 El Monte, CA 91731
www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2022 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 07/31/23



MADE IN THE USA
BAA Compliant

ORDERING INFORMATION

EXAMPLE: COR100-4-4L-PA-BPL1.5-DRDM-UNV-1/840

SERIES	NOMINAL LED LUMENS	EFFICACY	NOMINAL LENGTH	COLOR	OPTICAL	CONTROLS	ELECTRICAL	DRIVER	VOLTAGE	# OF LED ROW	CRI / CCT
COR100 • Square Corridor Wraparound LED Luminaire	2ft 1 - 1000lm 2 - 2000lm 3 - 3000lm 4 - 4000lm	(Blank) • Standard HE • High Efficacy	2L • 2ft 3L • 3ft 4L • 4ft 8L • 8ft	(Blank) • Standard White BLK • Matte Black BZ • Statuary Bronze CS • Camaro Silver	PA • Clear Prismatic Acrylic Lens	MSPCD(xx) • Motion Sensor & Photocell Dimming (Lens Option) MSPC(xx) • Motion Sensor & Photocell (Lens Option) MS(xx) • Motion Sensor WLC(xx) • Wireless Control	BPL1.5 • Emergency Battery Pack • 1500 lm PIW(xx) • Plug-in Branch Wiring Connector • One or Two Circuit • Low Voltage Dimming C(xx) • Cord 18 ga. 3-wire • Plug Options • NEMA Plug Type • Length of Cord • Location on the fixture	DRDM • 0-10V Dimming Driver DRSD • Step Dimming Driver DR2W • 2-Wire Phase Dimming Driver • Requires Specific Voltage Callout	UNV • 120V-277V 120V • 120 Volt 277V • 277 Volt 347V • 347 Volt 480V • 480 Volt	1 • 1 LED Row	830 • 80+CRI / 3000K 835 • 80+CRI / 3500K 840 • 80+CRI / 4000K 850 • 80+CRI / 5000K 8TW • Tunable White 827 to 865 • Contact factory regarding lumen packages *Consult factory for available additional options for CRI & CCT
	3ft 2 - 2000lm 4 - 4000lm 6 - 6000lm 8 - 8000lm 4ft 2 - 2000lm 4 - 4000lm 6 - 6000lm 8 - 8000lm 8ft 4 - 4000lm 8 - 8000lm 12 - 12000lm 16 - 16000lm Contact factory for additional lumen packages	HE Packages 2ft • 1000lm • 2000lm • 3000lm 4ft • 2000lm • 4000lm • 6000lm 8ft • 4000lm • 8000lm • 12000lm	*Contact factory for additional length options *Consult factory for available RAL options	*Contact factory for additional electrical options *Leave blank if not specified	*Contact factory for additional driver options	*Consult factory for additional options for CRI & CCT					

CUSTOM COLORS

BLK - Matte Black


CS - Camaro Silver

BZ - Statuary Bronze





Variety of RAL colors available upon request.



DIMENSIONS



◆ 1 1/16" Stem Mtg. K.O.
⊕ 2" K.O.
⊕ 7/8" K.O. on side of housing

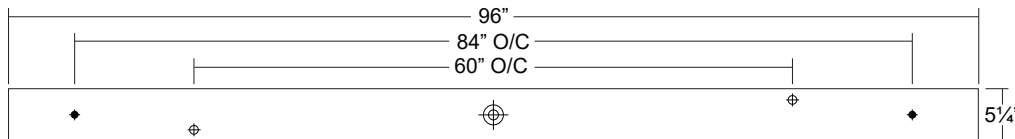

Los Angeles Lighting Mfg. Co.
Contact Us
T: 626-454-8300
F: 626-454-8399
www.lalighting.com
10141 Olney Street
El Monte, CA 91731
Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2022 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 07/31/23



MADE IN THE USA
BAA Compliant

SYSTEM DATA THESE ARE THE MOST POPULAR LUMEN PACKAGES. PLEASE CONSULT FACTORY FOR ADDITIONAL SYSTEM DATA.

2' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	LUMINAIRE EFFICIENCY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
1000 Lumens (Nominal)	COR100-1-2L-PA-DRDM-UNV-1/840	944	9.2	102.6 lm/W	87.63%	-20°C / 35°C (-4°F / 95°F)	1-F17T8	LA-T2689
2000 Lumens (Nominal)	COR100-2-2L-PA-DRDM-UNV-1/840	1876	16.7	112.3 lm/W	87.63%	-20°C / 35°C (-4°F / 95°F)	2-F17T8 1-F24T5HO	LA-T2690
3000 Lumens (Nominal)	COR100-3-2L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	3-F17T8	*
4000 Lumens (Nominal)	COR100-4-2L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	4-F17T8 2-F24T5HO	*
2' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE (HIGH EFFICACY) PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	LUMINAIRE EFFICIENCY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
1000 Lumens (Nominal)	COR100-1HE-2L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	1-F17T8	*
2000 Lumens (Nominal)	COR100-2HE-2L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	2-F17T8 1-F24T5HO	*
3000 Lumens (Nominal)	COR100-3HE-2L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	3-F17T8	*
3' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	LUMINAIRE EFFICIENCY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
2000 Lumens (Nominal)	COR100-2-3L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)		*
4000 Lumens (Nominal)	COR100-4-3L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)		*
6000 Lumens (Nominal)	COR100-6-3L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)		*
8000 Lumens (Nominal)	COR100-8-3L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)		*
4' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	LUMINAIRE EFFICIENCY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
2000 Lumens (Nominal)	COR100-2-4L-PA-DRDM-UNV-1/840	1910	17.8	107.3 lm/W	88.64%	-20°C / 35°C (-4°F / 95°F)	1-F32T8	LA-T2691
4000 Lumens (Nominal)	COR100-4-4L-PA-DRDM-UNV-1/840	3616	34.7	104.2 lm/W	88.64%	-20°C / 35°C (-4°F / 95°F)	2-F32T8 1-F54T5HO	LA-T2692
6000 Lumens (Nominal)	COR100-6-4L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	3-F32T8	*
8000 Lumens (Nominal)	COR100-8-4L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	4-F32T8 2-F54T5HO	*
4' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE (HIGH EFFICACY) PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	LUMINAIRE EFFICIENCY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
2000 Lumens (Nominal)	COR100-2HE-4L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	1-F32T8	*
4000 Lumens (Nominal)	COR100-4HE-4L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	2-F32T8 1-F54T5HO	*
6000 Lumens (Nominal)	COR100-6HE-4L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	3-F32T8	*
8' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	LUMINAIRE EFFICIENCY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
4000 Lumens (Nominal)	COR100-4-8L-PA-DRDM-UNV-1/840	3835	33.1	115.9 lm/W	89.01%	-20°C / 35°C (-4°F / 95°F)	3-F32T8	LA-T2693
8000 Lumens (Nominal)	COR100-8-8L-PA-DRDM-UNV-1/840	7263	68.1	106.7 lm/W	89.01%	-20°C / 35°C (-4°F / 95°F)	4-F32T8 2-F54T5HO	LA-T2694
12000 Lumens (Nominal)	COR100-12-8L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	6-F32T8 3-F54T5HO	*
16000 Lumens (Nominal)	COR100-16-8L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	8-F32T8 4-F54T5HO	*



Los Angeles Lighting Mfg. Co.
 Contact Us
 T: 626-454-8300 10141 Olney Street
 F: 626-454-8399 El Monte, CA 91731
 www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2022 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 07/31/23



MADE IN THE USA
BAA Compliant

SYSTEM DATA THESE ARE THE MOST POPULAR LUMEN PACKAGES. PLEASE CONSULT FACTORY FOR ADDITIONAL SYSTEM DATA.

8' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE (HIGH EFFICACY) PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	LUMINAIRE EFFICIENCY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
4000 Lumens (Nominal)	COR100-4HE-8L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	2-F32T8	*
6000 Lumens (Nominal)	COR100-8HE-8L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	3-F32T8	*
8000 Lumens (Nominal)	COR100-12HE-8L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	4-F32T8 2-F54T5HO	*
12000 Lumens (Nominal)	COR100-16HE-8L-PA-DRDM-UNV-1/840	-	-	-	-	-20°C / 35°C (-4°F / 95°F)	6-F32T8 3-F54T5HO	*

NOTE:

System data is based on 120V input voltage. Actual performance may differ as a result of end-user environment and application.

This fixture has been tested and listed in accordance with UL Standards. L.A. Lighting certifies that it will operate safely when installed properly, and within an ambient temperature range noted in the system data table. Additional lumen packages and color temperatures available.



Los Angeles Lighting Mfg. Co.
 Contact Us
 T: 626-454-8300 10141 Olney Street
 F: 626-454-8399 El Monte, CA 91731
 www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2022 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 07/31/23



MADE IN THE USA
BAA Compliant

CONTROL OPTIONS**WLC(LED RU) - EnOcean® LED Relay Zone Controller**

- Supports a single LED fixture or multiple daisy chained LED fixtures
- Module installed inside lighting fixture

ESRPU-W-EO - EnOcean® Rocker Switch – Single – Surface Mount

- Wireless single rocker switch with mounting plate
- No batteries needed

EDRPU-W-EO - EnOcean® Rocker Switch – Double – Surface Mount

- Wireless double rocker switch with mounting plate
- No batteries needed

S3054-N300 - EnOcean® Navigan NWC 300U – Commissioning Tool

- Navigan Wireless Commissioner is used to configure EnOcean controllers & sensors
- It can be used to define link tables, change parameters/settings, & to edit & store projects
- Configuration settings can be saved & cloned to enable quick configuration
- Connectivity is through the NWC 300U USB Stick

EOSWU-W-EO - EnOcean® Occupancy Sensor – Wall Mount

- Wireless wall mounted occupancy sensor
- Solar powered - no batteries needed (coin battery operated in low light conditions)
- PIR motion sensor with both wide angle (50ft) and long range (100ft) options
- Mounting height: 6-8ft

EOSCU-W-EO - EnOcean® Occupancy Sensor – Ceiling Mount

- Wireless ceiling mounted occupancy sensor
- Solar powered - no batteries needed (coin battery operated in low light conditions)
- PIR motion sensor with 360° viewing angle lens (34' diameter)
- Mounting height: 7-10ft

ELLSU-W-EO - EnOcean® Light Level Sensor – Ceiling Mount

- Light Level sensor that measures and reports the level of available natural light
- Solar powered - no batteries needed (coin battery operated in low light conditions)
- Enables implementation of daylight harvesting control systems
- Mounting position: At the ceiling, close to ambient light source

**Los Angeles Lighting Mfg. Co.**

Contact Us
 T: 626-454-8300 10141 Olney Street
 F: 626-454-8399 El Monte, CA 91731
 www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2022 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 04/15/21

MADE IN THE USA
BAA Compliant

DRIVER OPTIONS

BATTERY PACK OPTIONS

BACK TO TOP

PLEASE CONSULT FACTORY TO SEE IF YOUR SELECTED
DRIVER OPTION WORKS WITH THIS FIXTURE

PLEASE CONSULT FACTORY TO SEE IF YOUR SELECTED
BATTERY OPTION WORKS WITH THIS FIXTURE

LED EMERGENCY BATTERY PACKS
(Operates for 90 minutes unless otherwise specified)

DRDM () () UNV

NOTE

120V	120 Volt
277V	277 Volt
UNV	Universal 120-277V *Normal Stock Item
347V	347 Volt
480V	480 Volt

SPECIFIC DRIVER MFG

(XXX) Manufacturer's Name/Part Number

WARRANTY

(Blank) 5-Year Limited Warranty - Standard
TY 10-Year Limited Warranty
Lighting fixtures with ten year limited warranty if specified

DRIVER TYPE

DRDM	0-10V Dimming Driver *Normal Stock Item
DRDM1	0-10V Dimming Driver, 1% Dimming
DRDM2C	2-Channel 0-10V Dimming Driver (for Color Tunable White)
DR2W	2-Wire Phase Dimming Driver (TRIAC, Mark 10)
DRDA	Digital Addressable DALI Dimming Driver
DRDA2C	Digital Addressable DALI Type 8, 2-Channel Driver (for Color Tunable White)
DRDA2.0	Digital Addressable DALI 2.0 Dimming
DRDA2.02C	Digital Addressable DALI 2.0 Type 8, 2-Channel Driver (for Color Tunable White)
DRSD	Step Dimming
DR(LTEA2W)	Lutron® 2-Wire, 1% Dimming Driver (120V Forward Phase only)
DR(LED1)	Lutron® Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black Dimming
DR(L3DAE)	Lutron® Hi-Lume 1% EcoSystem
DR(L3DA3W)	Lutron® Hi-Lume 1% 3-wire
DR(PEQ0E)	Lutron® EcoSystem 0.1% Soft-On, Fade-to-Black Dimming Driver
DR(PSQ02U)	Lutron® T-Series Digital 1% Dimming 2-Channel Driver (for Color Tunable White)
DRCR	Control Ready
DRCR(DXL)	Osram Dexal
DRCR(SR)	Signify Sensor Ready

BPL 1.5 (2H)

NOTE

2H 2 Hours

LUMEN PACKAGE

0.7	Nominal 750 Lumens
1.5	Nominal 1500 Lumens *Normal Stock Item
3.0	Nominal 3000 Lumens
4.0	Nominal 4000 Lumens <i>(Additional lumen packages available)</i>

TYPE

(Blank)	Normal Ambient Temp. / Standard Operation
C	Cold Environment (-20°C)
SL	Slim Casing
ST	Self Test / Diagnostic



Los Angeles Lighting Mfg. Co.
Contact Us
T: 626-454-8300 10141 Olney Street
F: 626-454-8399 El Monte, CA 91731
www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2022 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.


Revised: 07/31/23

MADE IN THE USA
BAA Compliant


ELECTRICAL

PLUG-IN BRANCH WIRING CONNECTOR SYSTEM, LOW VOLTAGE FOR DIMMING

- For wiring lighting fixtures through fixture channel in single or multiple circuits by means of terminal disconnect plugs
- Low-Voltage for dimming
- 12 ga. wire supplied
- Specific configurations for multiple circuits supplied as specified

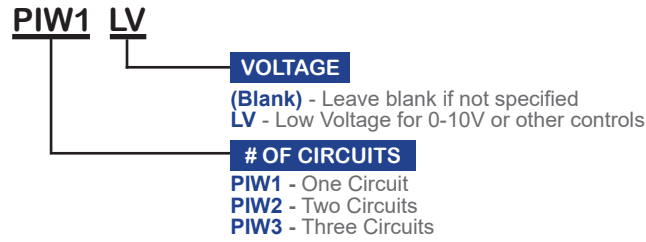

CORD & PLUG

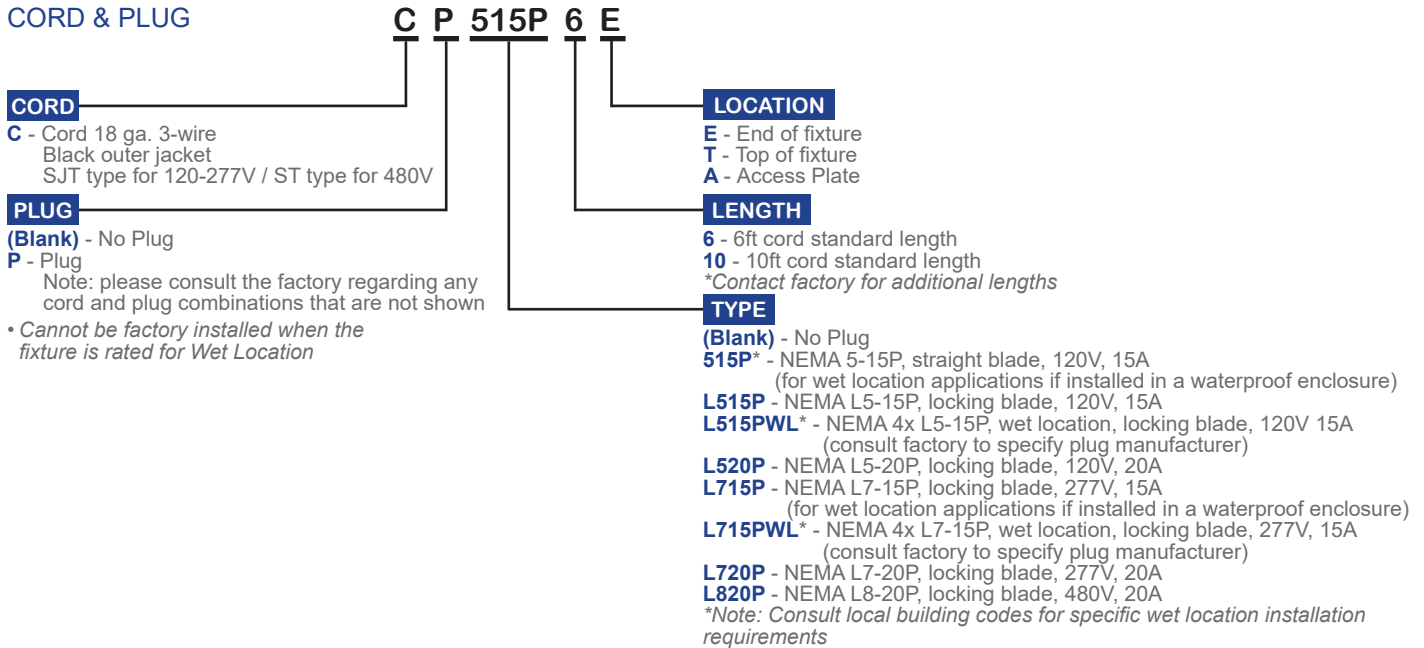

Los Angeles Lighting Mfg. Co.
 Contact Us
 T: 626-454-8300 10141 Olney Street
 F: 626-454-8399 El Monte, CA 91731
 www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2022 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 07/31/23




MADE IN THE USA
 BAA Compliant

MOUNTING ACCESSORIES

CANOPY SUSPENSION

- Ball action joint provides a full circumferential 45° swivel action
- Canopy bowls turn-lock onto bracket
- Baked white enamel (other finishes available as specified)
- Minimum one (1) of each per fixture

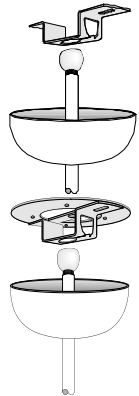


565 (Non-Feed Version)

- Includes
 - Mounting bracket
 - Turn-lock canopy bowl
 - Ball action joint

575 (Feed Version)

- Includes
 - Flash plate
 - Mounting bracket
 - Turn-lock canopy bowl
 - Ball action joint

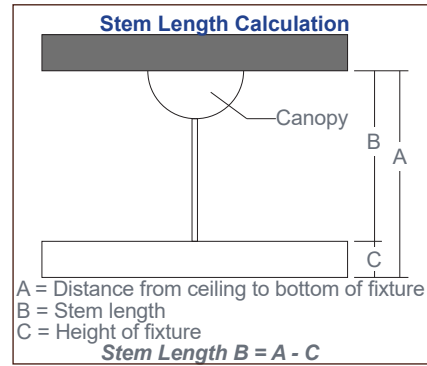


Note: Stem conduit is specified and sold as an additional line item

565 (Non-Feed Version)

- Minimum stem length is 12"
- Maximum weight is 50lbs per stem

575 (Feed Version)

- Minimum stem length is 6"
- Maximum weight is 20lbs per stem
- Maximum weight is 50lbs per stem for lengths 12" and longer




STEM(Length)

- 3/8" IPS, nominal OD 5/8"
- Threaded 1" each end
- 2 lock nuts provided per stem
- Standard lengths: 6", 12", 18", 24", 30", 36", 48"
- Baked white enamel finish

Note: other lengths & finishes are available as specified

CANOPY / CABLE SUSPENSION SYSTEM

- Self-locking, one-step adjustable suspension device with canopies
- Provides a full circumferential 360° swivel action



433B

- Blank canopy with cable
- No power cord
- Cable length 48" and 96"
- Max. weight 196 lbs. per set

443B-48 W

COLOR

- W - White
- B - Black

CABLE LENGTH

- 48 - 48 inches
- 96 - 96 inches
- (Other lengths as specified)



444F

- Feed-in canopy with straight cord
- Includes power cord
- Cable length 48" and 96"
- Max. weight 196 lbs per set

444F-48SW-2C

OF CIRCUITS

- 2C - Two circuits
- LV - 0-10V dimming (Leave blank for one circuit)

COLOR

- W - White
- B - Black

CORD TYPE

- S - Straight cord

CABLE LENGTH

- 48 - 48 inches
- 96 - 96 inches
- (Other lengths as specified)


PHOTOMETRIC DATA

COR100-4-4L-PA-DRDM-UNV-1/840

TEST NO. = LA-T2692
 LED TYPE = 32 LED MODULE
 NO. OF MODULE = 2
 SYSTEM WATT (W) = 34.7
 CRI ≥ 80
 L70(Hrs.) ≥ 50,000
 PHOTOMETRY TYPE = C

SPACING CRITERION

ALONG	ACROSS
1.21	1.10



ZONAL LUMEN SUMMARY

DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	1231	30.2	34.0
0-40	1857	45.4	51.4
0-60	2630	64.5	72.7
0-90	3329	81.6	92.1
90-120	219	5.4	6.1
90-150	284	7.0	7.9
90-180	287	7.0	7.9
0-180	3616	88.6	100.0

Luminaire Output = 3616.4 lumens
 Luminaire Efficacy = 104.22 lm/W
 Luminaire Efficiency = 88.64%



Los Angeles Lighting Mfg. Co.
 Contact Us
 T: 626-454-8300 10141 Olney Street
 F: 626-454-8399 El Monte, CA 91731
 www.lalighting.com Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2022 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 07/31/23



MADE IN THE USA
 BAA Compliant