



JOB	
TYPE	
DATE	

RECESSED PARABOLIC TROFFER FOR T-BAR CEILINGS

DIMENSIONS




T-BAR DIMENSIONS




S9 CROSS SECTION

BACKPLATE



→ ◆ ACCESS PLATE **7**/8" OFFSET K.O.

S9 LOUVER CONFIGURATION (3 LOUVER ROWS, 9 CELLS)



SPECIFICATIONS

- 22 gauge cold-rolled steel housing
- · Semi-specular, low iridescent aluminum louvers
- Louvers secured to housing with T-hinges and latches

- · Baked white polyester finish
- Minimum reflectance 86%

OPTICAL

• Nominal 3" deep aluminum parabolic louvers

• UL USA and Canada Listed. Compatible with UL Fire-Rated Ceiling Assemblies.

WARRANTY

• 5-Year limited warranty standard. 10-Year limited warranty also available

APPLICATIONS

· Classrooms, Offices, Retail

FEATURES

Recessed grid-mounted luminaire for T-bar ceilings

OPTIONS CONTACT CUSTOMER SERVICE FOR ADDITIONAL OPTIONS

- · Emergency battery packs
- 20 gauge housing
- · Sensors and controls
- White louvers
- · Customization available upon request



Los Angeles Lighting Mfg. Co.

Contact Us T: 626-454-8300 F: 626-454-8399

10141 Olney Street El Monte, CA 91731 Made in the USA






Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice Please visit our website to view the most current information.

Revised: 02/07/24



ORDERING INFORMATION

ADDITIONAL OPTIONS AVAILABLE. VISIT WWW.LALIGHTING.COM/RESOURCES FOR MORE INFORMATION FLUORESCENT PRODUCT PART # NOMENCLATURE

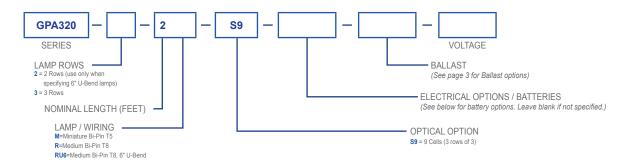

BATTERY PACK OPTIONS

FLUORESCENT EMERGENCY BATTERY PACKS (Minimum 90-minute operation) **BATTERY PACK REFERENCE CHART**

To determine the suffix used when ordering (either BP1, BP5, or BP5B), first find your lamp type, length, and number of lamps required in emergency mode, then select your desired lumen output.

	Emergency Output			
Lamp Type	Length	# Of Lamps in EM Mode	500lm	1400lm
F14T5	2ft	1	BP1	BP5
F14T5	2ft	2		BP5B
F24T5HO	2ft	1	BP1	BP5
F24T5HO	2ft	2		BP5B
F17T8	2ft	1	BP1	BP5
F17T8	2ft	2		BP5B










FLUORESCENT BALLAST OPTIONS

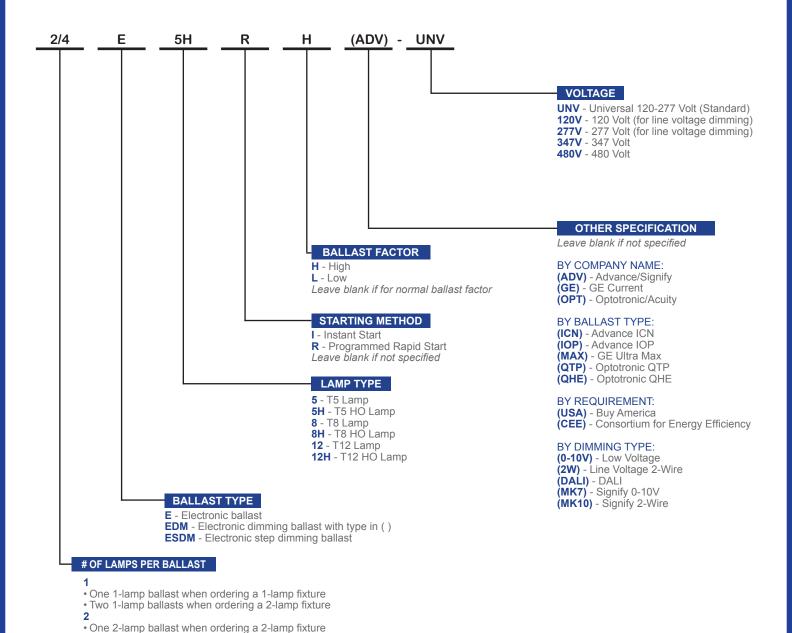

· For luminaires running three or more type T5, T5HO (2ft), T5HO (3ft), T8HO, or T8 Slimline lamps, more than one ballast is required.

Contact L.A. Lighting Customer Service for more information.



Los Angeles Lighting Mfg. Co.

Contact Us T: 626-454-8300 F: 626-454-8399 www.lalighting.com

1/2

10141 Olney Street El Monte, CA 91731 Made in the USA ROHS

• Two 2-lamp ballasts when ordering a 4-lamp fixture • One 3-lamp ballast when ordering a 3-lamp fixture • Two 3-lamp ballasts when ordering a 6-lamp fixture

• One 4-lamp ballast when ordering a 4-lamp fixture

• Two 4-lamp ballasts when ordering an 8-lamp fixture

• One 1-lamp ballast and one 2-lamp ballast for a 3-lamp fixture

· One 2-lamp ballast and one 4-lamp ballast for a 6-lamp fixture









MADE IN THE USA

BAA Compliant