

# The Evolution Series

## MEV110/115

### Commercial / Retail Warehouse

1, 2, 3 or 4 Lamps 28W T5 / 54W T5HO



Luminaire Efficiency  
**91.4%**



#### FEATURES

- T-Hinge and spring loaded latch door assembly.
- Clear linear prismatic acrylic lens.
- Enhanced specular enhanced aluminum reflector, 95% reflectance.
- Stem, cable, and chain mountable.
- Quarter turn rotary locking sockets.
- Baked white polyester finish.
- Electronic ballast, universal voltage. (120v / 277v, 320v/480v)


#### AVAILABLE WITH

- Opal lens
- Special ballast
- Die cast hub for 3/4" pipe mounting
- Steel safety cable
- White aluminum reflector
- Occupancy sensor
- Cord and plug
- Custom colors



#### MEV110-2-4M-C/LP-SR-E5

TEST NO.=LA-T1575  
LAMP TYPE=F28T5  
NO. OF LAMP=2  
LUMENS PER LAMP=2900  
WATTS PER LAMP=28  
BALLAST FACTOR=1  
PHOTOMETRY TYPE=C

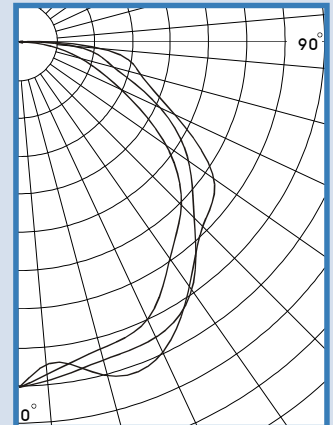

#### CANDLEPOWER

Angle	End	45	Cross
0	1592	1592	1592
5	1536	1565	1491
15	1463	1516	1593
25	1408	1500	1575
35	1216	1391	1372
45	1060	1143	1200
55	828	955	1098
65	522	721	794
75	298	454	582
85	103	281	399
90	24	102	163
95	13	6	14
105	17	2	1
115	8	2	0
125	1	1	0
135	0	0	0
145	0	0	0
155	0	0	0
165	0	0	0
175	0	0	0
180	0	0	0

#### ZONAL LUMEN SUMMARY

DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	1271	21.9	24.0
0-40	2114	36.5	39.9
0-60	3855	66.5	72.7
0-90	5256	90.6	99.2
90-120	43	0.7	0.8
90-130	44	0.8	0.8
90-150	44	0.8	0.8
90-180	44	0.8	0.8
0-180	5300	91.4	100.0

Luminaire Efficiency = 91.4%

#### SPACING CRITERION

ALONG	ACROSS
1.22	1.34



**LOS ANGELES LIGHTING MFG. CO.**

10141 OLNEY ST. / EL MONTE, CA 91731

<http://www.lalighting.com>

TEL : 626-454-8300 FAX : 626-454-8399

