

THE BAYLIGHTER™

SRGBL220

The Baylighter™, General Area

40w, 50w, 55w Biax® Lamp



FEATURES


- T-Hinge and spring loaded latch door assembly.
- Clear prismatic acrylic lens.
- Removable wiring accessed plate.
- Miro 4 specular enhanced aluminum reflector, 95% reflectance.
- Baked white polyester finish.
- Electronic ballast.

AVAILABLE WITH

- Variety of lenses
- Special ballast
- Multi-level switching
- White aluminum reflector

SRGBL220-6-2B-CA-EB40

TEST NO.=LA-T0305
LAMP TYPE=F40BX
NO. OF LAMP=6
LUMENS PER LAMP=3150
WATTS PER LAMP=40
BALLAST FACTOR=1
PHOTOMETRY TYPE=C

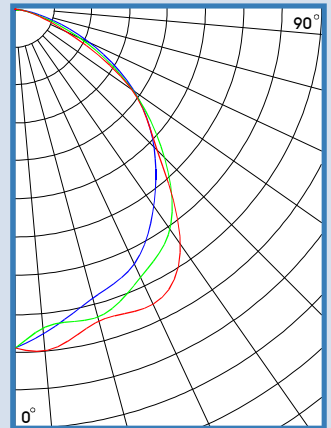

CANDLEPOWER

Angle	End	45	Cross
0	5384	5384	5384
5	5175	5084	5448
15	4757	5065	5131
25	4471	4706	5176
35	3837	4284	4580
45	3126	3367	3207
55	2339	2320	2302
65	1386	1238	1029
75	847	398	346
85	66	66	63
90	2	12	11
95	3	11	11
105	1	6	9
115	1	6	8
125	0	3	6
135	0	1	3
145	0	0	1
155	0	0	0
165	0	0	0
175	0	0	0
180	0	0	0

ZONAL LUMEN SUMMARY

DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	4121	21.8	31.4
0-40	6789	35.9	51.7
0-60	11400	60.3	86.8
0-90	13116	69.4	99.8
90-120	21	0.1	0.2
90-130	23	0.1	0.2
90-150	25	0.1	0.2
90-180	25	0.1	0.2
0-180	13141	69.5	100.0

Luminaire Efficiency = 69.5%

SPACING CRITERION

ALONG	ACROSS
1.15	1.33



LOS ANGELES LIGHTING MFG. CO.

10141 OLNEY ST. / EL MONTE, CA 91731

<http://www.lalighting.com>

TEL : 626-454-8300 FAX : 626-454-8399

