



BAYLIGHTER® HBN 100


11" WIDE INDUSTRIAL HIGH BAY LUMINAIRE



JOB	
TYPE	
DATE	

DIMENSIONS

HBN 100 - CROSS SECTION

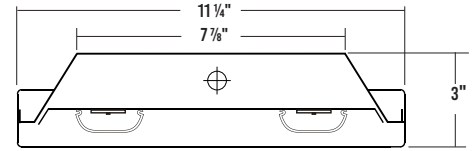


⊕ 2" K.O. ⊕ 7/8" K.O. ◆ 11/16" STEM MOUNTING K.O. ● V-HOOK HOLE



Frosted acrylic lenses




Without lenses




Optional wire guard


2' BACKPLATE



4' BACKPLATE

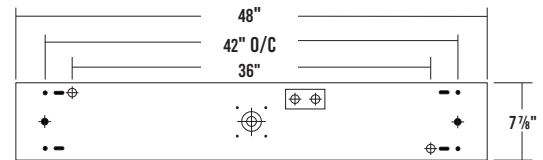

8' BACKPLATE

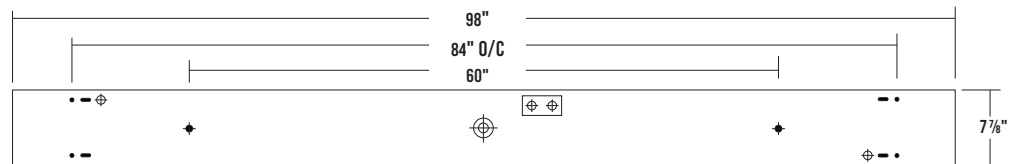

SPECIFICATIONS

CONSTRUCTION

- 22 gauge die-formed cold-rolled steel housing

FINISH

- Baked white polyester finish / minimum reflectance 86%
- End plates - powder coated finish / painted after fabrication

OPTICAL

- Standard options: frosted acrylic lenses or no lenses

ELECTRICAL

- High efficiency drivers coupled with long-life LEDs
- Service life tested at 50,000 hours (L70)
- Universal voltage 120V through 277V (347V / 480V available)
- Power Factor (PF) ≥ 0.9
- Total Harmonic Distortion (THD) ≤ 20%

LISTING

- UL USA and Canada listed / suitable for damp locations

WARRANTY

5-Year limited warranty standard. 10-Year limited warranty also available

APPLICATIONS

- Warehouse, Industrial, Commercial

FEATURES

- 0-10V Dimming driver standard
- Safety cables attach LED tray to housing for easy installation and maintenance
- Supports California Title 24 compliance

OPTIONS CONTACT CUSTOMER SERVICE FOR ADDITIONAL OPTIONS

- High (HT) ambient temperature
- Controls
- Custom housing colors
- Emergency battery pack
- Pendant mount adapter
- 20 gauge cold-rolled steel
- 0.040 aluminum housing available
- Cord & plug
- Customization available upon request

CUSTOM COLORS

BLK - Matte Black

CS - Camaro Silver

BZ - Statuary Bronze



Variety of RAL colors available upon request.



Los Angeles Lighting Mfg. Co.
 Contact Us
 T: 626-454-8300
 F: 626-454-8399
 www.lalighting.com
 10141 Olney Street
 El Monte, CA 91731
 Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2024 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 04/03/25



ORDERING INFORMATION

ADDITIONAL OPTIONS AVAILABLE. VISIT WWW.LALIGHTING.COM/RESOURCES FOR MORE INFORMATION

EXAMPLE: HBN100-24-4L-BPL3.0-DRDM-UNV-2/850HT



SERIES	NOMINAL LED LUMENS	NOMINAL LENGTH	OPTICAL	MECHANICAL	CONTROLS	ELECTRICAL	DRIVER	VOLTAGE	# OF LED ROWS	CRI / CCT	AMBIENT TEMP.	
HBN100									2			
HBN100 • 11" Wide Industrial High Bay	8 - 8000lm 12 - 12000lm 16 - 16000lm (HT only)	2L • 2'	(Blank) • No Lens Assembly FRA • Frosted Acrylic Lenses	RN ¹ • Rivet Nut (required for SMA mounting adapter - see accessories section) *Leave blank if not specified	MS • PIR Motion Sensor, On/Off MSPCSDO • PIR Motion Sensor w/Photocell, High/Low/Off MSPCDBT • PIR Motion Sensor w/ Photocell, High/Low, Adjustable WLC(AWNR-WH) • Lutron Athena wireless node (RF) WLC(AWNS-WH) • Lutron Athena wireless node w/ sensor Additional Lutron options on page (7) *Leave blank if not specified	BPL1.5 • Emergency Battery Pack 1500 lm BPL3.0 • Emergency Battery Pack 3000 lm C(xx) • Cord 18 ga. 3-wire • Plug Options • NEMA Plug Type • Length of Cord • Location on the fixture *Leave blank if not specified	DRDM • 0-10V Dimming Driver DRSD ² • Step Dimming Driver DR2W • 2-Wire Phase Dimming Driver • Requires Specific Voltage Callout	UNV • 120V-277V 120V • 120 Volt 277V • 277 Volt 347V • 347 Volt 480V • 480 Volt	2 • 2 LED Rows	827 • 80+CRI / 2700K 830 ³ • 80+CRI / 3000K 835 • 80+CRI / 3500K 840 • 80+CRI / 4000K 850 • 80+CRI / 5000K 865 • 80+CRI / 6500K 8TW ³ • 80+CRI Tunable White 2700K-6500K Requires DRDM2C driver 90CRI Also available Contact customer service for additional CRI/CCT packages.	HT ⁴ • High Ambient Temp. *Leave blank if not specified	
	8 - 8000lm 12 - 12000lm 16 - 16000lm 24 - 24000lm (HT only) 32 - 32000lm (HT only) High Efficacy 8HE - 8000lm 12HE - 12000lm 14HE - 14000lm	4L • 4'										
	24 - 24000lm 32 - 32000lm 48 - 48000lm (HT only) 64 - 64000lm (HT only) Contact customer service for additional lumen packages.	8L • 8'										

Standard options for HBN100 shown above. For additional options, including lumen packages, controls, lenses, switches, finishes, and more, visit www.lalighting.com/resources or contact customer service.

- ¹ Rivet Nut only available for 4' models
- ² DRSD and DR2W not available for HT systems
- ³ 830 CRI/CCT and 8TW options not available for HT systems
- ⁴ HT cannot be combined with High Efficacy (HE) systems.

ACCESSORIES

Wire Guard Clips




Wire Guard



- 11 gauge wire guard, powder coated finish
- Includes all necessary wire guard attachment clips

CATALOG NUMBER	ACCESSORY DESCRIPTION
WG11-HBN100-2L	2' WIRE GUARD
WG11-HBN100-4L	4' WIRE GUARD (TWO REQUIRED FOR 8' LUMINAIRES)

Y-TOGGLE-END / CABLE SUSPENSION SYSTEM

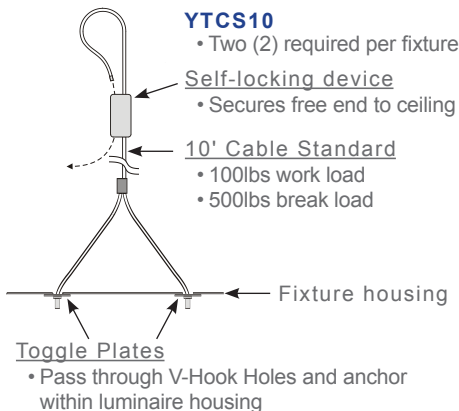

CABLE SUSPENSION SYSTEM

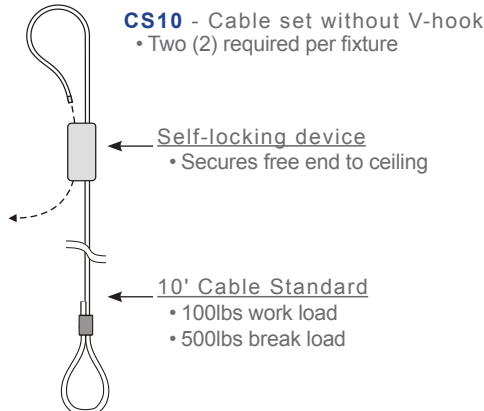

V-HOOK

- Hooks attach to V-Hook Holes on luminaire or chain mount coupling tabs
- Two (2) required per luminaire

FOR FIXTURE SERIES	CAT. NO
6" LEG HEIGHT	V6



Los Angeles Lighting Mfg. Co.
 Contact Us
 T: 626-454-8300
 F: 626-454-8399
 www.lalighting.com
 10141 Olney Street
 El Monte, CA 91731
 Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2024 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.



Revised: 04/03/25



ACCESSORIES

SMA - Pendant Mounting Adapter with Safety Cable

- Designed for single point pendant mount applications
 - 20 gauge galvanized steel mounting adapter for 3/4" pipe
 - Adapter box serves as enclosure for electrical connection to luminaire
 - Includes safety cable to be attached to building structure
 - Must specify RN (Rivet Nut) option in luminaire part number.
- Example: **HBN100-24-4L-RN-DRDM-UNV-2/850HT**

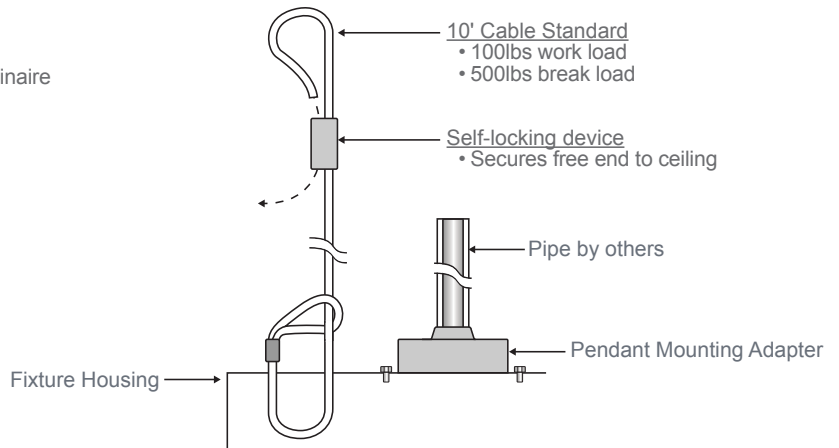

SENSORS AND CONTROLS

MS - PIR Motion Sensor – On/Off

- Turns luminaire on/off in response to motion

MSPCSDO - PIR Motion Sensor with Photocell – High/Low/Off

- Holds luminaire OFF when sufficient ambient light is present, regardless of motion
- When ambient light levels are low, turns luminaire on/off and increases/decreases illumination in response to motion

MSPCDBT - PIR Motion Sensor with Photocell – High/Low – Bluetooth Programming

- Holds luminaire OFF when sufficient ambient light is present, regardless of motion
- When ambient light levels are low, increases/decreases illumination in response to motion
- Field-adjustable via Bluetooth® app. Please specify preferred sensor manufacturer.

WLC(AWNR-WH) - Lutron Athena wireless node (RF)

- RF communication node. One per luminaire, integrally mounted.

WLC(AWNS-WH) - Lutron Athena wireless node w/sensor

- RF, plus daylight/occupancy sensing. One per luminaire, integrally mounted.



Los Angeles Lighting Mfg. Co.
 Contact Us
 T: 626-454-8300
 F: 626-454-8399
 www.lalighting.com
 10141 Olney Street
 El Monte, CA 91731
 Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2024 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 04/03/25



SYSTEM DATA

ADDITIONAL LUMEN PACKAGES AVAILABLE. CONTACT CUSTOMER SERVICE FOR MORE INFORMATION

2' Normal Ambient Temperature

2' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
8000 Lumens (Nominal)	HBN100-8-2L-DRDM-UNV-2/850	8273 lm	50.8	162.7 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F24T5HO 2-F54T5HO	LA-T3845a
8000 Lumens (Nominal)	HBN100-8-2L-FRA-DRDM-UNV-2/850	7888 lm	50.8	155.1 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F24T5HO 2-F54T5HO	LA-T3844a
12000 Lumens (Nominal)	HBN100-12-2L-DRDM-UNV-2/850	11975 lm	74.9	159.8 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F24T5HO 2-F54T5HO	*
12000 Lumens (Nominal)	HBN100-12-2L-FRA-DRDM-UNV-2/850	11537 lm	74.9	154.0 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F24T5HO 2-F54T5HO	*

2' High Ambient Temperature

2' - LED LUMEN PACKAGE	HIGH AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
8000 Lumens (Nominal)	HBN100-8-2L-DRDM-UNV-2/850HT	8121 lm	48.3	168.1 lm/W	-30°C / 50°C (-22°F / 122°F)	4-F24T5HO 2-F54T5HO	*
8000 Lumens (Nominal)	HBN100-8-2L-FRA-DRDM-UNV-2/850HT	7824 lm	48.3	161.9 lm/W	-30°C / 50°C (-22°F / 122°F)	4-F24T5HO 2-F54T5HO	*
12000 Lumens (Nominal)	HBN100-12-2L-DRDM-UNV-2/850HT	11975 lm	75.3	159.0 lm/W	-30°C / 50°C (-22°F / 122°F)	6-F24T5HO 3-F54T5HO	*
12000 Lumens (Nominal)	HBN100-12-2L-FRA-DRDM-UNV-2/850HT	11537 lm	75.3	153.2 lm/W	-30°C / 50°C (-22°F / 122°F)	6-F24T5HO 3-F54T5HO	*
16000 Lumens (Nominal)	HBN100-16-2L-DRDM-UNV-2/850HT	16166 lm	100.6	160.5 lm/W	-30°C / 50°C (-22°F / 122°F)	8-F24T5HO 4-F54T5HO	*
16000 Lumens (Nominal)	HBN100-16-2L-FRA-DRDM-UNV-2/850HT	15575 lm	100.6	154.6 lm/W	-30°C / 50°C (-22°F / 122°F)	8-F24T5HO 4-F54T5HO	*

4' Normal Ambient Temperature

4' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
8000 Lumens (Nominal)	HBN100-8-4L-DRDM-UNV-2/850	8157 lm	52.6	154.8 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F32T8 2-F54T5HO	*
8000 Lumens (Nominal)	HBN100-8-4L-FRA-DRDM-UNV-2/850	7835 lm	52.6	148.7 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F32T8 2-F54T5HO	*
12000 Lumens (Nominal)	HBN100-12-4L-DRDM-UNV-2/850	12334 lm	81.9	150.5 lm/W	-20°C / 35°C (-4°F / 95°F)	6-F32T8,3-F54T5HO	*
12000 Lumens (Nominal)	HBN100-12-4L-FRA-DRDM-UNV-2/850	11847 lm	81.9	144.6 lm/W	-20°C / 35°C (-4°F / 95°F)	6-F32T8,3-F54T5HO	*
16000 Lumens (Nominal)	HBN100-16-4L-DRDM-UNV-2/850	16196 lm	98.1	165.1 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F54T5HO	LA-T3847a
16000 Lumens (Nominal)	HBN100-16-4L-FRA-DRDM-UNV-2/850	15437 lm	98.1	157.3 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F54T5HO	LA-T3846b

4' Normal Ambient Temp High Efficacy

4' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE (HIGH EFFICACY) PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
8000 Lumens (Nominal)	HBN100-8HE-4L-DRDM-UNV-2/850	7984 lm	45.2	176.3 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F32T8 2-F54T5HO	*
8000 Lumens (Nominal)	HBN100-8HE-4L-FRA-DRDM-UNV-2/850	7669 lm	45.2	169.3 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F32T8 2-F54T5HO	*
12000 Lumens (Nominal)	HBN100-12HE-4L-DRDM-UNV-2/850	12062 lm	71.1	169.5 lm/W	-20°C / 35°C (-4°F / 95°F)	6-F32T8,3-F54T5HO	*
12000 Lumens (Nominal)	HBN100-12HE-4L-FRA-DRDM-UNV-2/850	11585 lm	71.1	162.8 lm/W	-20°C / 35°C (-4°F / 95°F)	6-F32T8,3-F54T5HO	*
14000 Lumens (Nominal)	HBN100-14HE-4L-DRDM-UNV-2/850	13981lm	83.7	166.9 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F54T5HO	*
14000 Lumens (Nominal)	HBN100-14HE-4L-FRA-DRDM-UNV-2/850	13429 lm	83.7	160.3 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F54T5HO	*

NOTE:
System data is based on 120V input voltage. Actual performance may differ as a result of end-user environment and application.
This fixture has been tested and listed in accordance with UL Standards, L.A. Lighting certifies that it will operate safely when installed properly, and within an ambient temperature range noted in the system data table.
Additional lumen packages and color temperatures available.



Los Angeles Lighting Mfg. Co.
Contact Us
T: 626-454-8300
F: 626-454-8399
www.lalighting.com

10141 Olney Street
El Monte, CA 91731
Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice.
Please visit our website to view the most current information.

© 2024 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 04/03/25



SYSTEM DATA

ADDITIONAL LUMEN PACKAGES AVAILABLE. CONTACT CUSTOMER SERVICE FOR MORE INFORMATION

4' High Ambient Temperature

4' - LED LUMEN PACKAGE	HIGH AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
8000 Lumens (Nominal)	HBN100-8-4L-DRDM-UNV-2/850HT	7982 lm	44.1	180.9 lm/W	-30°C / 50°C (-22°F / 122°F)	4-F32T8 2-F54T5HO	LA-T3848a
8000 Lumens (Nominal)	HBN100-8-4L-FRA-DRDM-UNV-2/850HT	7672 lm	44.1	173.9 lm/W	-30°C / 50°C (-22°F / 122°F)	4-F32T8 2-F54T5HO	*
12000 Lumens (Nominal)	HBN100-12-4L-DRDM-UNV-2/850HT	12209 lm	68.7	177.5 lm/W	-30°C / 50°C (-22°F / 122°F)	6-F32T8,3-F54T5HO	LA-T3849a
12000 Lumens (Nominal)	HBN100-12-4L-FRA-DRDM-UNV-2/850HT	11727 lm	68.7	170.5 lm/W	-30°C / 50°C (-22°F / 122°F)	6-F32T8,3-F54T5HO	*
16000 Lumens (Nominal)	HBN100-16-4L-DRDM-UNV-2/850HT	16284 lm	95.0	171.3 lm/W	-30°C / 50°C (-22°F / 122°F)	4-F54T5HO	LA-T3723a
16000 Lumens (Nominal)	HBN100-16-4L-FRA-DRDM-UNV-2/850HT	15645 lm	95.0	164.6 lm/W	-30°C / 50°C (-22°F / 122°F)	4-F54T5HO	*
24000 Lumens (Nominal)	HBN100-24-4L-DRDM-UNV-2/850HT	24017 lm	149.6	160.5 lm/W	-30°C / 50°C (-22°F / 122°F)	6-F54T5HO	*
24000 Lumens (Nominal)	HBN100-24-4L-FRA-DRDM-UNV-2/850HT	23069 lm	149.6	154.2 lm/W	-30°C / 50°C (-22°F / 122°F)	6-F54T5HO	*
32000 Lumens (Nominal)	HBN100-32-4L-DRDM-UNV-2/850HT	32031 lm	197.3	162.3 lm/W	-30°C / 50°C (-22°F / 122°F)	8-F54T5HO	*
32000 Lumens (Nominal)	HBN100-32-4L-FRA-DRDM-UNV-2/850HT	30782 lm	197.3	156.0 lm/W	-30°C / 40°C (-22°F / 104°F)	8-F54T5HO	*

8' Normal Ambient Temperature

8' - LED LUMEN PACKAGE	NORMAL AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
24000 Lumens (Nominal)	HBN100-24-8L-DRDM-UNV-2/850	24308 lm	160.9	151.0 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F32T8, 2-F54T5HO, 175W MH	*
24000 Lumens (Nominal)	HBN100-24-8L-FRA-DRDM-UNV-2/850	23332 lm	160.9	145.0 lm/W	-20°C / 35°C (-4°F / 95°F)	4-F32T8, 2-F54T5HO, 175W MH	*
32000 Lumens (Nominal)	HBN100-32-8L-DRDM-UNV-2/850	32046 lm	194.7	164.5 lm/W	-20°C / 35°C (-4°F / 95°F)	6-F32T8, 3-F54T5HO, 250W MH	*
32000 Lumens (Nominal)	HBN100-32-8L-FRA-DRDM-UNV-2/850	30504 lm	194.7	156.6 lm/W	-20°C / 35°C (-4°F / 95°F)	6-F32T8, 3-F54T5HO, 250W MH	*

8' High Ambient Temperature

8' - LED LUMEN PACKAGE	HIGH AMBIENT TEMPERATURE PRODUCT CODE	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	AMBIENT TEMP.	FLUORESCENT EQUIVALENT	IES FILES
24000 Lumens (Nominal)	HBN100-24-8L-DRDM-UNV-2/850HT	24013 lm	136.3	176.1 lm/W	-30°C / 50°C (-22°F / 122°F)	4-F32T8, 2-F54T5HO, 175W MH	*
24000 Lumens (Nominal)	HBN100-24-8L-FRA-DRDM-UNV-2/850HT	23049 lm	136.3	169.0 lm/W	-30°C / 50°C (-22°F / 122°F)	4-F32T8, 2-F54T5HO, 175W MH	*
32000 Lumens (Nominal)	HBN100-32-8L-DRDM-UNV-2/850HT	32189 lm	188.2	171.0 lm/W	-30°C / 50°C (-22°F / 122°F)	4-F32T8, 2-F54T5HO, 175W MH	LA-T3711
32000 Lumens (Nominal)	HBN100-32-8L-FRA-DRDM-UNV-2/850HT	30896 lm	188.2	164.1 lm/W	-30°C / 50°C (-22°F / 122°F)	4-F32T8, 2-F54T5HO, 175W MH	LA-T3803a
48000 Lumens (Nominal)	HBN100-48-8L-DRDM-UNV-2/850HT	48050 lm	295.2	162.7 lm/W	-30°C / 50°C (-22°F / 122°F)	6-F32T8, 3-F54T5HO, 250W MH	LA-T3801a
48000 Lumens (Nominal)	HBN100-48-8L-FRA-DRDM-UNV-2/850HT	46124 lm	295.2	156.2 lm/W	-30°C / 50°C (-22°F / 122°F)	6-F32T8, 3-F54T5HO, 250W MH	*
64000 Lumens (Nominal)	HBN100-64-8L-DRDM-UNV-2/850HT	64122 lm	394.4	162.5 lm/W	-30°C / 50°C (-22°F / 122°F)	8-F32T8, 4-F54T5HO, 400W MH	*
64000 Lumens (Nominal)	HBN100-64-8L-FRA-DRDM-UNV-2/850HT	61547 lm	394.4	156.0 lm/W	-30°C / 40°C (-22°F / 104°F)	8-F32T8, 4-F54T5HO, 400W MH	*

NOTE:
 System data is based on 120V input voltage. Actual performance may differ as a result of end-user environment and application.
 This fixture has been tested and listed in accordance with UL Standards. L.A. Lighting certifies that it will operate safely when installed properly, and within an ambient temperature range noted in the system data table.
 Additional lumen packages and color temperatures available.



Los Angeles Lighting Mfg. Co.
 Contact Us
 T: 626-454-8300
 F: 626-454-8399
 www.lalighting.com
 10141 Olney Street
 El Monte, CA 91731
 Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice.
 Please visit our website to view the most current information.

© 2024 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.


Revised: 04/03/25



PHOTOMETRIC DATA

HBN100-16-4L-FRA-DRDM-UNV-2/850
TEST NO. = LA-T3847a
LED TYPE = 48 LED MODULE
NO. OF MODULE = 4
SYSTEM WATT (W) = 98.1
CRI ≥ 80
L70(Hrs.) ≥ 50,000
PHOTOMETRY TYPE = C

SPACING CRITERION	
ALONG	ACROSS
1.25	1.23



ZONAL LUMEN SUMMARY			
DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	4202	25.9	33.6
0-40	6915	42.6	53.5
0-60	12436	76.7	85.8
0-90	16191	99.8	100.0
90-120	4.2	0.2	0.0
90-150	4.2	0.2	0.0
90-180	4.2	0.2	0.0
0-180	16195	99.2	100.0

Luminaire Output = 16195 lumens
 Luminaire Efficacy = 127.60 lm/W
 Luminaire Efficiency = 99.92%



Los Angeles Lighting Mfg. Co.
 Contact Us
 T: 626-454-8300
 F: 626-454-8399
 www.lalighting.com
 10141 Olney Street
 El Monte, CA 91731
 Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2024 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 04/03/25





WIRELESS CONTROLS

Vive Systems

Vive PowPak Wireless Fixture Controls

WLC(FCJS0) - PowPak Wireless Fixture Control

- RF only. For use with 0-10V drivers.
- One fixture control per luminaire, typically end-mounted via 1/2" KO.

WLC(FCJS0S) - PowPak Wireless Fixture Control with Sensor

- RF with daylight/occupancy sensing. For use with 0-10V drivers.
- One fixture control per luminaire, typically end-mounted via 1/2" KO.
- Sensor must be installed separately.

WLC(FCJSE) - PowPak EcoSystem Wireless Fixture Control

- RF only. For use with Lutron EcoSystem drivers.
- One fixture control per luminaire, typically end-mounted via 1/2" KO.

WLC(FCJSES) - PowPak EcoSystem Wireless Fixture Control with Sensor

- RF with daylight/occupancy sensing. For use with Lutron EcoSystem drivers.
- One fixture control per luminaire, typically end-mounted via 1/2" KO.
- Sensor must be installed separately.

Vive PowPak Sensors

*FC-SENSOR - PowPak Occupancy/Daylight Sensor

- For luminaires with existing PowPak Wireless Fixture Controls.
- Turns luminaire ON/OFF based on motion. Adjusts lumen output in response to ambient light.
- Recommended mounting height: 8-12ft

*FC-VSENSOR - PowPak Vacancy/Daylight Sensor

- For luminaires with existing PowPak Wireless Fixture Controls.
- Turns luminaire OFF when area is vacant. Adjusts lumen output in response to ambient light.
- Recommended mounting height: 8-12ft.

Vive Integral Fixture Controls

WLC(VRF) - Vive Integral Wireless Fixture Control

- RF only. Requires controls-ready driver.
- One fixture control per luminaire, mounting location varies by luminaire.

WLC(VDO) - Vive Integral Wireless Fixture Control

- RF, plus daylight/occupancy sensing. Requires controls-ready driver.
- One fixture control per luminaire, mounting location varies by luminaire.
- Turns luminaire ON/OFF based on motion. Adjusts lumen output in response to ambient light.
- Coverage area at 9ft mounting height: Up to 300 sq.ft for major motions; 150 sq.ft. for minor motions.

How to Order

Pre-installed components are ordered by adding the part number to the luminaire:

GHL320-4-4L-FSW-PA- [WLC\(FCJS0\)](#) -DRDM-UNV-2/840

Components marked with * are ordered separately

Athena Wireless Nodes

Requires Athena-compatible drivers and Clear Connect Gateway - Type X

WLC(AWNR-WH) - Wireless Node (White)

- RF communication node. One per luminaire, integrally mounted.

WLC(AWNS-WH) - Wireless Node (White) with Sensor

- RF, plus daylight/occupancy sensing. One per luminaire, integrally mounted.

WLC(AWNR-BL) - Wireless Node (Black)

RF communication node. One per luminaire, integrally mounted.

WLC(AWNS-BL) - Wireless Node (Black) with Sensor

- RF, plus daylight/occupancy sensing. One per luminaire, integrally mounted.



WLC(AWNR-WH)
Athena Wireless Node



WLC(FCJS0)
PowPak Wireless Fixture Control



FC-SENSOR
PowPak Occupancy/Daylight Sensor



WLC(VDO)
Vive Integral Wireless Fixture Control

Lutron, Vive, Athena, PowPak, EcoSystem, Pico, and Clear Connect are trademarks or registered trademarks of Lutron Electronics Co., Inc., in the U.S. and/or other countries.



Los Angeles Lighting Mfg. Co.
Contact Us
T: 626-454-8300
F: 626-454-8399
www.lalighting.com

10141 Olney Street
El Monte, CA 91731
Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.

© 2024 LOS ANGELES LIGHTING MANUFACTURING CO. ALL RIGHTS RESERVED.

Revised: 04/03/25

