

RESOURCES MOUNTING HARDWARE


Contact customer service for more information about mounting options

B Not all mounting hardware options are suitable for all fixtures.

HANGER YOKES

- Used to secure recessed flanged fixtures to support frame in hard ceilings
- Compatible with all types of recessed flanged fixtures
- Provided screws secure hanger yoke to fixture through knockouts in top of housing
- Two hanger yokes required for each 2', 3', or 4' fixture. Four hanger yokes required for each 6' or 8' fixture.


CAT. NO	LUMINAIRE MODEL	Н	W
HS-6 1/2	FFF106, FHL306, FWW206	5%"	6 ½"
HS-10 1/2	FWW210		10 ½"
HS-12	FCL200, FCR210, FCR710, FSE110, FWL310		12"
HS-12 1/2	FDC310, FHB100, FHL310, FIC110, FPA310, FPA610		12 ½"
HS-20	FHL315		20"
HS-24 1/2	FBL220, FBL229, FCR220, FCR221, FCR720, FCR721, FDC320, FHL320, FIC120, FPA320, FPA620, FSE120, FWL320, RER120		24 ½"
HS-36 1/2	FDH430, FHL330, RER130		36 ½"
HS-48 1/2	FDH440, FHL340, RER140		48 ½"



SWING-OUT JACKS

- Spring-loaded adjustable mounting brackets used to secure recessed flanged fixtures to support frame in hard ceilings
- · Compatible with recessed flanged fixtures shown below
- Four swing-out jacks per set; 1 set required per fixture

CAT. NO	LUMINAIRE MODEL	
201	FBL220, FBL229, FDH430, FDH440, FHB100, FHL310, FHL315, FHL320, FHL330, FHL340, FPA310, FPA320, FPA610, FPA620	
SOJ-FDC-2	2' FDC320 (INCLUDES SUPPORT PLATES)	
SOJ-FDC-4	FDC310, 4' FDC320 (INCLUDES SUPPORT PLATES)	




CANOPY / CABLE SUSPENSION SYSTEMS

· Self-locking, one-step adjustable suspension device with canopy



433B


- · Canopy with cable
- No power cord
- · Cable length 48" and 96"
- · Max. Weight 196 lbs.





444F

- · Feed-in canopy with straight cord
- Includes power cord
- · Cable length 48" and 96"
- Max. Weight 196 lbs



96 - 96 inches

(other lengths as specified)



Los Angeles Lighting Mfg. Co.


Contact Us T: 626-454-8300 F: 626-454-8399 www.lalighting.com

10141 Olney Street El Monte, CA 91731 Made in the USA



Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice.

Please visit our website to view the most current information.





THREADED MOUNTING STEMS


STEM

- 3/8" IPS, nominal OD 5/8"
- Threaded 1" each end
- 2 lock nuts provided per stem
- Standard lengths: 6", 12", 18", 24", 30", 36", 48"
- · Baked white enamel finish
- To order, specify length required after STEM.
 Example: STEM12 for 12", STEM24 for 24", etc.

Other lengths & finishes are available as specified




Stem Length Calculation



- A = Distance from ceiling to bottom of fixture
- B = Stem length
- C = Height of fixture

Stem Length B = A - C

Y-TOGGLE-END / CABLE SUSPENSION SYSTEM



<u>Toggle Plates</u>
• Pass through V-Hook Holes and anchor within luminaire housing

CABLE SUSPENSION SYSTEM

CS10 - Cable system without V-hook
• Two (2) required per fixture

· Secures free end to ceiling

_10' Cable Standard

Self-locking device

- 100lbs work load
- 500lbs break load

V-HOOK / CABLE SUSPENSION SYSTEMS

V4CS10 - Cable system w/ V4-Hook V6CS10 - Cable system w/ V6-Hook

• Two (2) required per fixture

Self-locking device
 Secures free end to ceiling

10' Cable Standard

• 100lbs work load

V-HOOK

500lbs break load

V-HOOKS




- Two (2) required per luminaire
- Custom colors available.

FOR FIXTURE SERIES	CAT. NO
4" LEG HEIGHT (110/200/240/500) Series	V4
6" LEG HEIGHT (300/400) Series	V6







Contact Us T: 626-454-8300 F: 626-454-8399 www.lalighting.com 10141 Olney Street El Monte, CA 91731 Made in the USA





CHAIN MOUNT COUPLINGS

- · Used when suspending luminaires in end-to-end continuous rows
- · Lift-up tabs allow V-Hooks to be attached
- Baked white enamel finish (custom colors available)







LUMINAIRE MODEL	CAT. NO.
IND200, IND500, IND600, STR200, STR500	CMC-200
IND240, STR240	CMC-240
IND220, KDI200, KDS200, STR220	CMC-245
IND300, STR300	CMC-300
IND400, STR400	CMC-400
MXIND210, MXSTR210	CMC-MX210
INW105, INW110	CMC-INW1XX
STW100 (ONLY FOR 4FT & 8FT FIXTURES)	CMC-STW100
INW200, STW200	CMC-XXW200

45° MOUNTING BRACKET


45MB


- Designed for mounting luminaires at 45° angle
- · Ideal for wall or ceiling mount applications
- 18 gauge electro-galvanized steel
- Baked white powder-coated finish (custom colors available)
- Two mounting brackets required for each 2' 4', or 8' luminaire
- · Must drill own mounting holes on back of luminaire
- · Mounting hardware not provided

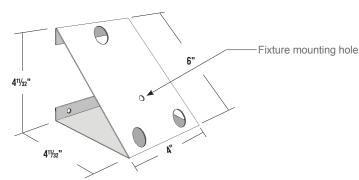
















CEILING SPACERS

- Minimum one (1) of each per fixture
- · May need to drill own holes





CS-3

 Closed spacer, spaces fixture 11/2" from ceiling when required by code Feed-in spacer mounts to junction box, spaces fixture 11/2" from ceiling

CHANNEL HANGERS

- Spaces fixture 11/2" from ceiling while allowing easy installation along side groove
- · Baked white enamel finish



LUMINAIRE MODEL	CAT. NO.
IND200, IND500, IND600, STR200, STR500	CH-200
IND240, STR240	CH-240
IND300, STR300	CH-300
IND400, STR400	CH-400
HBI600, HBI609, HBS100, HBW100	CH-HB
IBT100, IBT200, IBT300	CH-IBT



Los Angeles Lighting Mfg. Co.

Contact Us T: 626-454-8300 F: 626-454-8399 www.lalighting.com

10141 Olney Street El Monte, CA 91731 Made in the USA





Due to continued product improvements and enhancements, Los Angeles Lighting Manufacturing Company reserves the right to alter specifications, dimensions, data, and/or materials without notice. Please visit our website to view the most current information.



PENDANT MOUNTING ADAPTER WITH SAFETY CABLE


• Designed for single point pendant mount applications

• 20 gauge galvanized steel mounting adapter for 3/4" pipe • Adapter box serves as enclosure for electrical connection to luminaire

• Includes safety cable to be attached to building structure

• Must specify RN (Rivet Nut) option in luminaire part number. Example: HBN100-24-4L-RN-DRDM-UNV-2/850HT



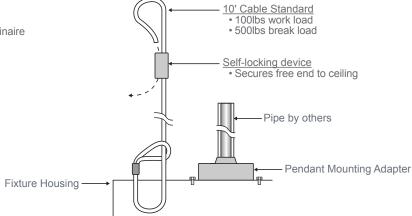



10141 Olney Street El Monte, CA 91731 Made in the USA www.lalighting.com





